

# Technical Specifications

VERSION 2019.07-001





# Therm 4

#### Heated & Non-Heated Towel Rails

#### **VARIATIONS**

Heated Version	Non-Heated Version	Height x Width	Rails	Wattage
TLH9-55 x 40	TLN9-55x40	550 x 428 mm	4	35 Watts
TLH9-55 x 48	TLN9-55 x 48	550 x 508 mm	4	40 Watts
TLH9-55 x 60	TLN9-55x60	550 x 628 mm	4	45 Watts
TLH9-55 x 75	TLN9-55 x 75	550 x 778 mm	4	50 Watts
TLH9-55 x 90	TLN9-55 x 90	550 x 928 mm	4	60 Watts

## **NOTES**

- This is a 240VAC product Earth connection is ESSENTIAL
- Concealed wiring available through any of the 4 legs
- Wire specifications: Use flexible multistrand 1.5mm²
- Non Heated version available (Less 10%)
- Plug-In version available (Plus \$20)
- TLH9-85x60 is available in Low Voltage version (+\$110)


## STANDARD FINISHES

Mirror Polished	<b>Brushed</b>	Matt Black	<b>Gunmetal</b>	<b>Brushed Gold</b>
Stainless Steel	Stainless Steel	Painted	PVD	PVD
RRP	+20% (Stocked)	+40% (Stocked)	+50% (Stocked)	+60% (Stocked)

## **SPECIFICATIONS**

<b>Voltage</b> 240 Volts	Standards AS/NZ 60335.2.43		MADE IN AUSTRALIA	
Material	Electrical Connection			
Stainless Steel 304	Concealed Wiring only - any leg (Transformer required)		HEATING TIME 30 MINUTES	
Finish			30 MINOTES	
Mirror Polished	Heating Method			
	Dry Internal Heating Element			_
Ingress Protection			WARRANTY	10
IPX5 (Suitable for wet areas)	Non-Heated version available		10 YEAR	



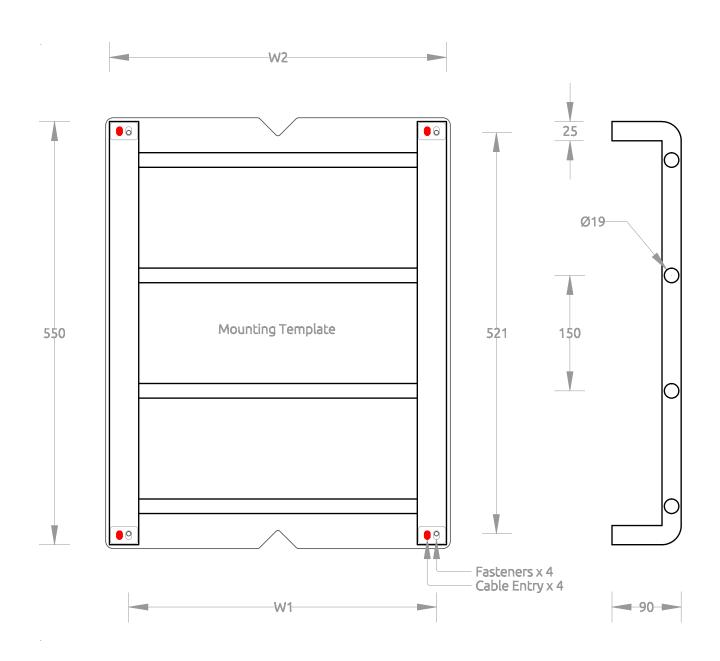



## **VARIATIONS**

Heated Version	Non-Heated Version	W1 (Fixings)	W2 (Overall)
TLH9-55x40	TLN9-55x40	400mm	438mm
TLH9-55x48	TLN9-55x48	480mm	518mm
TLH9-55x60	TLN9-55x60	600mm	638mm
TLH9-55x75	TLN9-55x75	750mm	788mm
TLH9-55x90	TLN9-55x90	900mm	938mm