

avenir[®]

Technical Specifications

VERSION 2019.07-001



Abask 4

Heated & Non-Heated Towel Rails

VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Wattage
TLH2-55 x 40	TLN2-55 x 40	550 x 428 mm	4	40 Watts
TLH2-55 x 48	TLN2-55 x 48	550 x 508 mm	4	40 Watts
TLH2-55 x 60	TLN2-55 x 60	550 x 628 mm	4	45 Watts
TLH2-55 x 75	TLN2-55 x 75	550 x 778 mm	4	50 Watts
TLH2-55 x 90	TLN2-55 x 90	550 x 928 mm	4	65 Watts




NOTES


- This is a 240VAC product - Earth connection is ESSENTIAL
- Concealed wiring available through any of the 4 legs
- Wire specifications: Use flexible multistrand 1.5mm²
- Non Heated version available (Less 10%)
- Plug-In version available (Plus \$20)
- TLH2-85x60 is available in Low Voltage version (+\$110)

STANDARD FINISHES

Mirror Polished Stainless Steel RRP	Brushed Stainless Steel +20% (Stocked)	Matt Black Painted +40% (Stocked)	Gunmetal PVD +50% (Stocked)	Brushed Gold PVD +60% (Stocked)
--------------------------------------------------	-----------------------------------------------------	------------------------------------------------	------------------------------------------	----------------------------------------------

SPECIFICATIONS

Voltage 240 Volts	Standards AS/NZ 60335.2.43	MADE IN AUSTRALIA 
Material Stainless Steel 304	Electrical Connection Concealed Wiring only - any leg (Transformer required)	HEATING TIME 30 MINUTES 
Finish Mirror Polished	Heating Method Dry Internal Heating Element	WARRANTY 10 YEAR 
Ingress Protection IPX5 (Suitable for wet areas)	Non-Heated version available	

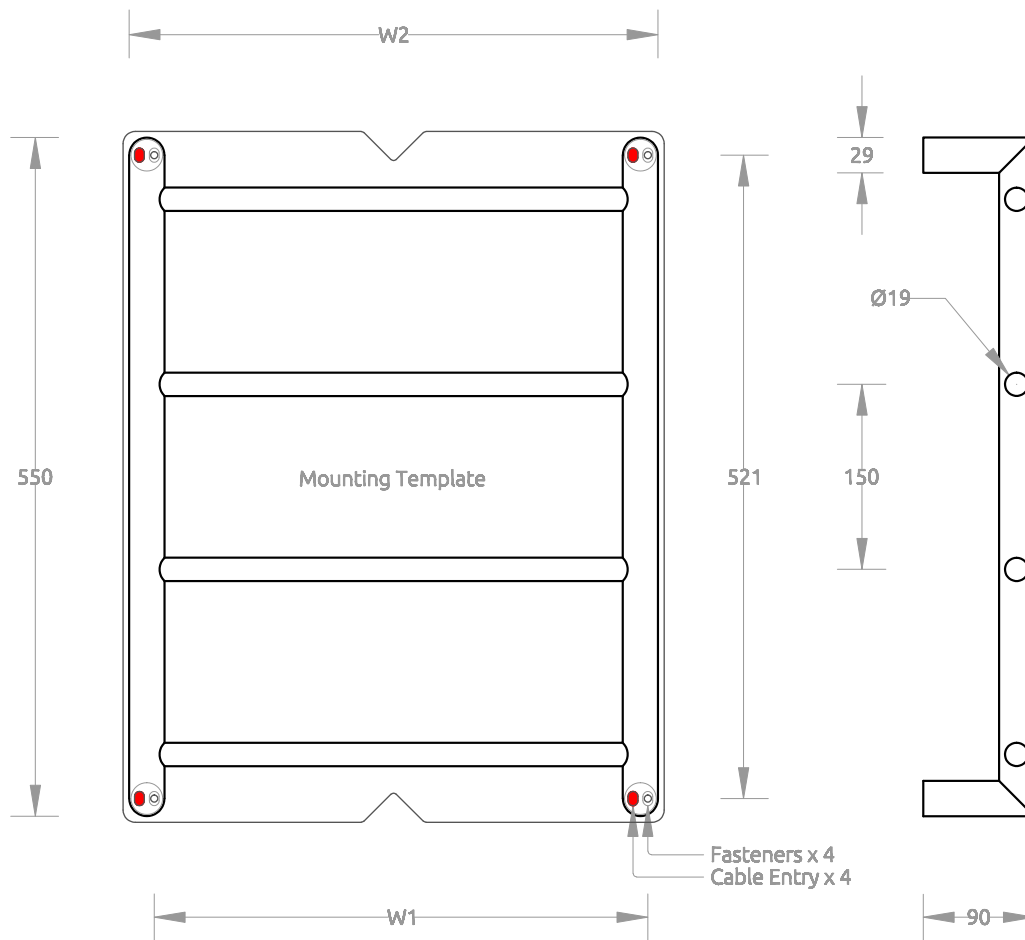

VARIATIONS

Heated Version	Non-Heated Version	W1 (Fixings)	W2 (Overall)
TLH2-55x40	TLN2-55x40	400mm	428mm
TLH2-55x48	TLN2-55x48	480mm	508mm
TLH2-55x60	TLN2-55x60	600mm	628mm
TLH2-55x75	TLN2-55x75	750mm	778mm
TLH2-55x90	TLN2-55x90	900mm	928mm