

BESPOKE TUBE - SERIES

TUMBLER BASS




BRUSHED GUNMETAL



900mm

Single Tube Model

(50mm ø x 900mm)

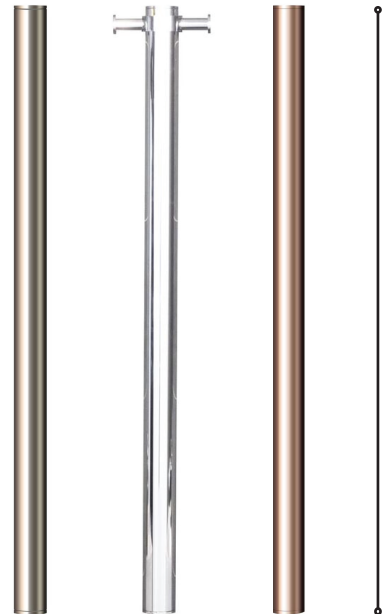

BRUSHED
NICKEL

CHROME
PLATE

BRUSHED
ROSE GOLD

* Hydrotherm Tube Series Heated Towel Rails
can be hung either vertically or horizontally

Triple Combination Tubes
with Robe Hook
(50mm ø x 900mm)

FEATURES	
Replaceable Element	Heating element easily replaced
Space Versatility	Tube rail possess unique ability to be mounted Vertically or Horizontally, single or multiple
Copper Tube	Ensures ultimate thermal conductivity and radiation.
Local Product	100% Australian owned and manufactured

SPECIFICATIONS	
Model	Electric / Non - Electric
Materials	Made entirely from Copper Tube with Brass Fittings
Element	Low wattage, replaceable water element
Power Cable	Through wall bracket - Left or Right Side - Bottom Only
Safety rating	IPX5 (allows for installation in zone 1 & 2 of bathroom)
Finish	Rose Gold, Gunmetal, Brushed Nickel, Tumbled Brass
Standards	AS/NZS:3350

Warning:


This appliance is not intended for use by young children or infirm persons without supervision. Young children should be supervised to ensure they do not play with this appliance

Caution:

Towel Rail must be installed so that the bottom rail is at least 600 mm above the floor to avoid a hazard for children.
The cord extension set must be positioned so that it is not subject to splashing or ingress of moisture .
The supply shall have means for disconnection with an air gap in all active conductors incorporated in the fixed wiring according to the Wiring Rules in AS/NZS 3000:2000



Fig 1.

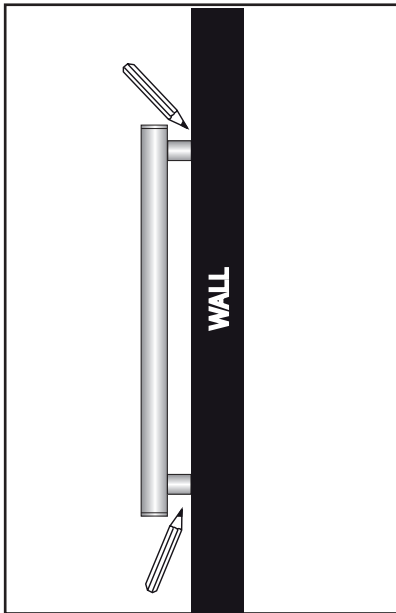

Hold Towel Rail in desired position against wall, with a pencil draw an outline around both bracket arms. Fig 1.

Take brass bracket insert and place against wall in outlined circle. Feed wall cable through wall mount channel. Using a pencil mark the screw hole position and cross it for accuracy. Mark screw hole for second brass bracket insert. Fig 2.

Drill screw holes for both brackets, insert nylon plug into wall (if applicable). If tiled wall installer MUST use a DIAMOND HEAD drill bit. Position wall bracket so that GRUB SCREW HOLES face inwards. Fig 2.

A qualified electrician must then connect towel rail element to existing wall cable.

Brass Bracket Insert - Close Up





Fig 2.

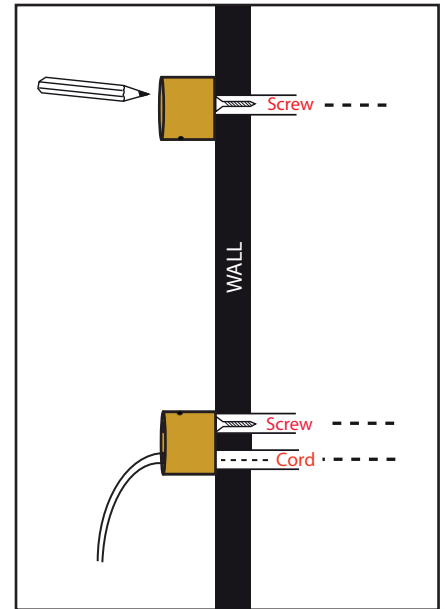

Please ensure that the measurements are taken accurately and that the screw is in a stud or noggin to provide support. DO NOT overtighten screws.

Please ensure a DIAMOND HEAD drill bit is used to drill screw and cord holes into tiled wall.

Hydrotherm take pride in the fact that all rails are individually hand made. Due to this fact some measurements may not be exact. PLEASE READ INSTRUCTIONS CAREFULLY and do not force towel rail into bracket if position of wall flange is not accurate.

Fig 3.


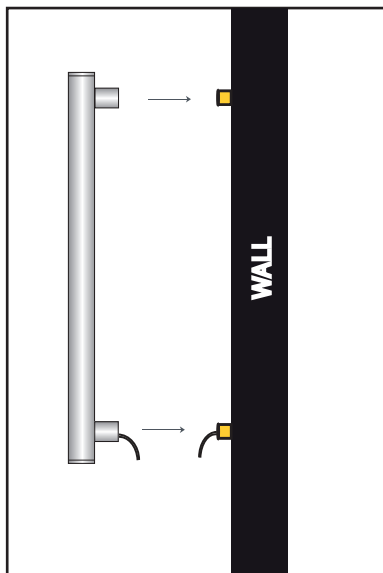


Fig 4.

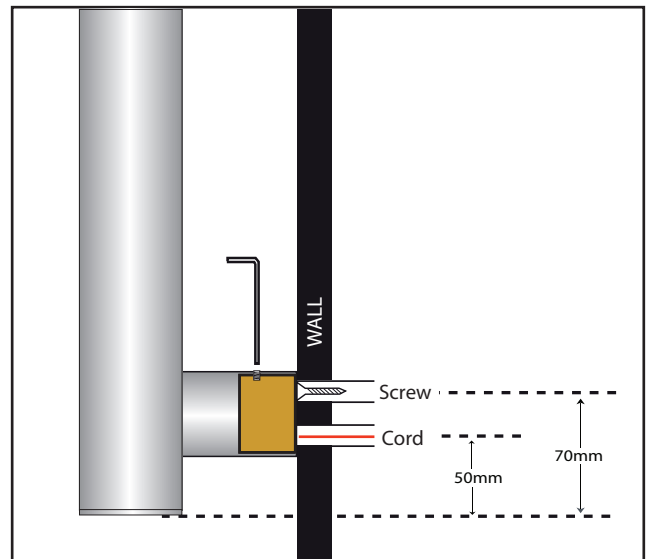

Place Towel Rail in correct position over mounted brackets, secure unit in place by tightening grub screw on inside of each bracket arm with Alan key provided. Fig 3. and Fig 4.

DO NOT OVERTIGHTEN SCREW - LEAVE SLIGHT ADJUSTMENT OF THE FLANGE (SLACK) TO ENABLE MOVEMENT WHEN THE TOWEL RAIL IS POSITIONED.

Hydrotherm will not accept responsibility for incorrectly installed brackets. Please read instructions carefully.



TOWEL RAILS MUST ALWAYS BE INSTALLED WITH THE ELECTRIC ELEMENT POSITIONED AT THE BOTTOM OF THE UNIT FOR CORRECT HEAT TRANSFER





REPLACING ELEMENT

Replacing an old element is a very simple process. All electrical wiring must be carried out by a licensed electrician.

There are Six Basic Steps:

1. You will need to obtain a 22mm tap spanner. Remove towel rail from brackets (if already installed).
2. On the side with the element cable remove push-on cap, and pull element cable through end.
3. Feed cable through spanner until you reach element hex nut.
4. Loosen element with spanner and remove.
5. Insert new element and screw in place with spanner until tight.
6. Feed element cable back through bracket hole, and refit push-on cap. Towel Rail is now ready to be re-installed.

Please note:

Hydrotherm advise that the unit be removed from the wall and turned upside down to ensure that water does not spill. Ensure element always remains at bottom of Towel Rail if being installed vertically.



Step 1.



Step 2.



Step 3.



Step 4.



Step 5.



Step 6.





HARD WIRING

Hydrotherm recommends that all hard-wired heated towel rails be connected to a light switch or timer.

Connecting hard-wired heated towel rails to a light switch or timer will prolong the life of the electric element and reduce energy consumption.

Hydrotherm recommend the brand HPM and the model XLP770TRT, this particular unit is designed specifically for heated towel rails that is incorporated into a light switch panel.



TOWEL RAILS MUST ALWAYS BE INSTALLED WITH THE ELECTRIC ELEMENT POSITIONED AT THE BOTTOM OF THE UNIT FOR CORRECT HEAT TRANSFER



HYDROTHERM WARRANTY

At Hydrotherm we pride ourselves on the highest quality standards of design and manufacturing.

All Hydrotherm products come with a 10 year manufactures warranty on the construction and finish of our towel rails.

All electric heating elements are covered by a 3 year manufactures warranty.



year

Construction & Finish
Manufacturers Warranty



year

Electric Element
Manufacturers Warranty

100% Australian Made and Owned

CARE DETAILS

This bathroom product should not be cleaned with abrasive materials eg. steel wool/scourers. Do not use any corrosive or abrasive cleaning agents containing acids or scouring agents. Bleaches can also discolour products and therefore should not be used. Damage caused by any improper treatment is not covered by the product warranty.

Disclaimer: Products in this specification manual must be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.