








Stainless Steel (10.201.102.127)

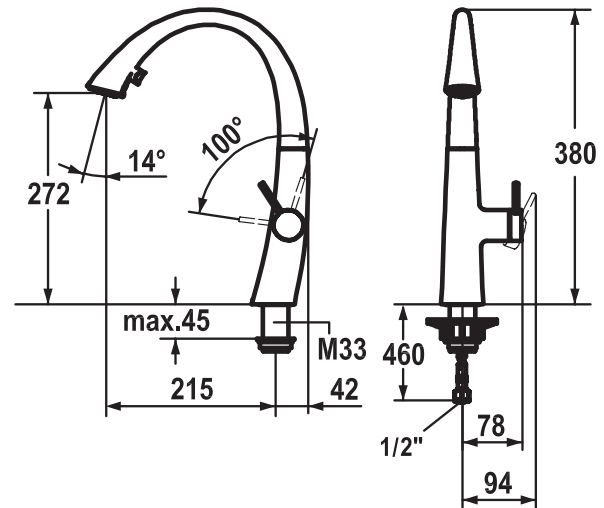

TECHNICAL SPECIFICATIONS

Spout Reach	220mm
Mounting Hole Size	ø35mm
Fastening By	M33 x1.5 threaded sleeve
Pull-Out Spray	Yes
WELS	5 star / 6 LPM
WELS Registration	T25603
Min. Flow Rate	50kPa
Max. Flow Rate	500kPa
Min. Gap Between Wall and Centre of Mounting Hole	42mm

FEATURES

-  Swivel Spout
120° range
-  Pull-Out Spray
500mm hose length
-  Spray Clean
Easy limescale removal
-  Power Clean
Adjust the water flow
-  Touch Protect
Insulated to protect your hands
-  Child Safe
Cold water facing front of lever