

# avenir<sup>®</sup>

## Technical Specifications

VERSION 2019.07-001



# Abask 6

Heated & Non-Heated Towel Rails

## VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Wattage
TLH2-85 x 40	TLN2-85 x 40	850 x 428 mm	6	52 Watts
TLH2-85 x 48	TLN2-85 x 48	850 x 508 mm	6	58 Watts
TLH2-85 x 60	TLN2-85 x 60	850 x 628 mm	6	66 Watts
TLH2-85 x 75	TLN2-85 x 75	850 x 778 mm	6	72 Watts
TLH2-85 x 90	TLN2-85 x 90	850 x 928 mm	6	93 Watts




## NOTES


- This is a 240VAC product - Earth connection is ESSENTIAL
- Concealed wiring available through any of the 4 legs
- Wire specifications: Use flexible multistrand 1.5mm<sup>2</sup>
- Non Heated version available (Less 10%)
- Plug-In version available (Plus \$20)
- TLH2-85x60 is available in Low Voltage version (+\$110)

## STANDARD FINISHES

<b>Mirror Polished</b> Stainless Steel RRP	<b>Brushed</b> Stainless Steel +20% (Stocked)	<b>Matt Black</b> Painted +40% (Stocked)	<b>Gunmetal</b> PVD +50% (Stocked)	<b>Brushed Gold</b> PVD +60% (Stocked)
--	---	--	--	--

## SPECIFICATIONS

<b>Voltage</b> 240 Volts	<b>Standards</b> AS/NZ 60335.2.43	<b>MADE IN AUSTRALIA</b> 
<b>Material</b> Stainless Steel 304	<b>Electrical Connection</b> Concealed Wiring only - any leg (Transformer required)	<b>HEATING TIME 30 MINUTES</b> 
<b>Finish</b> Mirror Polished	<b>Heating Method</b> Dry Internal Heating Element	<b>WARRANTY 10 YEAR</b> 
<b>Ingress Protection</b> IPX5 (Suitable for wet areas)	Non-Heated version available	

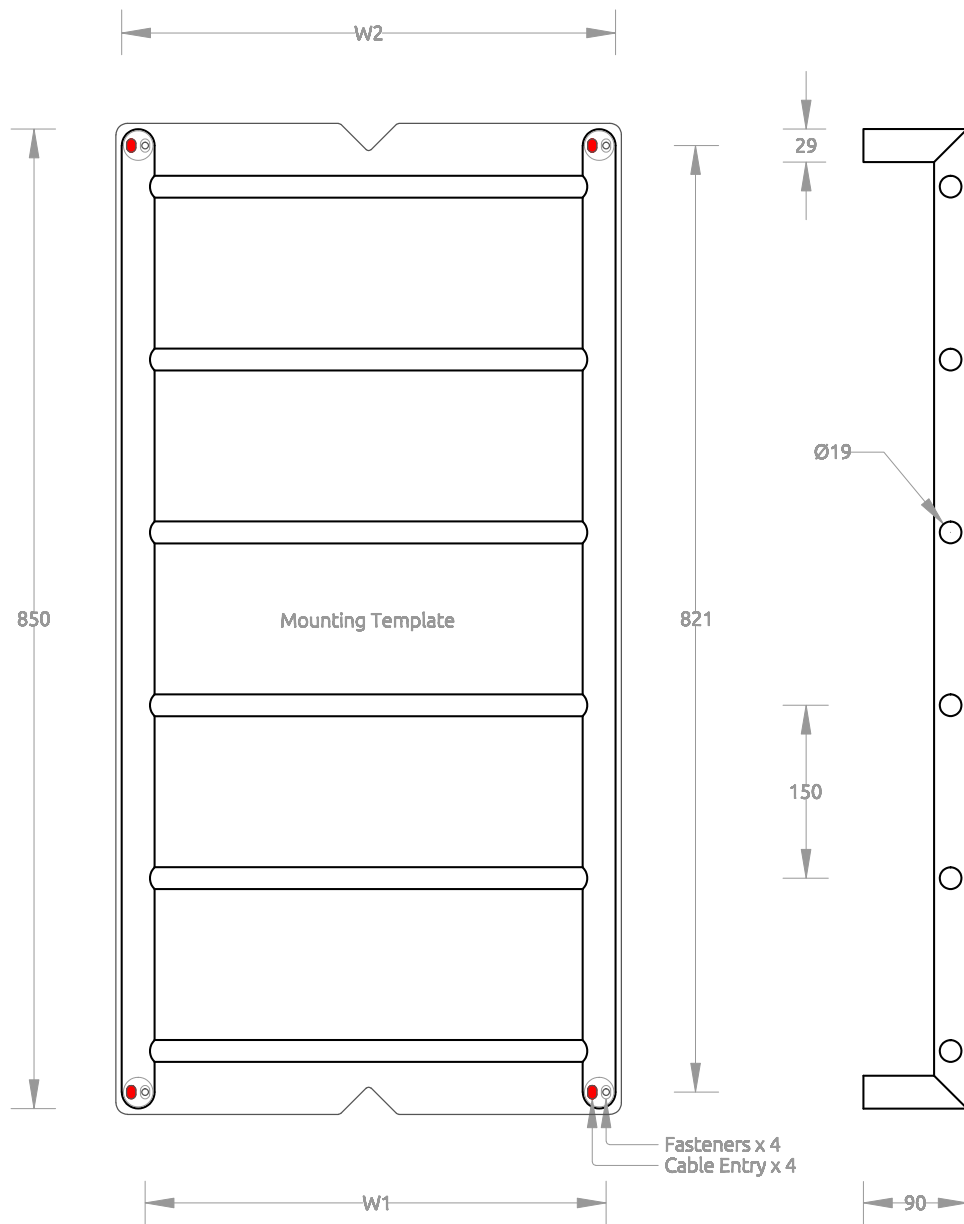

VARIATIONS

Heated Version	Non-Heated Version	W1 (Fixings)	W2 (Overall)
TLH2-85x40	TLN2-85x40	400mm	428mm
TLH2-85x48	TLN2-85x48	480mm	508mm
TLH2-85x60	TLN2-85x60	600mm	628mm
TLH2-85x75	TLN2-85x75	750mm	778mm
TLH2-85x90	TLN2-85x90	900mm	928mm