



Technical Specifications

VERSION 2019.07-001



Curv

Heated & Non-Heated Towel Rails

VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Watts/rail
TRH2-50	TRN2-50	40 x 500 mm	1 to 5	15 Watts
TRH2-77	TRN2-77	40 x 770 mm	1 to 5	23 Watts

NOTES

- This is a Low Voltage product
- Transformer required - TRTR220-24V - Max 6 rails (Sold separately)
- Wire specifications: Use flexible multistrand 1mm² - Do not exceed 5 meters in length.
- Non Heated version available (Less 10%)

STANDARD FINISHES

Mirror Polished Stainless Steel RRP	Brushed Stainless Steel +20% (Stocked)	Matt Black/White Painted +40% (Stocked)	Gunmetal PVD +50% (Stocked)	Brushed Gold PVD +60% (Stocked)
--	---	--	--	--

SPECIFICATIONS

Voltage
24 Volts

Material
Stainless Steel 304

Finish
Mirror Polished

Ingress Protection
IPX5 (Suitable for wet areas)

Standards
AS/NZ 60335.2.43

Electrical Connection
Concealed Wiring only - any leg
(Transformer required)

Heating Method
Dry Internal Heating Element

Non-Heated version available

DEVELOPED IN
AUSTRALIA




HEATING TIME
30 MINUTES



WARRANTY
10 YEAR



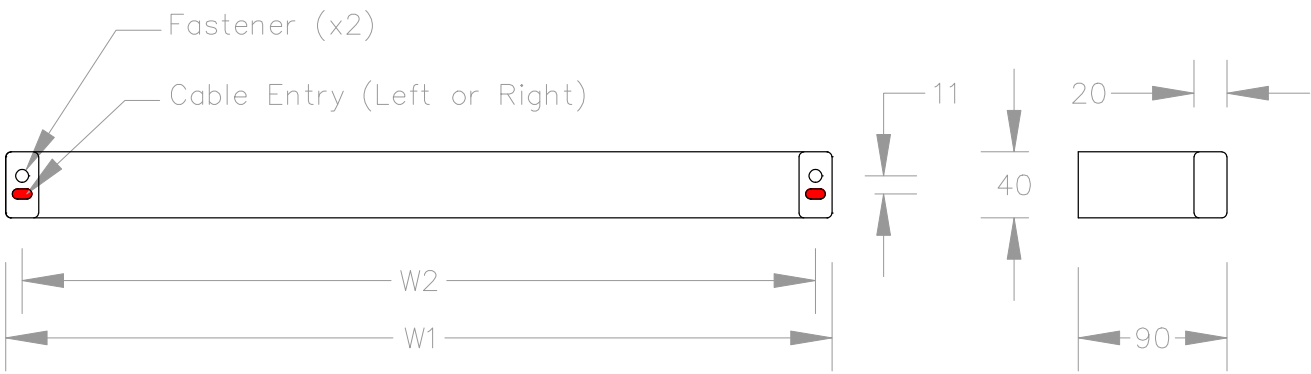

VARIATIONS

Heated Version	Non-Heated Version	H1	W1 (Overall)	W2 (Fixings)
TRH2-50	TRN2-50	40mm	500mm	480mm
TRH2-77	TRN2-77	40mm	770mm	750mm