

## INSTALL INSTRUCTIONS C-VS-1100-F150-2

2017-2020 Ford F-250, 350, 450 XL and XLT Pickup, F-450 and 550 Cab Chassis

2015-2020 Ford F-150 XL and XLT Pickup

2018-2020 Ford Expedition SSV

**Vehicle Specific Console with 11" inches of Equipment mounting space**

*For trucks with 40/20/40 split bench seats or 40/mini console/40 seats*

**\*\* Does not work with 4 X4 floor shifter or higher trim level trucks with full length center console\*\***

### TOOLS REQUIRED:

Ratcheting wrench

Panel removal tool

7 mm Socket or Driver

Metric/Standard Socket Set

T-20 Torx Driver Bit

7/16" Wrench

### INSTALLATION PARTS AND MOUNTING HARDWARE:

<u>QTY</u>	<u>DESCRIPTION</u>	<u>PART#</u>
1	Main console housing	
2	Upper console mounting bracket	CM008699
1	Lower console mounting bracket	CM008729
4	1/4" Serrated nut	GSM30023
4	1/4" Carriage bolt	GSM31999
1	Console upper filler plate	CM008674
2	#8-18 x 1/4" Flat head screw	GSM33178
1	USB extension cable	HW-EL-0044
2	#4 lock washer	HW-LW-1501

CM008699


Upper console  
brackets.  
(One each side)

**C-VS-1100-F150-2  
Assembly drawing**

CM008674  
Filler plate for Model  
XL truck without  
CD player only

Main console housing

CM008729  
Lower console  
bracket

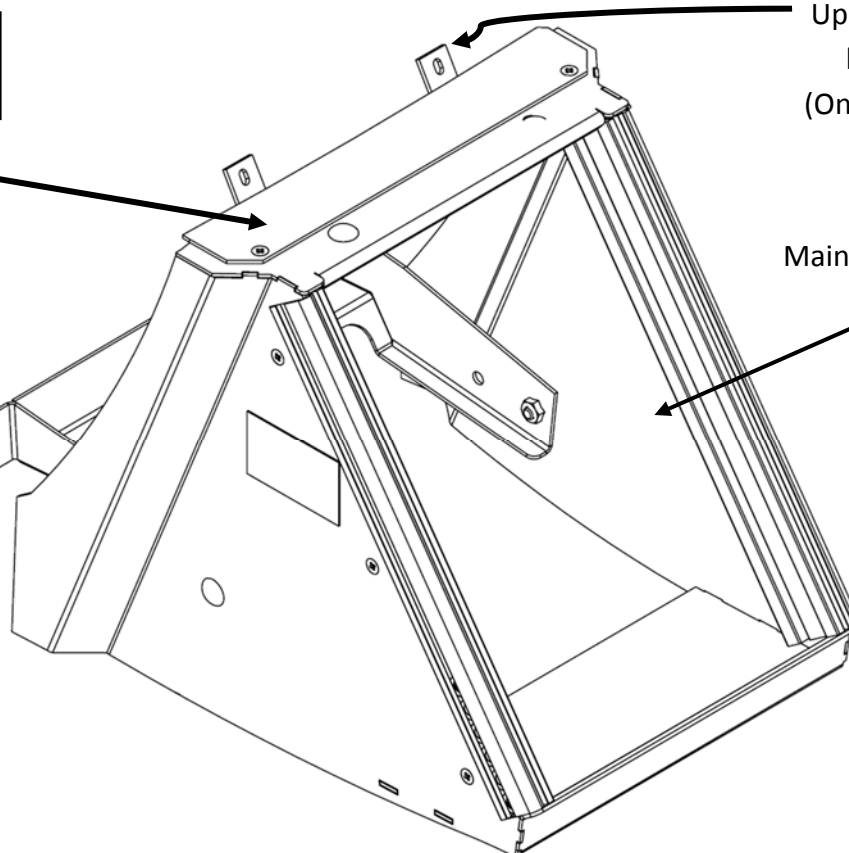

### Always!

- Read all instructions before installing any Havis, Inc. products.
- Use hardware provided with install kit



Model XLT dashboard before installation.

**Note:** Model XLT has optional CD player and model XL does not. CM008674 Filler plate is provided for XL application.



Flip up center seat and remove OEM cup holder.



Gently pry up speaker cover  
***If your vehicle does not have the speaker simply lift the rubber mat to expose the fasteners.***



Remove two (2) 7mm head fasteners located next to the center channel speaker.



Pop up upper storage tray and unplug speaker.



Remove two (2) 7mm head fasteners from top of radio and HVAC controller



Starting at the top, gently pry along the radio and HVAC controller and remove.



Unclip the lower trim panel from the lower portion of the dash. Pull to the side.

***It is not necessary to fully remove this panel.***



Gently pry along the side vent panels around the previously removed trim bezels starting at the top and working your way down.





Remove (2) 7mm head fasteners at the top of the pocket and (2) 10mm head bolts at the bottom sides.



Pull OEM pocket out.  
***This will not be reused.***  
Remove the USB from the pocket and plug in the provided USB extension



Install lower console mounting bracket (CM008729) using previously removed 10mm head bolts.



Install upper console mounting brackets (CM008699) using previously removed 7mm head fasteners.



Re-install all removed trim panels and bezels.



Install console by flipping up the center seat and placing the console as close as possible to the dash and slipping it in front of the center under seat storage.



Install four (4) 1/4" x 1/2" carriage bolts and serrated nuts into the upper and lower support bracket.

***Tighten all hardware.***

***Mount USB extension in passenger side of console.***



Install control heads and equipment.



***For the non CD player models the CM008674 filler plate must be attached using #8 x 1/4" Flat head screws on top of console.***

## Instructions for Havis Remote USB Extension Cable

### Part # HW-EL-0044

Parts Included:

- USB 2.0 Panel Mount Extension Cable - 12" length (1)
- Screws (2)
- Lock Washers (2)

**BEFORE BEGINNING:**

- (A) Ensure that 12.0" cable length is sufficient to span distance from desired USB Port to desired panel mount location.  
(B) Ensure panel mount matches recommended geometry defined to the right.

Installation:

1. Remove the Screws from USB Cable.
2. Align the female end of the USB Cable with mounting surface hole pattern.  
Insert Screws and Lock Washers as shown and tighten Screws. **⚠ CAUTION: DO NOT OVERTIGHTEN SCREWS**
3. Plug male end of USB Cable into USB Port.
4. Strain Relief cable as needed.

