

INSTALLATION INSTRUCTIONS C-VS-1508-INUT 23" Console for 2020 Ford Interceptor Utility

TOOLS REQUIRED:

Phillips Screw Driver Metric Socket Set Standard Socket Set Wire Cutters T-20 Torx Bit Wire Crimping Tool

PARTS and MOUNTING HARDWARE:

<u>QTY</u>	DESCRIPTION	PART#
1	Rear floor mounting bracket	CM009301-1
1	Driver side front mounting bracket	CM010466-DS
1	Passenger side front mounting bracket	CM010466-PS
1	Lower front cross support	CM010464

C-HK-351


17	1/4" Serrated nut	GSM30023
17	1/4" x 3/4" Carriage bolts	GSM32000
3	10-32 Keps nut	GSM30028
3	10-32 x 3/4" Machine screws	GSM33119
4	#8-18 x 1/4" Machine screws	GSM33178

Always!

- ➤ Read all instructions before installing any Havis, Inc. products.
- Check for obstructions (Wires, brake lines, fuel tank, etc.) before drilling any holes!
 - > Use hardware provided with install kit



C-VS-1508-INUT Assembly

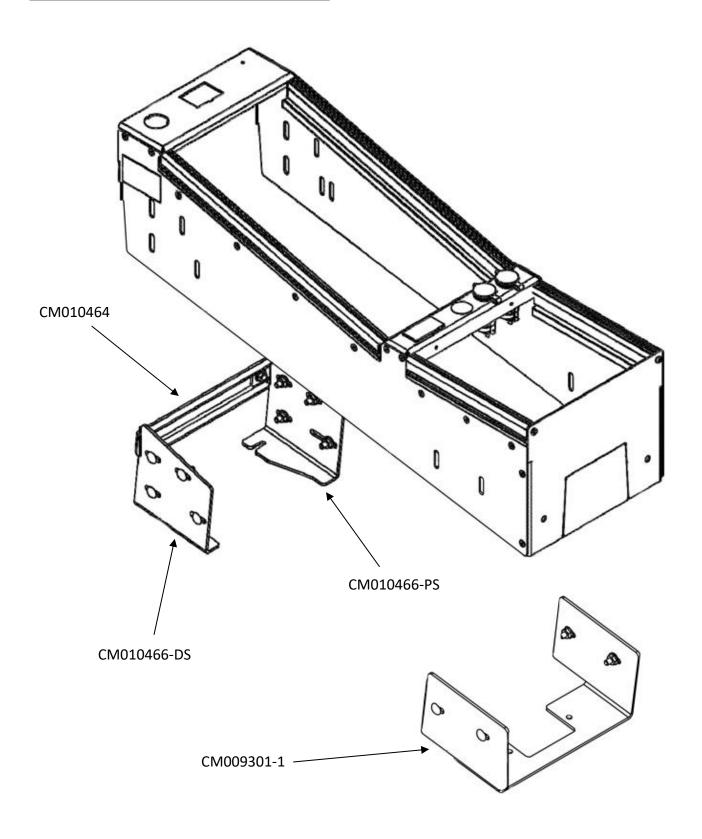





View of Interceptor Utility before install



Remove fasteners on sides of lower trim. (7mm)



Unplug and remove OEM 12 v socket and USB module. Re-install lower trim and OEM fasteners into dash.

Havis, Inc.
75 Jacksonville Road
Warminster, PA 18974
T 800-524-9900 F 215-957-0729



Remove OEM tunnel plate by removing rear nuts.

Front nuts only have to be loosened.

The OEM track is slotted at the front. (10mm socket)



Remove lower dash trim by carefully pulling it towards the rear of the vehicle.




Install OEM 12 v socket and USB retaining bracket into console top forward panel.






Loosen OEM nuts from front ductwork. (10mm socket)
Slide front mounting brackets under ductwork from the sides
onto OEM studs. **Note:** Make sure brackets are below plastic
vent and sitting on top of metal floor.

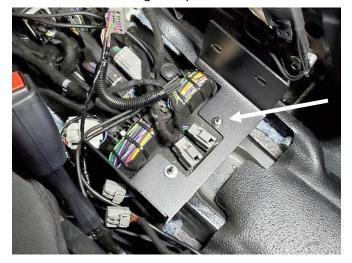

Attach rear mounting bracket to floor studs using previously removed OEM nuts.



Plug wires back into 12 v socket and USB module.
Wire and install equipment as needed

Havis, Inc. 75 Jacksonville Road Warminster, PA 18974 T 800-524-9900 F 215-957-0729



Attach front lower cross support to mount brackets with carriage bolts and serrated nuts.



Slide console housing onto floor brackets and attach with carriage bolts and serrated nuts.

Tighten all hardware.



Installation complete

C-VS-1508-INUT_INST_3-20