

NOTE: This manual is only applicable for ilumex Stick Lights purchased after October 15, 2020.

400: UBL-IL-400

600: UBL-IL-600

600: U

FLASH PATTERNS:

ATTACHING BRACKETS TO THE SLIDING BOLT CHANNEL:

Random - Default

Single - Split

Double - Split

Quad - Split

Quint - Split

Mega - Split

Ultra - Split

Single Quad - Split

Single High/Low - Split

Single - All

Double - All

Quad - All

Quint - All

Mega - All

Ultra - All

Single Quad - All


Single High/Low - All

Steady 2 - All

Steady 4 - All

- 1) Remove nuts from the bolts in the sliding channel
- 2) Place bolts through holes on the mounting bracket
- 3) Replace nuts on each bolt and tighten


CONTROLLER OPERATIONS: (NOT APPLICABLE FOR ILUMEX 200 STICK LIGHT)

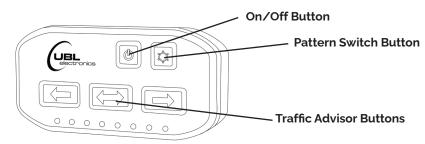

400, 600, 800, 1000 HARDWIRING INSTRUCTIONS:

(PROFESSIONAL INSTALLATION RECOMMENDED)

- 1) Using wire cutters, cut wire just above controller housing, or at desired length.
- 2) Remove black wire cover approximately one inch from end exposing wires.
- 3) Strip wire casing for each wire approximately ½ to ½ inch.
- 4) Follow wiring diagram below:

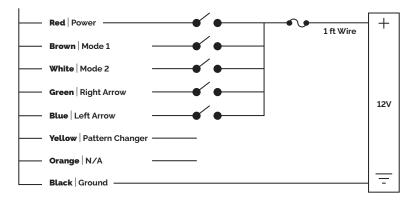


KEY LEGEND	
•	Switch
••	Fuse
÷	Ground
=	

Note: Mode 2 overrides Mode 1

Center Out Arrow: Connect blue and green wires together

200 WIRING DIAGRAM: (PROFESSIONAL INSTALLATION RECOMMENDED)



KEY LEGEND	
•	Switch
••	Fuse
ŀ	Ground



- Do not install this product or route any wires in the deployment area of your airbag. Equipment that is mounted or located in the airbag deployment area can reduce or damage the effectiveness of the airbag, or become a projectile that can cause serious personal injury or death. Refer to your vehicle owner's manual for more information about the airbag deployment area. The User/Installer assumes full responsibility for determining a proper mounting location that provides ultimate safety to all passengers inside the vehicle.
- Do not attempt to activate or control this device in hazardous driving conditions.
- Nighttime operation of lighting products may produce reflected light within the vehicle, rendering it difficult to see. Use with caution.
- These are high intensity lights. Please allow adequate distance before looking directly into them.

IMPORTANT!

Before returning this vehicle to active service, visually confirm the proper operation of this product, as well as all vehicle components/equipment.

WARRANTY INFORMATION

- UBL Electronics warrants that all "ilumex" series LED lights are free from defects in materials and workmanship for five (5) years from the time of purchase, all other LED lights are free from defects in materials and workmanship for two (2) years from the time of purchase, and all UBL sirens and speakers are free from defects in materials and workmanship for one (1) year from the time of purchase. During the warranty period we will, at our sole discretion, repair or replace the product. This limited warranty does not cover labor charges for the removal and installation of the product.
- UBL Electronics is not responsible for incidental damages, including but not limited to: loss of time, loss of work, inconvenience, loss and/or damage to personal property, and shipping expenses.
- Use of incorrect electrical power (other than that specified by the manufacturer), use of inappropriate or inadequate wiring, improper circuit protection or alterations to the product may void the warranty.

THIS WARRANTY IS SUBJECT TO CHANGE WITHOUT NOTICE.