



For warranty information go to www.cigaroasis.com.




79 Heisser Court
Farmingdale, NY 11735
516.520.5258
www.cigaroasis.com



Cigar Oasis...the best in cigar humidification just got better!

DELTA by Cigar Oasis

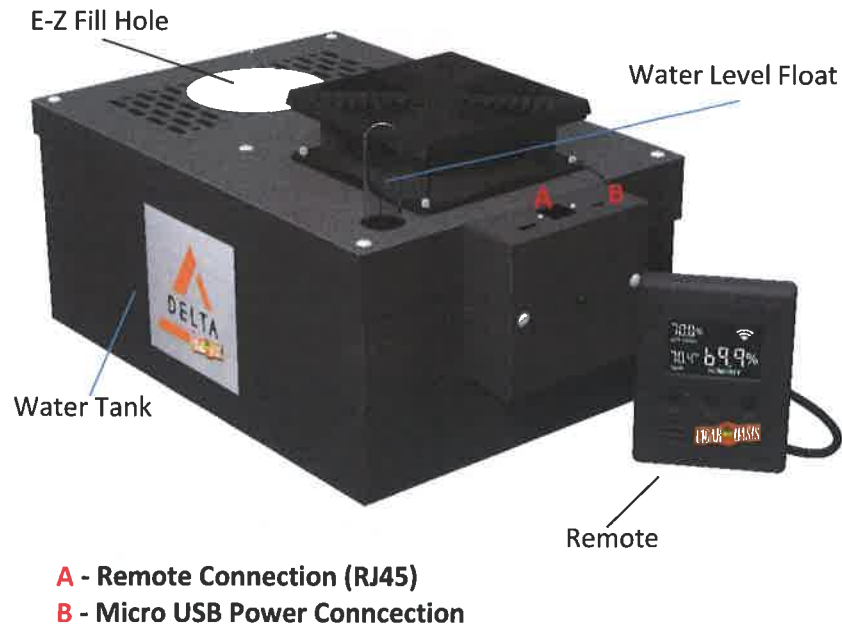

PLACEMENT

It is best to place the Delta with easy access to the E-Z Fill water hole and be sure to leave two inches above the fan for air to travel freely. Keep the back wall of the humidor clear of any boxes to allow air to flow freely and never block or cover the vent.

ASSEMBLY & STARTING YOUR DELTA

1. Remove all contents from the box.
2. Place the Delta in a location in the humidor that is accessible to fill the water tank.
3. Locate the remote inside the cabinet and plug into the unit at location **A**.
4. Fill the Water Tank (See Fill Instructions).
5. Plug the micro USB connector into the Delta unit at location **B** and then plug the adapter into the wall to power up the unit. **Only use the supplied power adapter.**

WATER TANK REFILL INSTRUCTIONS

1. Remove the white plastic cap at the E-Z Fill hole.
2. Pour **distilled** water through the hole into the water tank.
3. Watch the Water Level Float to see when the tank is full.
4. Replace the white plastic cap over the hole in front of the unit.

USING YOUR DELTA

- Once the unit is put together and plugged in, it turns on after a few seconds of powering up and then it will read the current humidity. The unit is factory preset at 70% humidity. As soon as the humidity drops below 70% the fan will come on to add moisture to the humidor.
- To raise or lower the humidity settings use the **UP** or **DOWN** arrows.
- When the unit needs to be refilled with distilled water, the **Low**

Water and **Alert** icons will appear on display.



- When the base is refilled and the unit gets to the setpoint the icons will shut off.

Change Temperature Between Fahrenheit and Celsius

- 1) Hold the **CIRCLE** button until the **F** or **C** start flashing.
- 2) Press the **UP** arrow to select Celsius or Fahrenheit.
- 3) Hold the **CIRCLE** button down until **F** or **C** stop flashing to save the changes.

Calibrate Humidity

- 1) Hold the **CIRCLE** and **UP** arrow until the screen displays **U**.
- 2) Use **UP** and **DOWN** arrows to raise or lower humidity $\pm 9\%$.
- 3) Hold the **CIRCLE** and **UP** arrow to save the changes.

Wi-Fi Access with 30 Day Free Trial

For more information go to:

<https://www.cigaroasis.com/pages/smart-humidor>