


**CalmMax**

Trampoline  
**user manual**



CalmMax

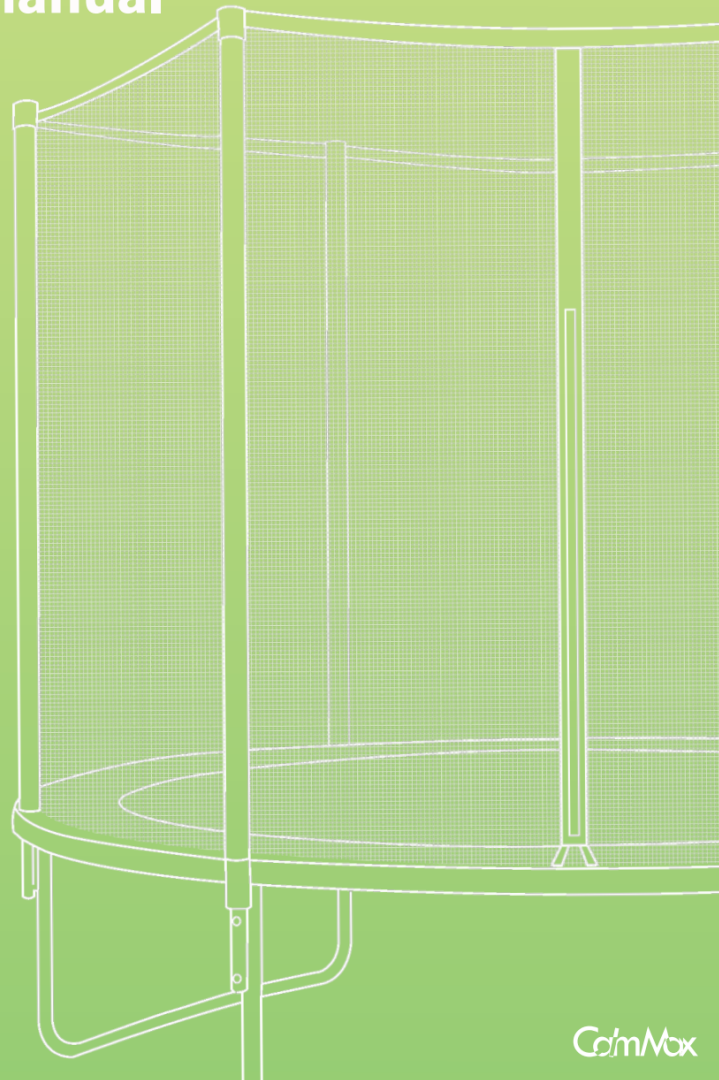

For any enquiries please do not hesitate to get in touch with us at contact  
[cs\\_us@calm-max.net](mailto:cs_us@calm-max.net)

**WARNING!**

Please read these instructions before starting to assemble the trampoline. Incorrect assembling might cause damage to the trampoline.

**ADULT SUPERVISION GUIDANCE REQUIRED AT ALL TIMES.****Recommended age 6+ years.**

- Max user weight limit : **398 lbs**
- Not suitable for children under 36 months-small parts , choking hazard.
- The trampoline must be assembled by an adult in accordance with the assembling instructions.
- The trampoline is intended for outdoor use only.
- Do not use the mat when it is wet.
- Only one user at a time. Danger of Collision hazard.
- Always close the net opening before jumping.
- Jump without shoes.
- Empty pockets and hands before jumping.
- Always jump in the middle of the mat.
- Do not eat while jumping. It is advisable not to bounce immediately after a meal.
- Do not exit by a jump.
- Do not use in strong wind conditions and secure the trampoline.
- Limit the time of continuous usage (make regular stops).

CrimMax


**ADVISORY**

- This trampoline is not intended to be buried in the ground.
- The trampoline must be placed on a level surface at least 2m from any structures or obstructions such as fence, garage, house, overhanging branches, laundry lines or electrical wires.
- Do not install the trampoline over concrete, asphalt or any other hard surface. Also not in proximity of other conflicting installations, such as padding / swimming pools, swings, slides or climbing frames.
- Any modifications made by the consumer to the original trampoline (e.g. the adding of an accessory) shall be carried out according to the instructions of the manufacturer.
- Inspect trampoline / enclosure net before each use.
- If an access ladder is used it should be removed when trampoline is not in use.
- Make sure there are no children / animals / obstructions underneath the trampoline.
- Access the trampoline through the door of the enclosure net only. Making sure you securely close it before bouncing. Use: Ensure the door is securely closed before bouncing.
- Don't intentionally rebound off the enclosure net as this will weaken it.
- Only attach manufacturer approved accessories to the trampoline and enclosure net.
- Always jump in the middle of the mat and practice bounce techniques safely with adult supervision and guidance.

## ASSEMBLY AND MAINTENANCE INSTRUCTIONS

- Attention to the need to carry out checks and maintenance of the main parts (frame, suspension system, mat, padding, and enclosure) at the beginning of each season and also at regular intervals of every 2 weeks, pointing out that if these checks are not carried out, the trampoline could become dangerous.
- Check all nuts and bolts for tightness and tighten when required.
- Check that all spring-loaded (pit pin) joints are still intact and cannot become dislodged during play.
- Check all coverings and sharp edges and replace when required.
- Retain the maintenance instruction manual.
- Outdoor trampolines should be equipped with a device that in strong wind conditions avoid displacement due to wind (e.g. steel bars in the ground or loads like sand bag or water bags) and/or items catching wind like net and mat should be removed.
- In certain countries during winter period, the snow load and the very low temperature can damage the trampoline. It is recommended to remove the snow and store the mat and the enclosure indoor.
- Check that mat, padding, enclosure and soft surface are without defects.
- NOTE: Sunlight, rain, snow and extreme temperatures reduce the strength of these parts over time.
- Make sure that the hook-and-loop fasteners are closed correctly during use of trampoline!
- Trampoline and net should be packed away in winter. Make sure all parts are dry and packed securely. Store dry to support product longevity. Always be aware of wear and tear due to weather and wind.
- We recommend securing the trampoline in strong winds. Tie the trampoline down with ropes attached to the trampoline pad. Tie the trampoline down in a minimum of three places distributed evenly across the trampoline frame.
- Do not secure the legs as these may become misaligned and ruin the trampoline. Dismantle or remove the trampoline completely, if required. It may result in great danger if the trampoline is not secured in strong winds.
- If the trampoline is not used for short periods of time and to avoid jump mat debris caused by fallen leaves and twigs, It's recommended usage of a Weather Cover. When the trampoline is not used for a longer period of time (e.g. during the winter). It's recommended storing the trampoline, especially the protective padding, in a dry area to support product longevity.


GefimBox

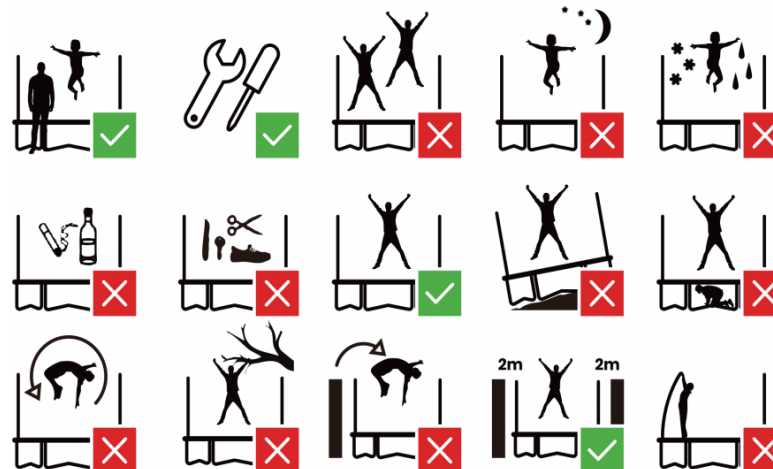

## MOVING INSTRUCTIONS





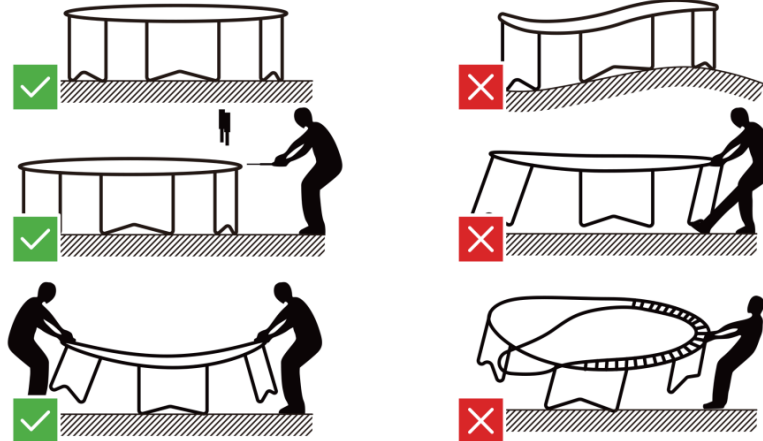















- Make sure the trampoline is placed on level ground. Uneven ground surfaces may cause the trampoline frame to warp.
- Make sure that all bolts holding the frame joints are tightened completely before installing the springs. Failure to do this properly will cause the frame to warp.
- Make sure NOT to use one's leg to push against the trampoline leg or frame when loading the springs. It will cause the trampoline to warp.
- DO NOT load the springs onto the frame on only one side of the trampoline. Uneven distribution of tension from the springs will cause the frame to warp.
- If the trampoline frame warps up, do not be alarmed as the "Quad-lock" system is designed to be flexible. Push down on the part of the frame that warped with two people as shown. The frame will level out.
- Moving trampoline. If the trampoline and enclosure needs to be moved, it should be moved by two persons at least, kept horizontal, and lifted slightly. If necessary, the trampoline and enclosure can be taken for moving. To take the trampoline apart, follow the assembly steps in reverse order.
- If you need to move the trampoline, two people should be used at least. All connector points should be wrapped secured with weather resistant tape, such as duct tape. This will keep the frame intact during the move and prevent the connector points from dislocating and separating. When moving, lift the trampoline slightly of the ground and keep it horizontal to the ground. For any type of other move, you should disassemble the trampoline.

CalmMax

**WARNING!**


2 adults in good physical condition are required for the following assembly. Wear proper shoes and maintain balance to prevent fall. Failure to follow all instructions and warnings exactly may result in serious injury.

For any enquiries please do not hesitate to get in touch with us at [contact\\_cs\\_us@calm-max.net](mailto:contact_cs_us@calm-max.net)

ITEM	PHOTO	PART NAME	6FT	8FT	10FT	12FT	14FT	15FT	16FT
<b>A</b>		Frame Cover	1	1	1	1	1	1	1
<b>B</b>		Jumping Mat	1	1	1	1	1	1	1
<b>C</b>		Frame rail	6	6	6	8	8	10	12
<b>D</b>		T-connector	6	6	6	8	8	10	12
<b>E</b>		Spring	36	48	60	72	88	90	108
<b>F</b>		Leg extension	0	0	6	8	8	10	12
<b>G</b>		W-shaped leg	3	3	3	4	4	5	6
<b>H</b>		Spring tool-hook	1	1	1	2	2	2	2
<b>I</b>		Screw	0	0	6	8	8	10	12
<b>J</b>		Screwdriver	1	1	1	1	1	1	1
<b>K</b>		Bottom tube	6	6	6	8	8	10	12
<b>L</b>		Upper tube	6	6	6	8	8	10	12
<b>M</b>		Long screw A	6	6	6	8	8	10	12
<b>N</b>		Nut	12	12	12	16	16	20	24
<b>O</b>		Plastic pad	12	12	12	16	16	20	24
<b>P</b>		Enclosure net	1	1	1	1	1	1	1
<b>Q</b>		Sleeve	12	12	12	16	16	20	24
<b>R</b>		Wrench	1	1	1	2	2	2	2
<b>S</b>		Screw nut	12	12	12	16	16	20	24
<b>T</b>		Long screw B	6	6	6	8	8	10	12

## STEP 1


1. By attaching two Leg Extension (F) to W-shaped Legs (G) to form a U shape using the screws (I) with the screwdriver (J)  
Repeat this step for all of the 4 legs. (only 10,12,14,15,16ft need Leg extension)

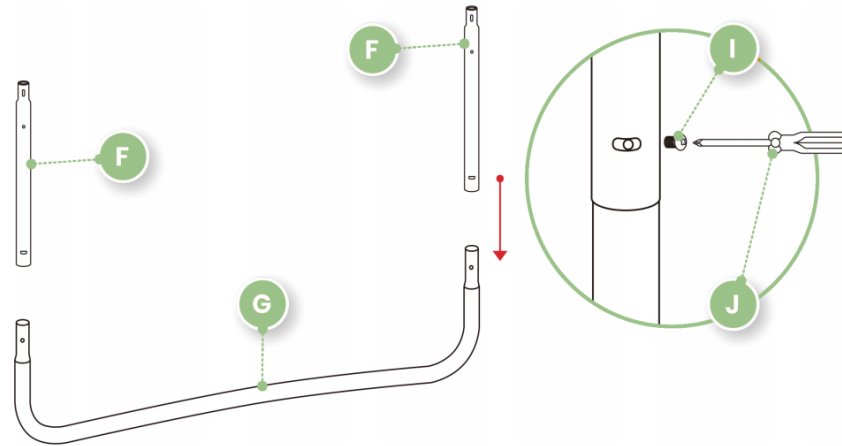


CalmMax

2. Begin by attaching Top Rails (c) to T-connectors (D). Continue until you form a large circle.

**Tip:** Have a second person or use a wall to apply some resistance against the frame to help it shift into place.

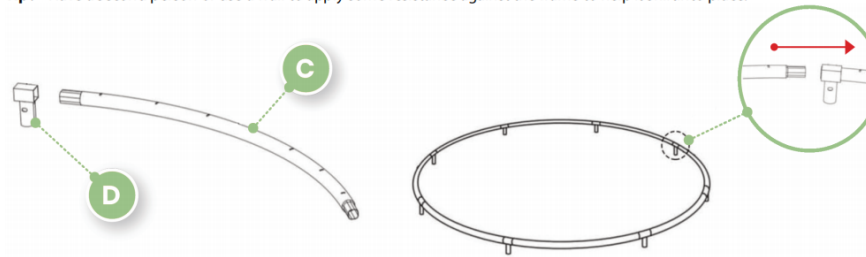


3. Two people will be necessary at this point to assemble the trampoline. One person lifts up the circle frames. The other person lifts the W shaped leg tubes to a standing (vertical) position and inserts the T-connectors into a U shaped leg tubes. Ensure the locking holes are aligned.

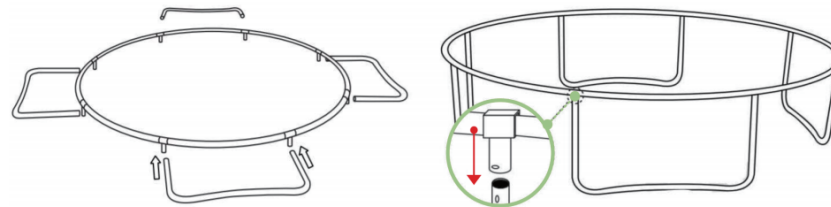


**WARNING!**

2 adults may be required to complete placement of all springs. Springs will create high levels of tension when assembled. Please take care not to pinch your fingers.


4. Lay out the Jumping Mat (B) inside the frame. Ensure the holes are facing inside.

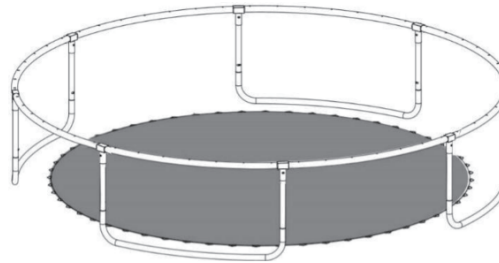

5. Put end 'a' of the spring into trampoline Jumping Mat (B) rings, then take Spring (E) and insert end 'b' into top rail tube.

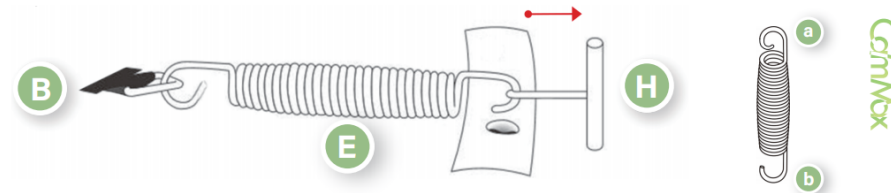

6. Hold Spring Tool (H) overhand and pull spring hook towards Top rail (c) as picture shown: drop hook into frame hole until it latches on completely, tap it down if hook is not completely in the hole.

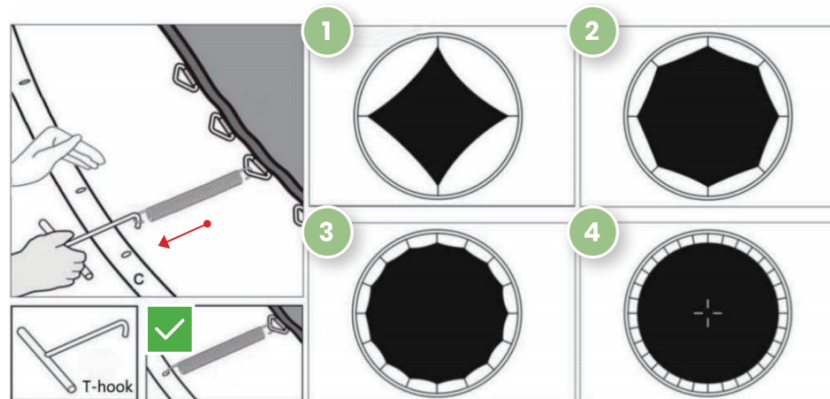






**WARNING!**

Springs must be installed on top rail in this right way around, and fully inserted into the hole on the top of the frame. See the picture below.  
The placement of the next spring must be on the opposite side of frame, then center adjacent, then opposite. It must be done this way so the tension of the spring is spread equality.



For any enquiries please do not hesitate to get in touch with us at [contact\\_cs\\_us@calm-max.net](mailto:contact_cs_us@calm-max.net)

7. Lay out the Jumping Mat (B) inside the frame. Ensure the holes are facing inside.

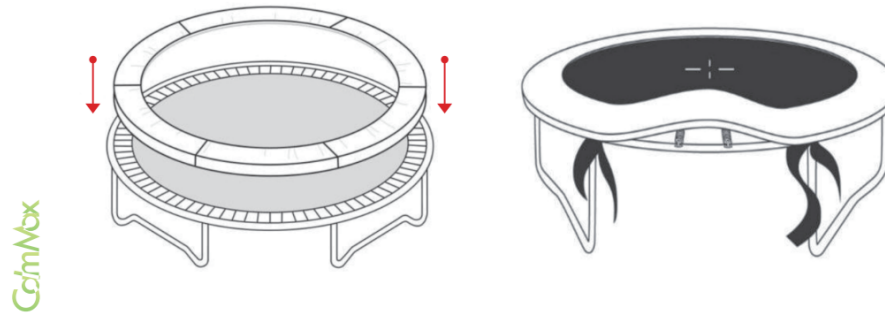


8. Lay Frame Cover (A) on outer edge, so springs are covered. It should be fitted like a shower cap. Please ensure it covers all metal parts.

9. Tie the strap located underneath the frame cover to the frame.




## STEP 1- TRAMPOLINE POLE TUBE ASSEMBLY



1. Firmly fix the Bottom Tube (K) to the leg extension with the Long Screw A (M) & Long Screw B (T), then fasten the fork screw by Spanner (R).

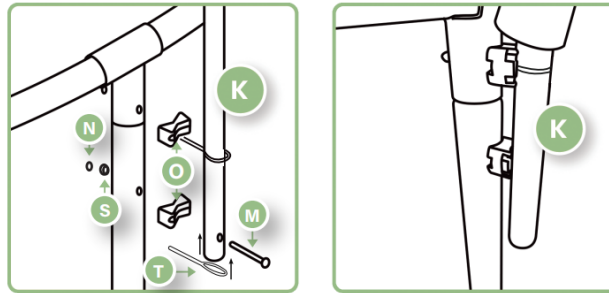



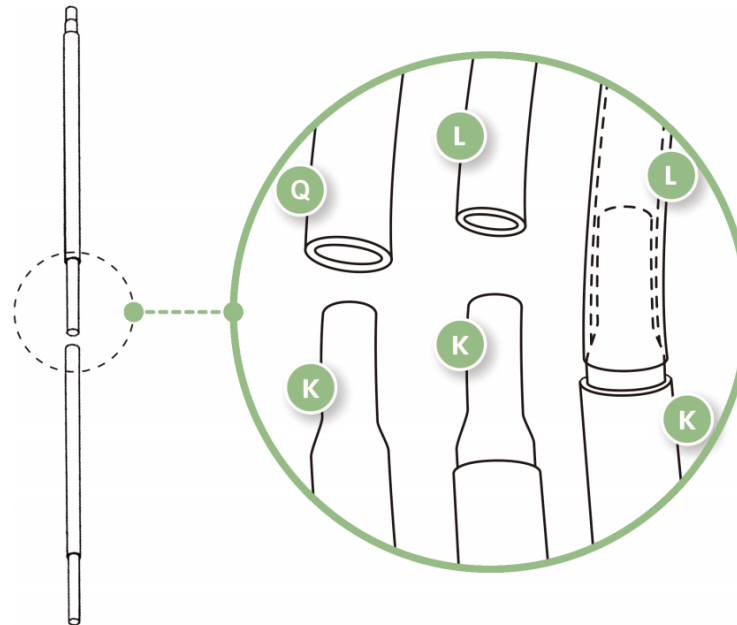

2. Connect the Bottom Tube (k) to the Top Tube (L). **Note:** There are sunken Dots at the end of Top Tubes.

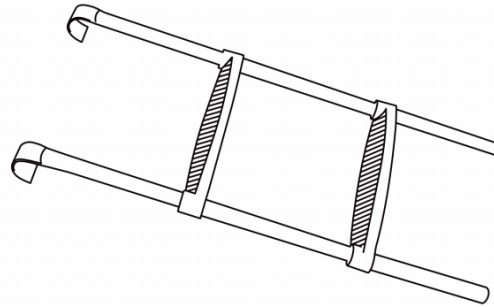

## STEP 2- ATTACH THE LADDER



CalmMax


ITEM	PHOTO	PART NAME	NUMBER
<b>U</b>		Hook	2
<b>V</b>		Foot pedal	2
<b>W</b>		Short screw	4
<b>N</b>		Nut	4

**WARNING!**


Test the steps to make sure they are strong. Find the doorway to your safety net. Lift up your safety pads and place the hooks of the ladder over your trampoline curved pole.

For any enquiries please do not hesitate to get in touch with us at contact [cs\\_us@calm-max.net](mailto:cs_us@calm-max.net)

*YOUR TRAMPOLINE IS READY!*

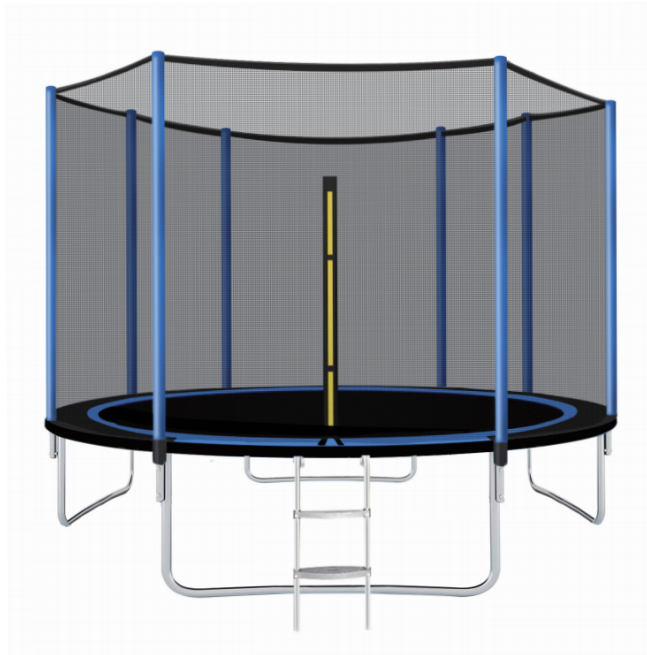

For any enquiries please do not hesitate to get in touch with us at [contact\\_cs\\_us@calm-max.net](mailto:contact_cs_us@calm-max.net)

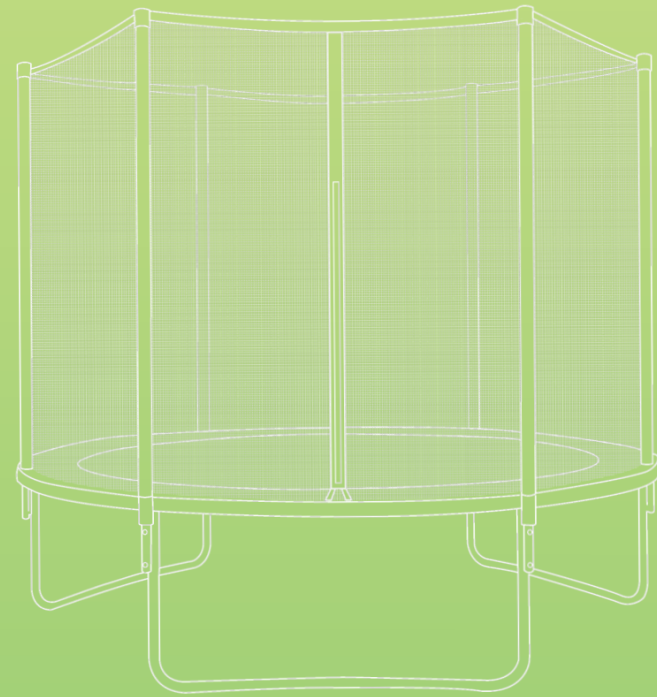

For any enquiries please do not hesitate to get in touch with us at contact  
[cs\\_us@calm-max.net](mailto:cs_us@calm-max.net)

# Thank you!

For any enquiries please do not hesitate to  
get in touch with us at contact

**[cs\\_us@calm-max.net](mailto:cs_us@calm-max.net)**