

CALI[®] vinyl windansea

(formerly mutestep)


Shore to Floor Style



CALI Vinyl Windansea: Cantina Oak

CALI Vinyl Windansea delivers authentic hardwood beauty with attached acoustic padding lining each plank. This IXPE cushion improves sound insulation and provides for quieter steps and more comfortable rooms. Eighteen coastal-inspired colors showcase intricate wood imagery and specialized embossing that matches up with the knots and grains you see. Planks are 100% waterproof and geared for commercial grade durability with a strengthening limestone composite core. Plus, an extra-thick 20mil wear layer boosts scratch protection from all the pets, kids, and party-people in your life.

Available Colors

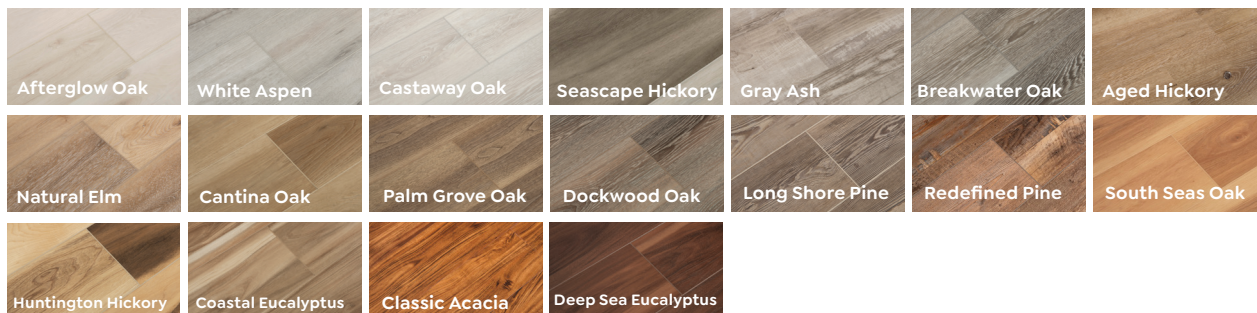



CALI Vinyl Windansea: Seascape Hickory

A World of Good at Your Feet

FloorScore certified and backed by a 50-year residential warranty, Cali Vinyl is made without toxic chemicals, making it safe for homes, hospitals, children, and pets.

Made for the Soak Zone

100% waterproof planks are exactly that, meaning Cali Vinyl can be installed in every room including kitchens, bathrooms, and basements. This also makes for easy cleaning!

Bad to the Bone

Each plank is strengthened by a backbone of limestone composite. This stabilizing core resists indentation and delivers 50% better dimensional stability (less expansion and contraction), requiring no acclimation or transition pieces.

Construction	100% Waterproof GeoCore® (SPC Composite) with attached IXPE Underlayment
Milling	Click-Lock
Grain	Embossed in Register (EIR)
Plank Length	48"
Plank Width	7-1/4"
Plank Thickness	6.5mm
Attached Pad	1.5mm IXPE
Wear Layer	20 mil. / 0.5mm
Sqft./Box	24.03 sqft.
Install Type	Float, Glue
Residential Warranty	50 Year
Commercial Warranty	15 Year
LEED Points	EQC4.3
Indoor Air Quality	Low Emitting VOC & Prop 65 Compliant (VOC and Phthalate Test Results Available Upon Request)
Certification	FloorScore® Certified
Sound Ratings	With Cali Complete: STC 61 & IIC 63 Without Underlayment: STC 61 & IIC 64
Application	Residential, Commercial
Radiant Heat Compatible	Yes (up to 85°F)
Static Coefficient of Friction (ASTM D2047)	Dry: 0.60
Light Resistance (ASTM F1515)	Pass
Heat Resistance (ASTM F1514)	Pass
Chemical Resistance (ASTM F925)	Pass
Residual Indentation (ASTM F1914)	Pass
Fire Rating	Class 1

For the most up-to-date specification information, please visit www.CALIfloors.com



easy-to-clean



easy installation



pet-friendly



waterproof