




7240 Hawthorne

	US Units	Metric Units
Style Number	3038V	
Construction	SPC	
Profile	Fold-N-Tap	
Size	7" x 48"	17.78 cm x 121.92 cm
Overall Thickness	0.236"	6 mm
Wear Layer Thickness	20 mil (0.02")	0.5 mm
Attached Underlayment	EVA Pad	
Attached Underlayment Thickness	0.039"	1 mm
Finish	ScuffResist	
Edge Description	Pressed Bevel	
Area per Carton	16.97 sq ft	1.58 sq m
Area per Pallet	1272.75 sq ft	118.24 sq m
Installation	Floating or Glue	
Installation Grade	Above, On, Below	
Ortho-Phthalates Free	Yes	
FloorScore Certified	Yes	
Residential Warranty	Lifetime Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof	
Commercial Warranty	10 Year Light Commercial	
Smoke Density (ASTM E662, Flaming Mode)	Passes, <450	
Radiant Panel (ASTM E648)	Passes, Class I	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.


Colors

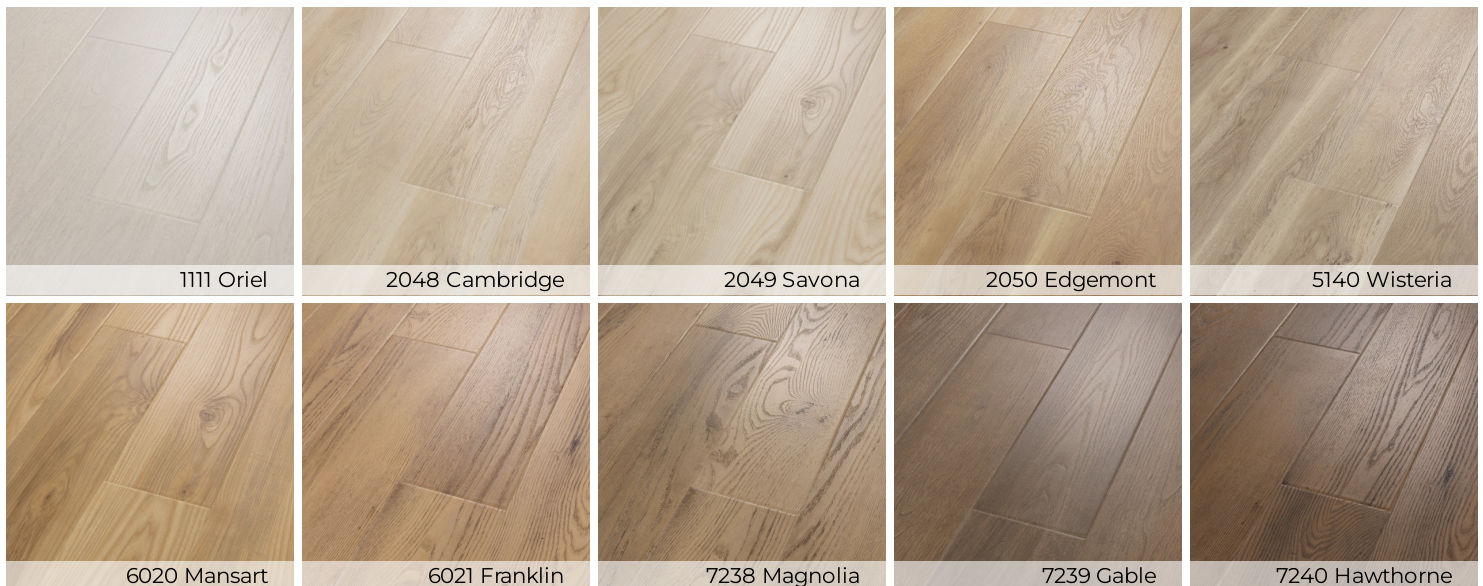

Suggested Adhesive

Style Name	Style Number
Shaw T-180	101LV
Shaw T-180 1 Gal	104LV

Coordinating Trim



Baby Threshold*

BT3HS | 94"



T-Molding*

TM3HS | 94"



Multi-Purpose Reducer

RD3HS | 94"



Quarter Round

QTRHS | 94"



Flush Stairnose


FS5HS | 94"

*Packaged with molding track


Coordinating Metal Trim



Reducer



T-Mold



Stair Cap

Finish

Satin Silver

134SA

137SA

131SA

Satin Nickel

135SA

138SA

132SA

Dark Bronze

136SA

139SA

133SA

Installation Range

Profile Size

Installation Range

3.5mm

1.5mm to 3.5mm heights

5.5mm

3.6mm to 5.5mm heights

8mm

6mm to 8mm heights

Coordinating Stair Treads



Stair Tread TR1HS

White Riser LVWRI*

*packages of 3

