

Product Specifications

Style Number	HI618	
Construction	Solid Polymer Core	
Class / ASTM F3261	Class 1, Type B, Grade 1, Backing Class B	
Edge Profile	Micro Bevel	
Nominal Dimensions	7" wide, 48" long	
	US Units	Metric Units
Actual Product Width	7.17"	18.21 cm
Actual Product Length	48.03"	121.99 cm
Wear Layer Thickness	20 mil (0.02")	0.5 mm
Overall Product Thickness	0.196"	5 mm
Attached Underlayment	Attached Cork	
Underlayment Thickness	0.039"	1 mm
Finish	UV Acrylic	
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	


Packaging

Area per Box	28.68 sq ft	2.664 sq m
Pieces per Box	12 pcs	
Area per Pallet	1290.60 sf	
Boxes per Pallet	45 boxes	



751CS Sandy Beech

Colors

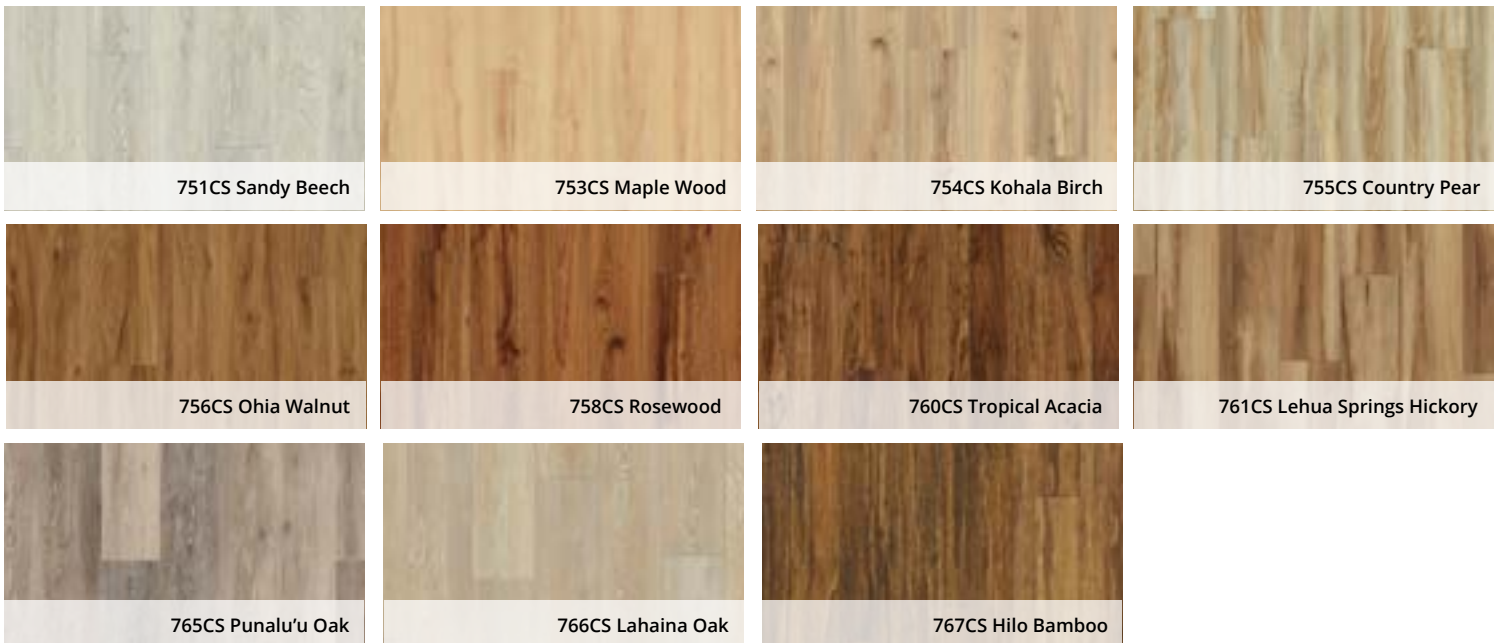

751CS Sandy Beech

753CS Maple Wood

754CS Kohala Birch

755CS Country Pear

756CS Ohia Walnut

758CS Rosewood

760CS Tropical Acacia

761CS Lehua Springs Hickory

765CS Punalu'u Oak

766CS Lahaina Oak

767CS Hilo Bamboo



Pacifica Pro 7"

Test Data

Test data/performance, certifications, and environmental statement found on COREtec Pro Plus spec sheet.

Static Load (ASTM F970)	Passes
Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Smoke Density (ASTM E662)	Passes
Radiant Panel (ASTM E648)	Passes, Class I

Coordinating Trims (all trims are 94" in length)

Quarter Round	T-Molding	Baby Threshold	Reducer	Flush Stairnose
01V46	02V62	01V20	01V70	02V17

Suggested Adhesive

Shaw 200, Shaw 1500, Shaw 4100

Warranties

"USF Lifetime Limited: Residential, Structural, Waterproof, Petproof"

Certifications

GreenGuard (Certification, Gold, Private Label) Certified