



Product name

Universal 2-jaw puller with adjustable reach

For removing bearings, gears, discs, etc.

Art. No. 20-5

Series 20

EAN 4021176009846



	Technical attribute	Metric	Imperial
	Spread	105 - 750 mm	4 1/8 - 29 1/2 inch
	Depth	400 - 700 mm	15 3/4 - 27 5/8 inch
	Spread used internal	340 - 1000 mm	13 3/8 - 40 inch
	Hexagon drive (male)	41 mm	
	Maximum torque	650 Nm	479.5 ft lb
	Maximum load	15,0 t	16.5 US t
	Number of jaws	2	2
	Weight	47 kg	
	Space below	20 mm	3/4 inch
	Space next to it	67 mm	2 5/8 inch



Technologies



GLIDE & FIX

The improved geometry guarantees quick and easy movement of the jaws on the cross-beam.



ARMLOCK

The cross-legged jaws guarantee maximum stability for suspending the jaws in the slider.



SWITCH

A two-sided spindle tip provides optimal adjustment of the spindle to the shaft.







Spare part

Art. No.	Product name
637600	Mechanical pressure spindle.
5-SP-P	2 pulling jaws with adjustable length (pair)
20-5-T	2-jaw cross bar

Accessories

Art. No.	Product name
8-2-M	Long hydraulic spindle
9-1	Auxiliary hydraulic ram
9-2	Auxiliary hydraulic ram
9-3	Auxiliary hydraulic ram
5-SP-E	Jaws, individual

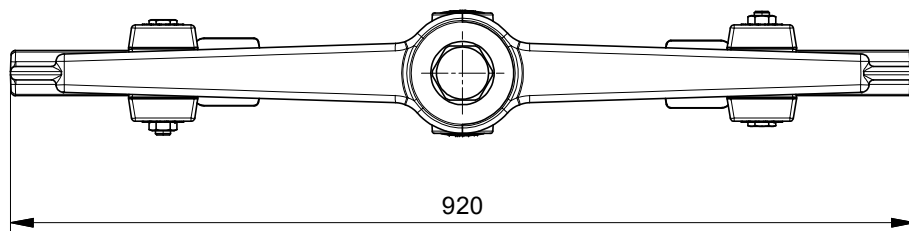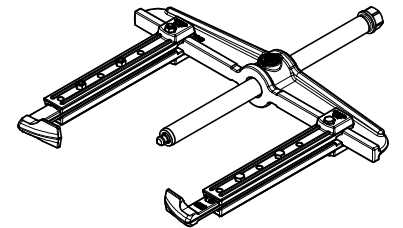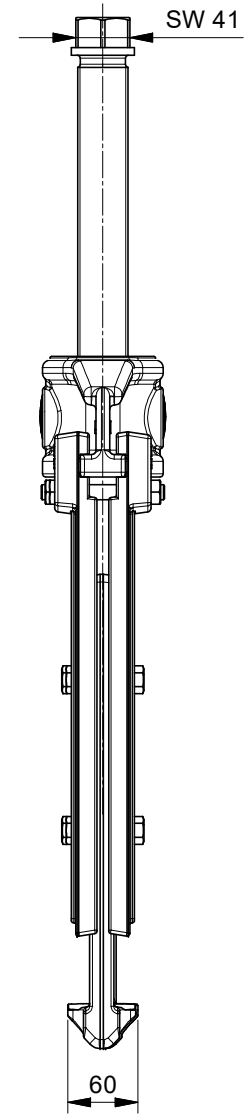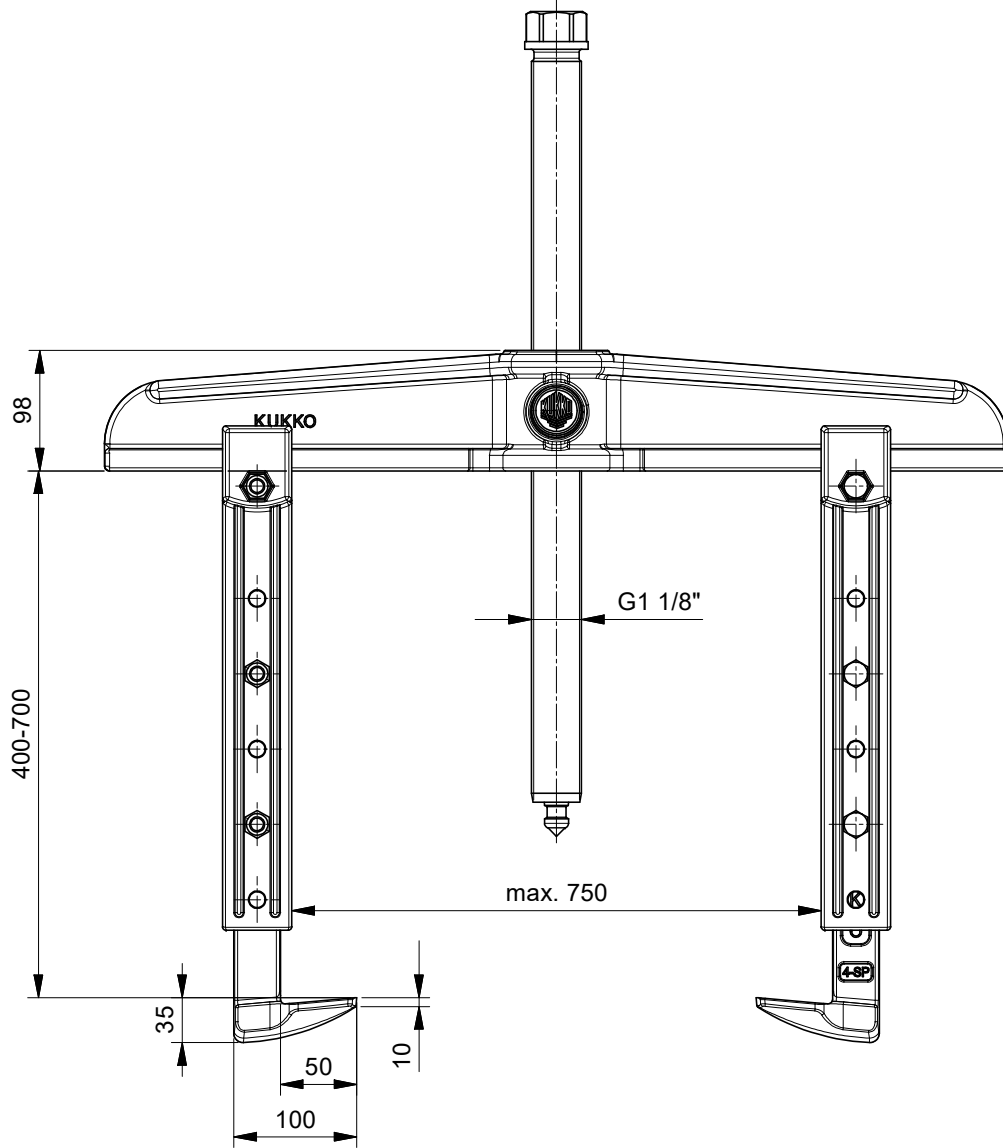

 Kleinbongartz & Kaiser oHG Werkzeugfabrik Hilden - Germany	Dokumentname: 20-5_2-armiger Universal Abzieher	Toleranz: DIN ISO 2768-m
	Dokumentbeschreibung: Baugruppe	Material: Hoch legierter Werkzeugstahl / High alloy tool steel
Erstellt von: Breidenbach	Erstellungsdatum: 06/12/2018	Maßstab: 1:2.5
Teilbeschreibung: 2-armiger Universal Abzieher mit verstellbarer Spannweite / Universal 2-jaw puller with adjustable reach		Wärmebehandlung / Härte: vergüteter Stahl / tempered steel
Artikelnummer / ZNR.: 20-5		Oberflächenbehandlung: -
Dokumentversion: -	Schutzvermerk ISO 16616 beachten	