



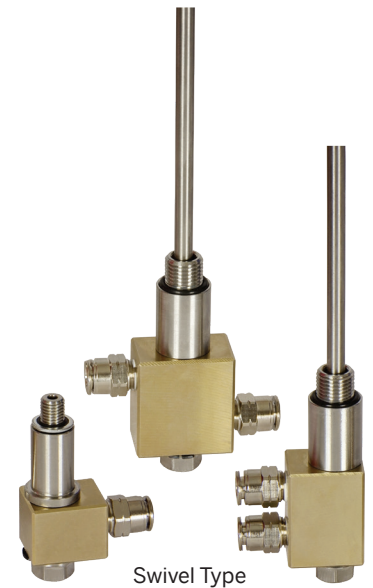

MODULIFTER™ COOLING CASCADES

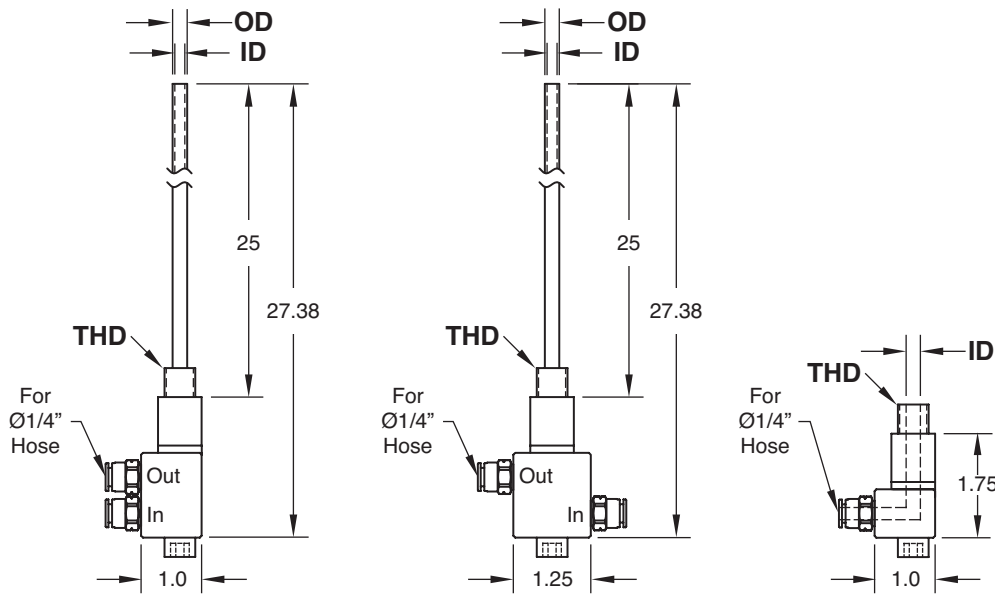


M C86300 and Stainless Steel. Fittings: Nickel Plated Brass.

Parallel (In & Out)			Series (In & Out)			Single (In Only)		THD	MAX TORQUE	NOMINAL ROD DIAMETER Ø
OD	ID	CATALOG NUMBER	OD	ID	CATALOG NUMBER	ID	CATALOG NUMBER			
.157	.12	MLCP16L25	.157	.12	MLCS16L25	.12	MLC12	5/16-24	75 in-lbs	5/8, 3/4
.236	.20	MLCP23L25	.236	.20	MLCS23L25	.20	MLC20	1/2-20	20 ft-lbs	1, 1-1/4, 1-1/2

Note: Straight Fittings included with Cooling Cascades.

PUSH-TO-CONNECT HOSE FITTINGS

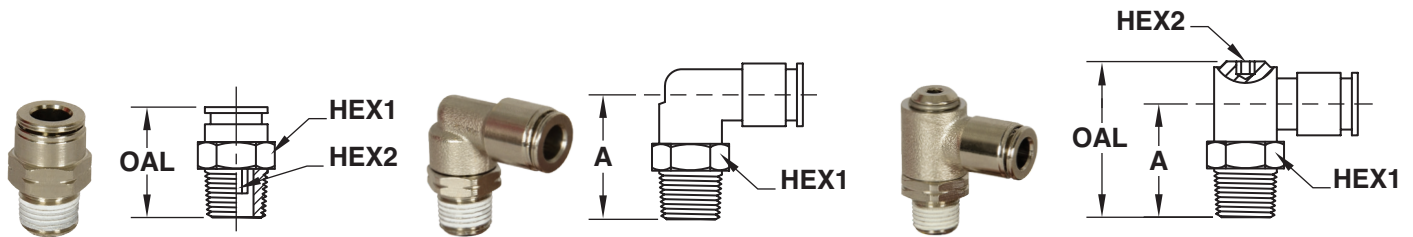

FITTING TYPE	CATALOG NUMBER	HOSE OD	THD (NPT)	HEX1	HEX2	A	OAL
Straight	MLFS25	1/4	1/8	1/2	5/32	—	.87
Elbow	MLFE25	1/4	1/8	1/2	—	.83	—
Banjo	MLFB25	1/4	1/8	9/16	1/8	.81	1.22


M Nickel Plated Brass with Sealant

Note: Maximum Operating Temperature 160° F.

PUSH-TO-CONNECT SPIRAL AND STRAIGHT HOSES

M Polyurethane

CATALOG NUMBER	HOSE OD	HOSE ID	TURNS	OAL	L	B	D
MLH25-5	1/4	5/32	5	10.5 in	2.5	4	1.5
MLH25-10	1/4	5/32	10	13.0 in	5.0	4	1.5
MLH25-25	1/4	5/32	Straight	25.0 ft	—	—	—

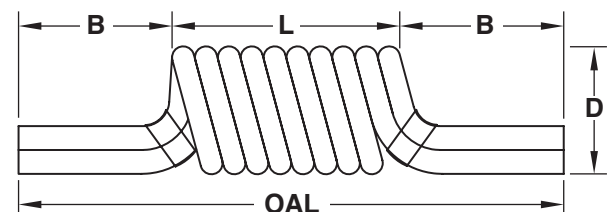

Note: Maximum Operating Temperature 160° F.