




RECESSED CONNECTORS

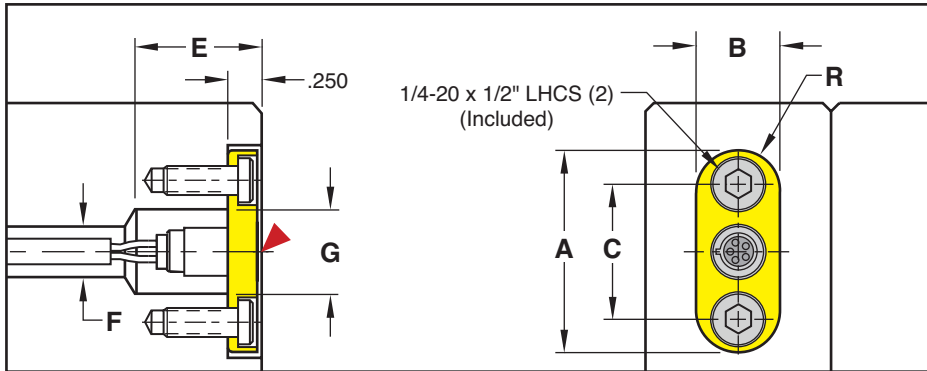


▶ CAD insertion point

CATALOG NUMBER	Color	Function	Pin Outs	A	B	C	R	E	F Diameter	G Diameter
ECRC-1	Red	Hot Sprue	5	2.000	1.00	1.500	.375	1.312	.500	1.00
ECRC-2	Yellow	Cav. Press	5	2.000	.875	1.500	.375	1.187	.375	.875
ECRC-3	Gray	Enable Switch	3	1.500	.625	1.000	.312	.937	.375	.625
ECRC-4	Black	Core In	3	1.500	.625	1.000	.312	.937	.375	.625
ECRC-5	White	Core Out	3	1.500	.625	1.000	.312	.937	.375	.625
ECRC-6	Green	Ejector Switch	4	1.500	.625	1.000	.312	.937	.375	.625
ECRC-7	Orange	Stationary T/C	2	1.500	.625	1.000	.312	.937	.375	.625
ECRC-8	Blue	Movable T/C	2	1.500	.625	1.000	.312	.937	.375	.625

Note: As a safety precaution, the ECRC-1 for the Hot Sprues include a male plug, which is compatible with the ECCA-1-20SF female ended patch cable. Hot Sprue Bushings are sold on page K-8.

Crimp-style bullet snap connectors included.

WIRE CHANNEL INSERTS

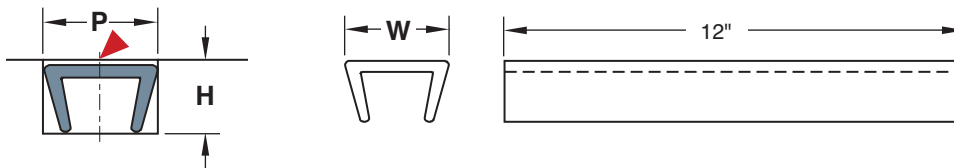

M Nylon ▶ CAD insertion point

CATALOG NUMBER	P Pocket Width	H Pocket Depth	W Wire Channel Width
WC-50	.550	.500	.564 ±.01
WC-100	1.000	.688	1.021 ±.02

Maximum mold temperature: 450° F (230° C)