


# MAC FAUCETS Deck Mount Rough-in

Faucets: FA400-101, 102, 103, 106, 109, 118, 1100, 1200, 1400, FA4316, FA444-17, 22, 31, 63  
 Soap Dispensers: PYOS-101, 109, 1100, 1200, 1400, PYOS-17, 22, 60


Page 1 of 2

- Rough-in showing faucet hole in solid counter tops. Other holes are optional.
- Round or oval sinks. For square sinks see page 2.
- Faucet hole diameter may not exceed 2"
- All dimensions in inches.

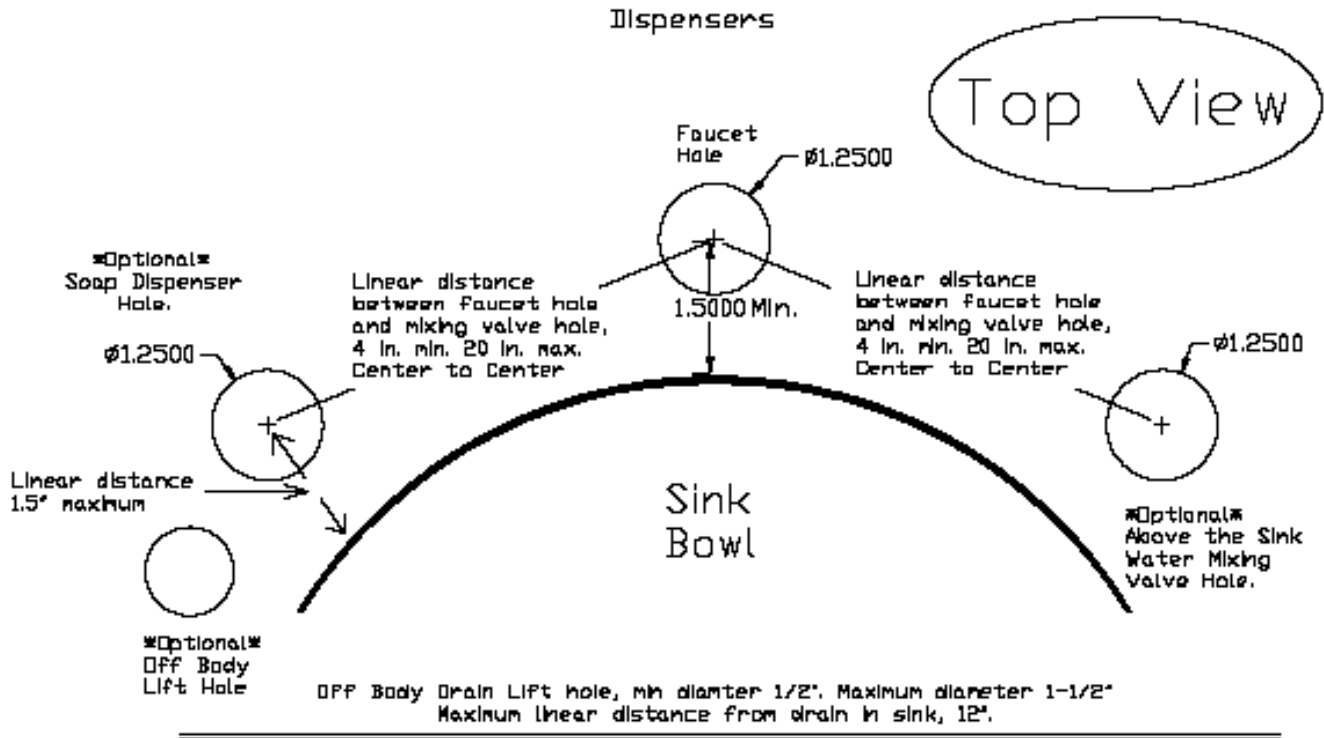

## WARNING

Drop in sink may interfere with sensor. We recommend undermount sink or sink that is flush with counter top.



## Side View

**Recommended Counter Thickness.**

**If Thicker, Please Call -MAC FAUCETS for Verification.**

**1/16" Minimum**

1/16" minimum


Faucet Hole

# MAC FAUCETS Deck Mount Rough-in

Faucets: FA400-101, 102, 103, 106, 109, 118, 1100, 1200, 1400, FA4316, FA444-17, 22, 31, 63  
 Soap Dispensers: PYOS-101, 109, 1100, 1200, 1400, PYOS-17, 22, 60

## Page 2 of 2

- Rough-in showing faucet hole in solid counter tops. Other holes are optional.
- Square sinks. For round or oval sinks see page 1.
- Faucet hole diameter may not exceed 2"
- All dimensions in inches.

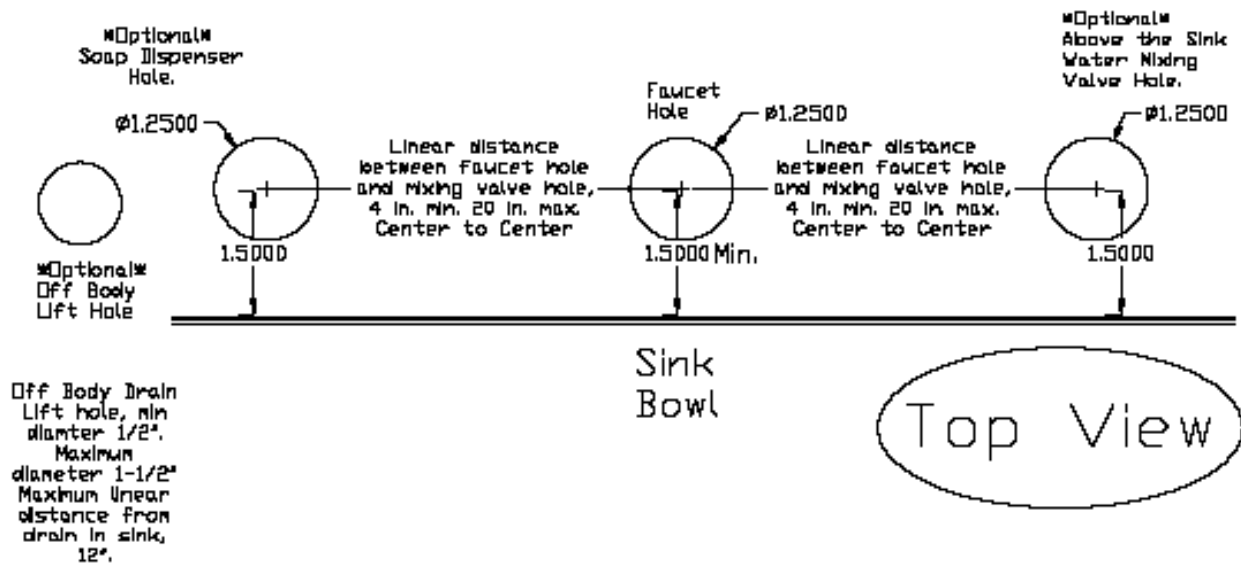


Off Body Drain Lift hole, min diameter 1/2". Maximum diameter 1-1/2". Maximum linear distance from drain in sink, 12".

### WARNING


Drop in sink may interfere with sensor. We recommend undermount sink or sink that is flush with counter top.

Sink Bowl



Counter Top

### Side View



Faucet Hole

Recommended counter thickness. If thicker, please call MAC Faucets for verification... 1/16" minimum

MAC FAUCETS

[www.macfaucets.com](http://www.macfaucets.com) Tel 866 558 3200 Fax 310 919 3073 Email [Info@macfaucets.com](mailto:Info@macfaucets.com)