MAC FAUCETS

The Leader in Decorative Automatic Faucets Worldwide



Package Includes

Faucet

Solenoid Valve

Please Note: Faucet Sold Without Drain

Stainless Steel Hose

Mounting Hardware

Batteries Pre-installed

All the hardware necessary for satisfactory installation



ANSI A112.18.1M

CSA Standard B125, 1.5 U.S. GPM

NSF/ANSI/CAN61-2022 Certified



DESIGNED

U.S.A.

Featuring:

- Solid Brass Faucet.
- Lead-Free Construction
- Matching Electronic Soap Dispenser
- Digital Plug and Play System.
- Resin Encased Control Electronics.
- Battery powered, A/C Option.
- Visible Low Battery Indicator.
- ADA Compliant
- Vandal Resistant

ASSEMBLED IN Optional Equipment:

Lavatory Drain, Grid and Pop-Up Type

Deck Plate for 4" and 8" Center Sinks

Adjustable Under the Sink Mixing Valve

Matching Soap Dispenser

Matching Hole Cap Cover


AC Adapters

The model FA-3260 is ideal for decorative commercial and industrial applications. This unique faucet is rated **HEAVY DUTY** and, employs plug-and-play digital electronics, a hermetically sealed sensor capsule with a visible low battery indicator, as well as one of the most reliable solenoid valves of any electronic faucet.

SPECIFICATIONS AND DIMENSIONS

Model:	FA-3260
SPOUT:	LEAD-FREE SOLID BRASS
Power:	4 (AA) ALKALINE BATTERIES OR AC ADAPTER
BATTERY LIFE EXPECTANCY:	300,000 CYCLES
SOLENDID VALVE:	6 VOLT MAGNET LATCHING
WORKING WATER PRESSURE:	1 PSI -100 PSI
SUPPLY INLET SIZE:	1/2" NPT MALE
WATER TEMPERATURE CONTROL:	None
POP-UP DRAIN ROD:	None
ELECTRONIC SOAP DISPENSER	OPTIONAL: WE RECOMMEND PYOS-3200
	ELECTRONIC SOAP DISPENSER
SENSOR MICROPROCESSOR:	DIGITAL, PLUG, AND PLAY
SENSING RANGE:	2" то 6"
RESPONSE TIME:	O.6 SECOND
SHUT-OFF DELAY TIME:	3 SECOND
MAXIMUM RUNNING TIME:	30 Seconds
PARTICLE FILTER SIZE:	50 Mesh
AERATOR:	1.5 GPM. OPTIONAL O.5 GPM


All Dimensions in Inches

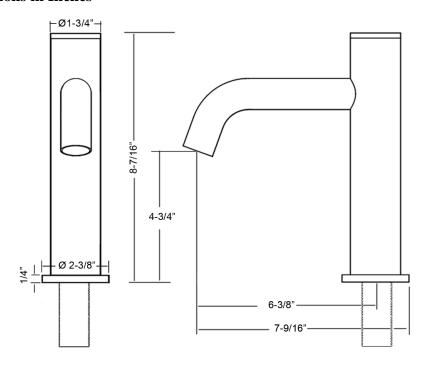

Rough-in

Countertop Thickness: Up to 2-1/2"

Available: Extra Long Shanks for Thicker Countertops Please call before ordering

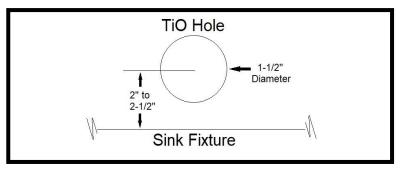

MAC FAUCETS, LLC