

OTC Quality Products



Package Includes

Faucet

Solenoid Valve

Stainless Steel Hose

Mounting Hardware

Battery Case

Batteries Pre-installed

Drain Sold Separately

*All the hardware necessary
for satisfactory installation*

Model: OTC200 Electronic Faucet

- **Solid Stainless Steel Construction.**
- **Matching Electronic Faucet.**
- **Digital Plug and Play System.**
- **Lead Free Construction.**
- **ADA Compliant.**
- **Vandal Resistant.**
- **Battery Powered, A/C Option.**
- **Polished Chrome or *Natural* Stainless Steel Finish.**



SPOUT & HARDWARE:	304 STAINLESS STEEL
POWER:	AA BATTERIES/ OPTIONAL AC ADAPTER
BATTERY LIFE EXPECTANCY:	300,000 CYCLES
WORKING WATER PRESSURE:	1 PSI -100 PSI
SUPPLY INLET SIZE:	1/2" NPT MALE
TEMPERATURE CONTROL:	OPTIONAL
SINK DRAIN:	OPTIONAL
RESPONSE TIME:	0.3 SECOND
MAXIMUM RUNNING TIME:	30 SECONDS
AERATOR:	1.5 GPM. MANY FLOW RATES OPTIONS
COUNTER TOP SPECS.:	HOLE SIZE: MIN 1".. THICKNESS: MAX 2"

OTC Quality Products

www.otcquality.com Tel 866 558 3200 Email Info@otcquality.com


MASTER OPTIONS LIST

Instructions: Choose option below. add to the model numbers after a dash (-).

For example: **OTC200-ADT** = faucet + plugin A/C adapter + 4" deck plate + Thermostatic mixing valve. **OTC200-EJF4** = faucet + 8" deck plate + Drain with overflow + 0.5GPM aerator.

Description	Part number	Use Code
A/C adapter. Model number depends on item.	A-19000	A
Battery compartment, D cell, large capacity	A-19500	B
4" On center deck plate	A-10400	D
8" deck plate for wide spread applications	A-10800	E
Flow Rate: 0.38GPM aerator.	R-21503	F3
Flow Rate: 0.5GPM aerator.	R-21505	F4
Grid type drain, with overflow	A-13000	J
Grid type drain, without overflow	A-13100	I
Mechanical mixing valve, below sink	A-12910	M
Natural Stainless Steel finish	F-FinishSUS	S
Thermostatic mixing valve, below sink	A-12850	T

All Dimensions in Inches

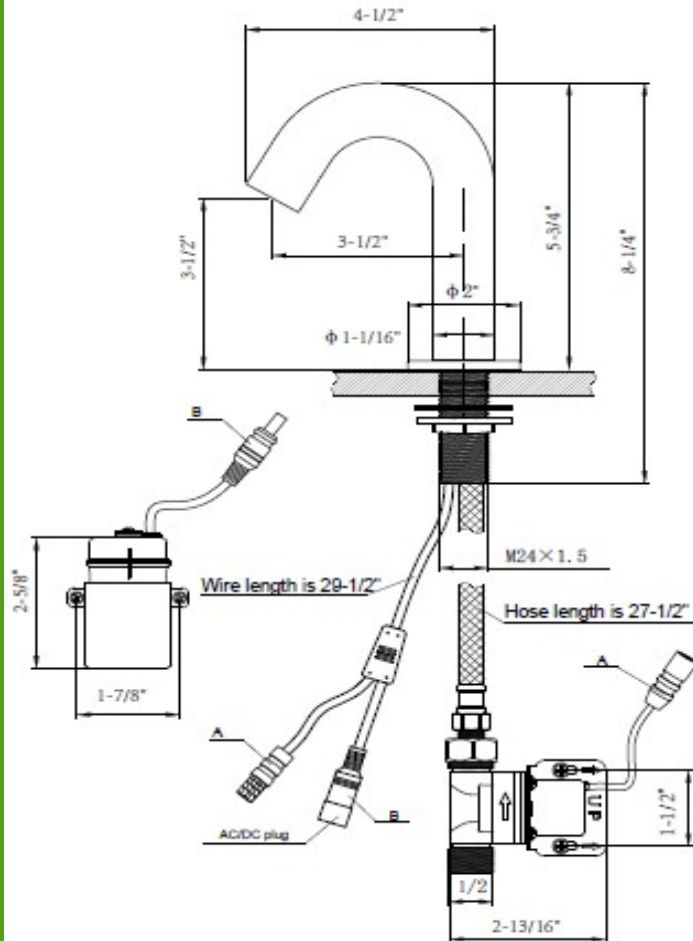

Notes

OTC Quality Products

www.otcquality.com Tel 866 558 3200 Email Info@otcquality.com