

OUT System

Specific system for external walls and facades, for residential, industrial and commercial applications


OUT System is an innovative outdoor wallpaper that is resistant to rain, yellowing and has anti-smog properties.

It is a technical wall covering with a maximum thickness of 1 mm, consisting of a fibreglass fabric, a sanitising primer, and a transparent finishing system. It can be applied to concrete walls, cement plaster, plasterboard for exteriors and with thermal insulation.

Comes with a 5 year colour fading warranty and a 10 year adhesion strength warranty, it is compliant with class B s1 d0 fire reaction standards.

The printing technology uses water-based, solvent-free inks.

The substrate is suitable for external facades, patios and terraces, in both residential and contract applications.

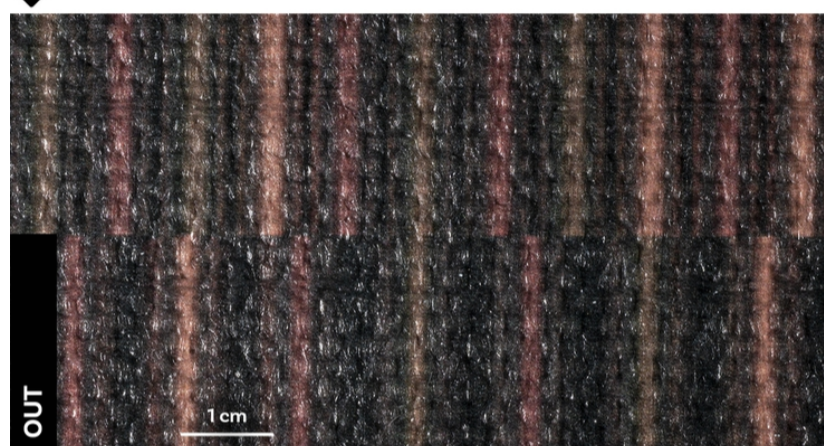

TECHNICAL FEATURES

Total thickness (minimum / maximum)	Fibre: 0.5 mm / Complete system: 1.0 mm
Total weight (minimum + maximum)	Fibre: 290 g/m ² ÷ 310 g/m ² / Complete system: 460 g/m ² ÷ 500 g/m ²
Description of material	Technical covering for outdoor areas with high decorative value suitable for high visual impact solutions
Nature of components	Substrate: printed fibreglass - Transparent finishes and waterproof primer

CERTIFICATIONS

Reaction to fire	Class B s1 d0
Permeability	sd Value: 1.53m (averagely water vapour resistance according to EN7783 Dry Cup)

10
YEARS
GUARANTEE

10-year
Guarantee



Resistance
against rain



Washable



Resistant to
yellowing
Anti-smog
properties