

PROJECT NAME	
ORDERING #	TYPE




DETAILS

Cost-effective configurable LED canopy light delivers 4,050 to 8,505 lumens and two CCTs. Includes quick-mount plate for surface or junction box mounting, or it can be pendant mounted on a 3/4" NPT conduit.

SPECIFICATIONS

Input Power	User selectable at install: 63W/45W/30W
Input Voltage	120-277VAC, 120-347VAC
Light Output	30W: 4,050 lumens 45W: 6,075 lumens 63W: 8,505 lumens
System Efficacy	135 lm/W
Average Lamp Life	50,000 hours
CCT	User selectable at install: 4000K/5000K
CRI	>70
Beam Angle	150°
Dimming	0-10V Dimming
Temperature Rating	-40°F to 113°F
Housing Material	Die-cast aluminum with heat-resistant polycarbonate lens
Housing Color	Bronze or White
Dimensions	9.53" x 9.53" x 3.39"
Certifications	DLC 5.1 Premium, UL cUL Wet Location
Warranty	5 Years

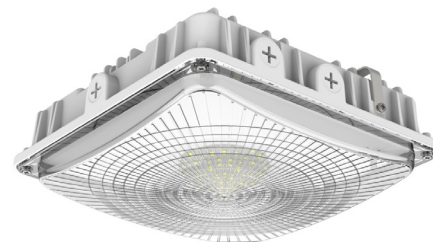


ORDERING

Example: **CANOPX2D63WSCSUD**

SKU Root	Wattage/Lumens	CCT	Certifications	Housing Color
CANOPX2D	63WS - 63W/45W/30W Selectable, Up to 8,505 lumens	CS - 4000K/5000K Selectable	UD - DLC, UL	BLANK - Bronze W - White

DIMENSIONS

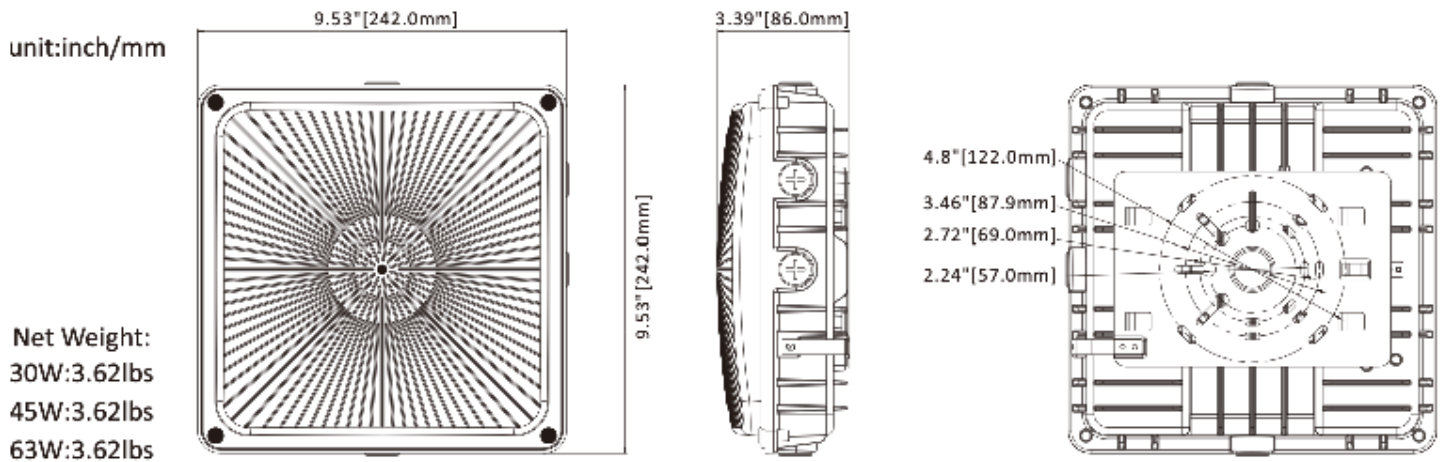

PHOTOMETRICS

