

Project Name: \_\_\_\_\_

Ordering #: \_\_\_\_\_ Type: \_\_\_\_\_



**5** YEAR WARRANTY

## OVERVIEW

<b>Wattage (W)</b>	40W, 80W, 120W
<b>Lumen Package (lm)</b>	Up to 17,400 lm
<b>Color Temperature (CCT)</b>	5000K
<b>Efficacy (lm/W)</b>	140 lm/W



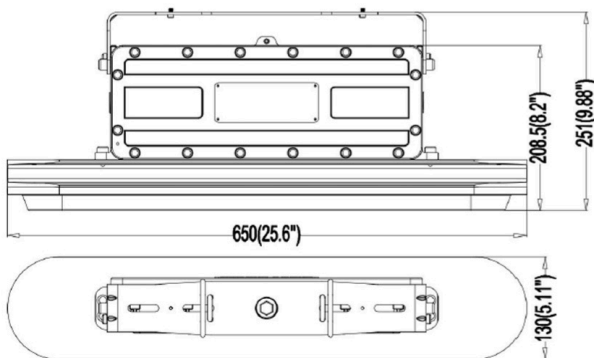
## ORDERING GUIDE

Example: **EXP-LIN-A-40-50-UL-OR**


SKU Root	Wattage / Lumens	CCT	Voltage	Finish	Options
<b>EXP-LINA</b>	<b>40</b> - 40W, 5,800 lumens <b>80</b> - 80W, 11,600 lumens <b>120</b> - 120W, 17,400 lumens	<b>50</b> - 5000K	<b>UL</b> - 120-277VAC <b>UH</b> - 347-480VAC (80W model only)	<b>OR</b> - Orange	<b>Blank</b> - None

## PRODUCT DIMENSIONS

40W Model






80W & 120W Models

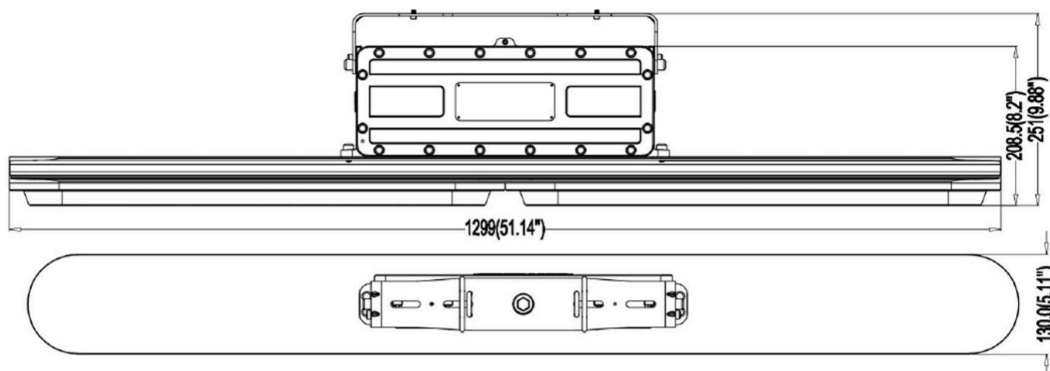

**SPECIFICATIONS**

<b>Wattage &amp; Lumens</b>	40W, 5,800 lumens 80W, 11,600 lumens 120W, 17,400 lumens
<b>Efficacy</b>	140 lm/W
<b>CCT</b>	5000K
<b>CRI (Ra)</b>	>80
<b>Input Voltage</b>	120-277VAC, 347-480VAC
<b>Average Lifetime</b>	50,000 hours
<b>IP Rating</b>	IP66
<b>Certifications</b>	UL
<b>Warranty</b>	5 Years

**ACCESSORIES**

SKU	Description	Image
<b>EXP-LIN-ACC-WIREGUARD</b>	Wire Guard for Linear Explosion Proof Lights	
<b>EXP-LIN-ACC-PMBRKT</b>	Pipe Mount Bracket	
<b>EXP-LIN-ACC-CMBRKT</b>	Side Surface Ceiling Mount Bracket	
<b>EXP-LIN-ACC-FMBRKT</b>	U-shaped Buckle Bracket	