

Project Name: _____

Ordering #: _____ Type: _____



5 YEAR WARRANTY

OVERVIEW

Wattage (W)	155W/130W/115W Selectable 210W/180W/155W Selectable 310W/270W/240W Selectable
Lumen Package (lm)	Up to 46,500 lm
Color Temperature (CCT)	4000K/5000K Selectable
Efficacy (lm/W)	Up to 150 lm/W



155W & 210W Model

SPECIFICATIONS

Wattage & Lumens	155W Selectable, Up to 23,250 lumens 210W Selectable, Up to 31,500 lumens 310W Selectable, Up to 46,500 lumens
Efficacy	Up to 150 lm/W
CCT	4000K/5000K Selectable
CRI (Ra)	80
Controls	0-10V Dimming Integral Sensor Receptacle CCT & Power Selectable
Input Voltage	120-277VAC or 277-480VAC
Average Lifetime	50,000 hours
Beam Angle	95°
Fixture Color	White
Certifications	DLC, UL
Warranty	5 Years



310W Model

ORDERING GUIDE


Example: **LHBX2D155WSCSUD**

SKU Root	Wattage / Lumens	CCT	Certifications	Voltage
LHBX2D	155WS - 115W/130W/155W Selectable, Up to 23,250 lumens 210WS - 155W/180W/210W Selectable, Up to 31,500 lumens 310WS - 240W/270W/310W Selectable, Up to 46,500 lumens	CS - 4000K/5000K Selectable	UD - DLC, UL	Blank - 120-277VAC HV - 277-480VAC

PRODUCT DIMENSIONS


DIMENSIONS	155W & 210W Model	310W Model
Product Dimension	14" x 11.5" x 2.1"	20.5" x 11.5" x 2.1"
Weight	5.5 lbs	7.3 lbs

**Normal
90-210W(1.2ft)**




Net Weight: 5.5Lbs/2.5kgs

With Sensor




Net Weight: 5.5Lbs/ 2.5kgs

With Emergency Driver

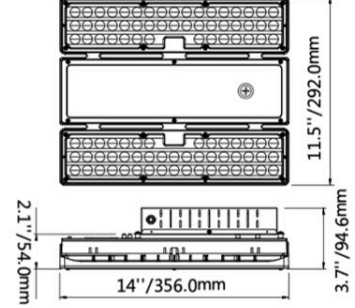


Net Weight: 7.9Lbs/3.6kgs


240-310W(1.7ft)

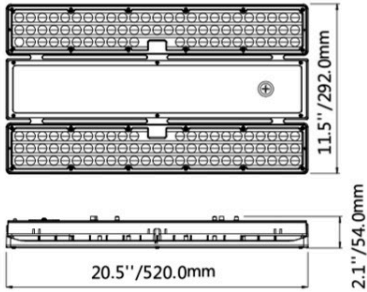

Net Weight: 7.3Lbs/3.3kgs

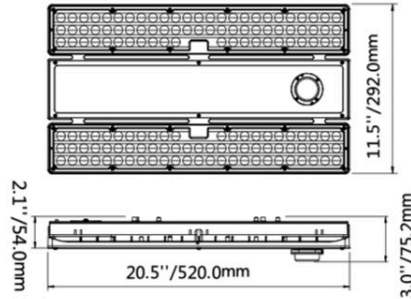

Net Weight: 7.3Lbs/ 3.3kgs

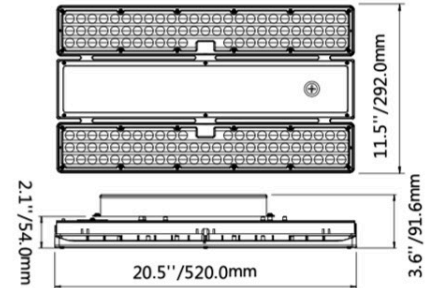

Net Weight: 10.1Lbs/4.6kgs

ACCESSORIES

SKU	Description
ACCXLHBX2SENSOR	Linear High Bay Motion Sensor
ACCXLHBX2REMOTE	Linear High Bay Remote Controller
ACCXLHBX2SURFMNT	Surface Mount/Pendant Mount Installation Box
ACCXLHBX2WGSM	Wire Guard for 155W & 210W Models
ACCXLHBX2WGLG	Wire Guard for 310W Model