

Project Name: _____

Ordering #: _____ Type: _____



OVERVIEW

Size	2'
Wattage (W)	45W, 70W, 95W
Lumen Package (lm)	Up to 11,600 lm
Color Temperature (CCT)	45W: 4000K or 5000K 70W and 95W: 5000K
Efficacy (lm/W)	Up to 134 lm/W






ORDERING GUIDE

Example: **2FTVTM3LB045W40W**

SKU Root	Photometry	Wattage / Lumens	CCT	Finish
2FTVTM3	LB - Low Bay	045 - 45W, Up to 12,700 lumens	40 - 4000K	W - White
		070 - 70W, 9,400 lumens	50 - 5000K	
	PG - Parking Garage	095 - 95W, 11,600 lumens	50 - 5000K	

PRODUCT DIMENSIONS

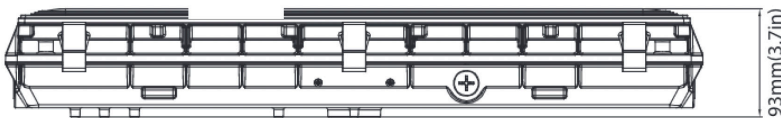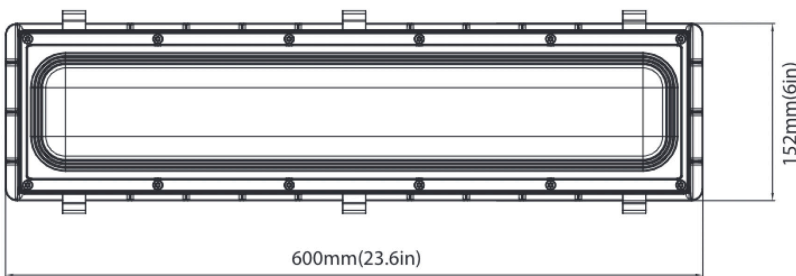

Net weight:

45W: 7.723lbs

70W: 8.034lbs

90W: 8.197lbs

SPECIFICATIONS

Size	2'
Wattage & Lumens	45W, Up to 6,000 lumens 70W, 9,400 lumens 95W, 11,600 lumens
Efficacy	Up to 134 lm/W
CCT	45W: 4000K or 5000K 70W and 95W: 5000K
CRI (Ra)	80
Controls	1-10V Dimming
Input Voltage	120-277VAC
Average Lifetime	50,000 hours
Mounting	Surface Mount, V-Hook Mount
Certifications	DLC, UL
Warranty	5 Years