

## Introduction to Everything Ventilation®

Part of Velair Group Limited, established in 2012, our product offering at Everything Ventilation® is simple, yet effective. Grouped into 'Good, Better and Best' we have fans suitable for all requirements.

Designed and manufactured in Europe, our range of ventilation fans are high quality, robust and feature the latest innovations and beautiful designs. We offer 5 star customer service alongside our industry leading 24 hour replacement warranties.

# **Everything Ventilation®**Contents

Pg 3	Lyra Air
Pg 5	Helix Air
Pg 7	Mela Air Glass
Pg 9	Lyra Air Matic
Pg 10	Carina Air
Pg 11	Corvos Air
Pg 12	Aquila Air
Pg 12	Warranties and Technical Support





## Lyra Air



#### **Technical Specification** 220-240V 15 watts Maximum Fan Speed 2500RPM Maximum Air Flow 98 m<sup>3</sup>/h 0.6kg Net Weight 95mm x 140mm x DxWxHxØ 140mm x 98mm Minimum Sound Level 35dB at 3 meters Part F Compliance Materials ABS & Polypropylene Class B Motor Class IPX2


Specification & graph shown for Timer 100mm. Further specifications available upon request.

## A robust, low profile axial fan with a 3 year manufacturers warranty.

This lightweight, ABS fan is ideal for installation in ceilings or walls and delivers maximum performance with minimum consumption.

**Product codes:** 

Standard 100mm White: EVELA100S001 Timer 100mm White: EVELA100T001 Timer 150mm White: EVELA150T001

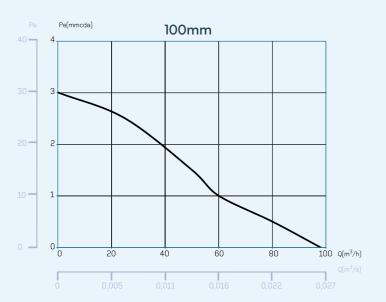



Warranty Sound Level (years)\*



Made in









Adjustable timer option



Standard option













Thermal Element protection



<sup>\*</sup> Replacement warranty. Terms & Conditions apply.

## Helix Air



Available finishes:

Any bespoke finish available upon request.

Technical Specifi	cation
Rated Voltage	220-240V
Input Power	8 watts
Maximum Fan Speed	2200RPM
Maximum Air Flow	110 m <sup>3</sup> /h
Net Weight	0.65kg
D x W x H x Ø	96mm x 150mm x 150mm x 98mm
Minimum Sound Level	20dB at 3 meters
Compliance	Part F & L
Materials	ABS & Polypropylene
Motor Class	Class B
IP Rating	IP45

Specification & graph shown for Timer 100mm. Further specifications available upon request.

## A low carbon, silent, IPX5 fan with a 5 year manufacturers warranty.

This energy efficient axial fan runs at an extremely quiet 20dB. It's modern and low profile design allows for it to fit seamlessly into any bathroom setting, whilst it's IP rating permits placement in all 3 of the electrical zones. Available in any bespoke finish to suit your clients needs.

#### Product codes:

Standard 100mm White: EVEHA100S001 Black: EVEHA100S003 Timer 100mm White: EVEHA100T001 Black: EVEHA100T003

Humidistat & Timer 100mm White: EVEHA100TH001 Humidistat & Timer 100mm Black: EVEHA100TH003





(years)\*


**Sound Level** 

















Adjustable speed (Humidistat only)



Bathroom







Any finish available



Adjustable timer option



Standard option



Humidistat option





#### Safety Features

Thermal Element protection



## Mela Air Glass



Available finishes:

Other finishes and options available upon request.


#### **Technical Specification** 220-240V 8 watts 2600RPM Maximum Fan Speed 115 m<sup>3</sup>/h Maximum Air Flow Net Weight 0.95kg 122.5mm x 150mm x DxWxHxØ 150mm x 98mm Minimum Sound Level 15dB at 3 meters Compliance Part F & L ABS, Polypropylene Motor Class Class B

## Energy efficient silent fan wrapped up in an elegant glass design, with a best in class 7 year manufacturers warranty.

Our top of the range axial fan encases a low carbon motor which runs at a highly efficient 8 watts and incredibly quiet 15dB. It's interchangeable glass cover, available in multiple finishes, makes it the perfect choice for any contemporary setting. Also available with digital display.

#### Product codes:

Timer 100mm White: EVEMAG100T001 Timer 100mm Black: EVEMAG100T003 Timer & Digital Humidistat Display 100mm White\*\*: EVEMAG100TH001





(years)\*

Warranty **Sound Level** 















Glass Cover





Other finishes available



Adjustable timer



Ballbearing





Bathroom



Part F









hermal Element protection



# Lyra Air Matic



Technical Specification	
Rated Voltage	220-240V
Input Power	15 watts
Maximum Fan Speed	2500RPM
Maximum Air Flow	98 m³/h
Net Weight	0.7kg
DxWxHxØ	89mm x 150mm x 150mm x 98mm
Minimum Sound Level	35dB at 3 meters
Compliance	Part F
Materials	ABS & Polypropylene
Motor Class	Class B
IP Rating	IPX2

Safety Features	
Motor Protection	
Thermal Element protection	


#### . CA IPX2

## High quality axial fan with automatic shutter and timer.

Designed to solve the problem of back draughts, the Lyra Air Matic's automatic shutter seals off unwanted cold air when not in operation, whilst it's timer feature is designed to partner energy efficiency alongside extraction time of your choice.

#### Product codes:

Timer 100mm White: EVELAM100T001

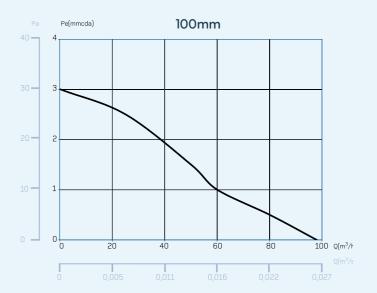



(years)\*







Replacement warranty, Terms & Conditions apply

Zone 3

Adjustable timer









Bathroom



## Carina Air



Technical Specification			
Rated Voltage	220-240V		
nput Power	28 watts		
Maximum Fan Speed	2300RPM		
Maximum Air Flow	130 m³/h		
Net Weight	0.98kg		
D x W x H x Ø	83.4mm x 190mm x 190mm x 97.6mm		
Minimum Sound Level	43dB at 3 meters		
Materials	ABS & Polypropylene		
Motor Class	Class B		
P Rating	IPX2		

Safety Features	
Motor Protection	
Thermal Element protection	




## Low profile, high performance centrifugal fan.

The Carina Air has back draught shutters as standard, keeping those unwanted cold draughts out. It's low profile design features high quality ABS housing making it the perfect choice to go almost unnoticed within any wall or ceiling.



Timer 100mm White: EVECAA100T001









Zone 3

Adjustable timer

Back draught shutters

Low profile

\* Replacement warranty, Terms & Conditions apply

# Corvos Air In-line mixed flow fan with high performance and low noise level.





**Technical Specification** 

It's easily accessible motor allows for speed control adjustment without interfering with existing duct system, whilst it's mixed flow impeller runs at a very quiet 18dB.

Product codes:

Standard 100mm White: EVECOA100S001 Standard 150mm White: EVECOA150S001





220-240V 40/18 watts 2300/1700RPM

270/190 m<sup>3</sup>/h

266.6mm x 168mm x 232mm x 98mm

18dB at 3 meters

**K IP44** 

Rated Voltage

Net Weight D x W x H x Ø

Maximum Fan Speed Maximum Air Flow

Minimum Sound Level

Specification & graph shown for Standard 100mm. Further specifications available upon request.

**Sound Level** 



Made in

Warranty

(years)\*

## **Aquila Air**





Technical Specification				
Rated Voltage	220-240V			
Input Power	15 watts			
Maximum Fan Speed	2500RPM			
Maximum Air Flow	98 m³/h			
Net Weight	1.10kg			
DxWxHxØ	3000 mm x 140mm x 140mm x 100mm			
Minimum Sound Level	35dB at 3 meters			
Compliance	Part F			
Materials	Polypropylene & PVC			
Motor Class	Class B			
IP Ratina	IPX2			


Safety Features
Motor Protection
Thermal Element protection

**UK IPX2** 

Specification & graph shown for Timer 100mm. Further specifications available upon request.

## Shower fan with installation kit and adjustable timer.


Our in-line duct fan comes with an installation kit comprising of flexible PVC ducting and two fixed louver grills, alongside an adjustable electronic timer.





(vears)<sup>3</sup>

**Sound Level** 





Adjustable timer





Bathroom





<sup>\*</sup> Replacement warranty. Terms & Conditions apply

### Our industry leading 24 hour replacement warranty.

### We pride ourselves on our very simple replacement service.

Simply call our team on +44 (0) 1425 616 103 and report your fault.

If we cannot solve the problem over the phone, a replacement unit will be dispatched that very day\*.

When you receive the replacement, simply follow the instructions found in the box to fit your replacement unit.

That's it, you're good to go!

Please place the potential faulty unit in the same box, secure and email everything@velairgroup.com or call +44 (0) 1425 616 103



#### Now, the good to know:

Our 24hr service runs Monday-Friday, only in UK and mainland Europe, and only applies to units marked with 24hr replacement warranty. In order to gain 24hr replacement the initial fault must be recorded before 1pm that day, if the fault is recorded after 1pm, the replacement unit will be dispatched the next day\*. Non return of the potentially faulty unit will lead to a charge. If the returned potentially faulty unit is deemed out of warranty or the fault is not warranty related i.e. vandalism, excessive motor wear, then a charge will be applied. We take no responsibility for courier delays.

## Our Technical Support Team provides a five-star service supporting customers with their hand dryer needs.



You can contact one of the team on +44 (0) 1425 616 103 or everything@velairgroup.com



Velair Group Limited

2E/2F Queensway, Hampshire, BH25 5NN
+44 (0) 1425 616 103
everything@velairgroup.com

