




Remove the screws to remove the back cover and top cover.



Keep note of the wiring connection information,
Then loosen the connection.

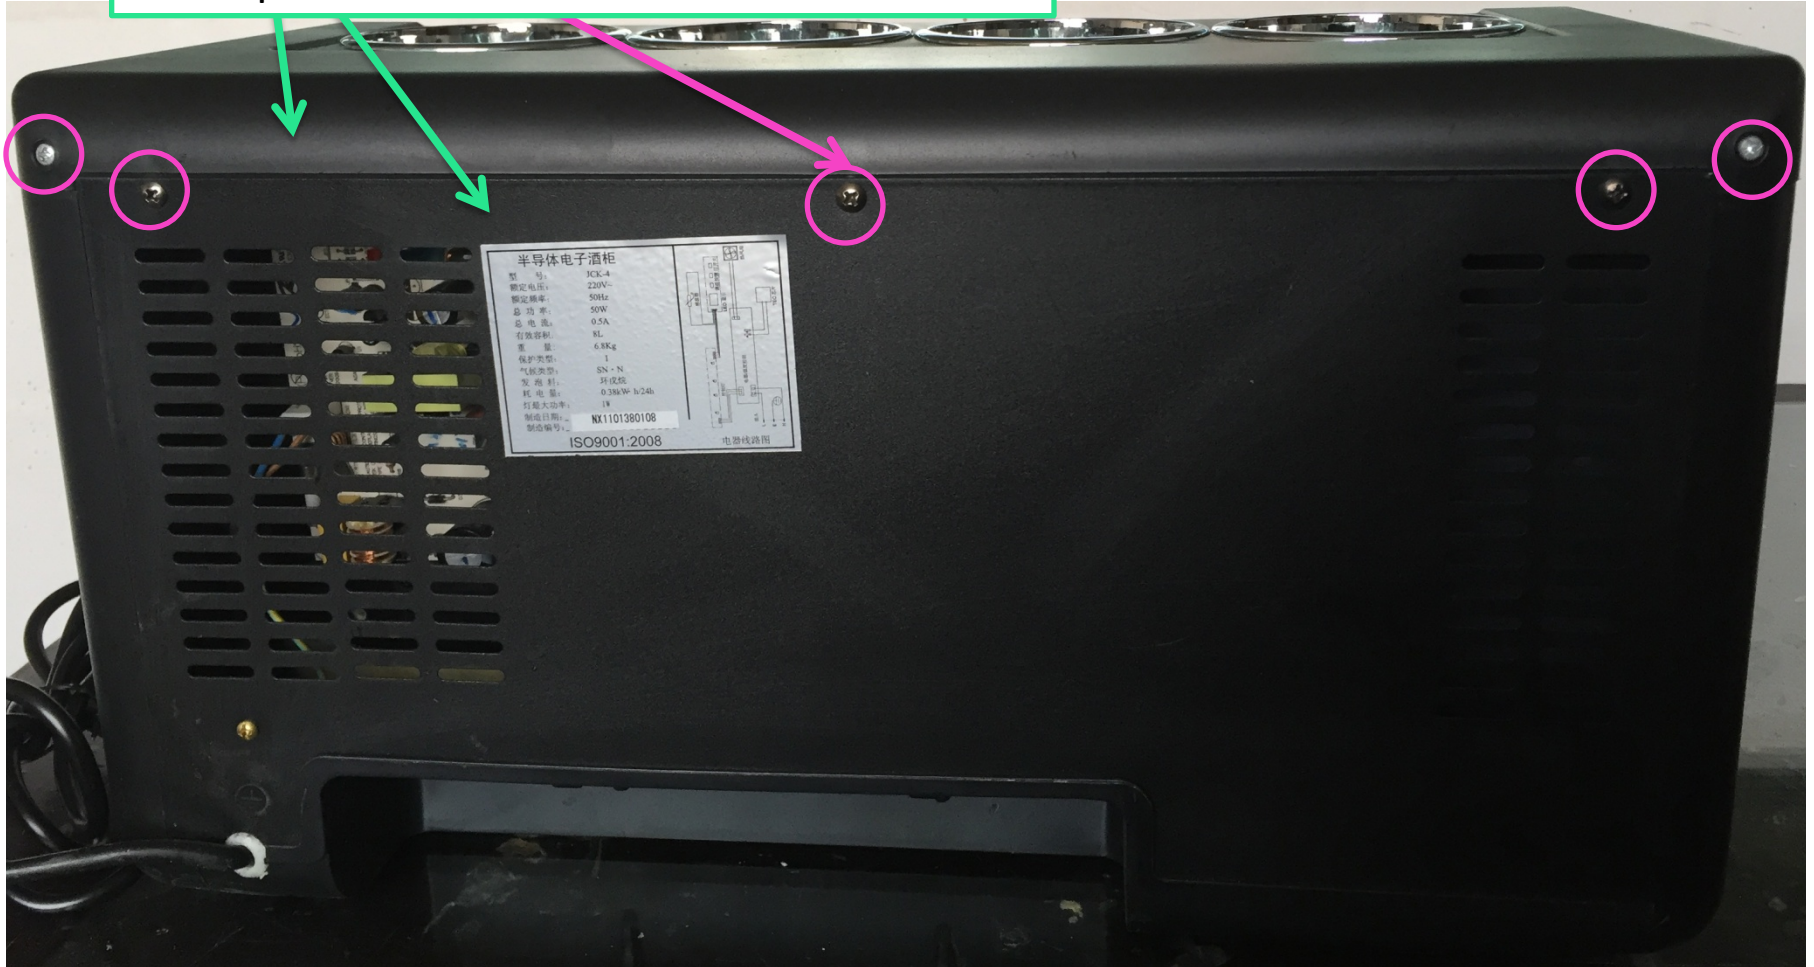

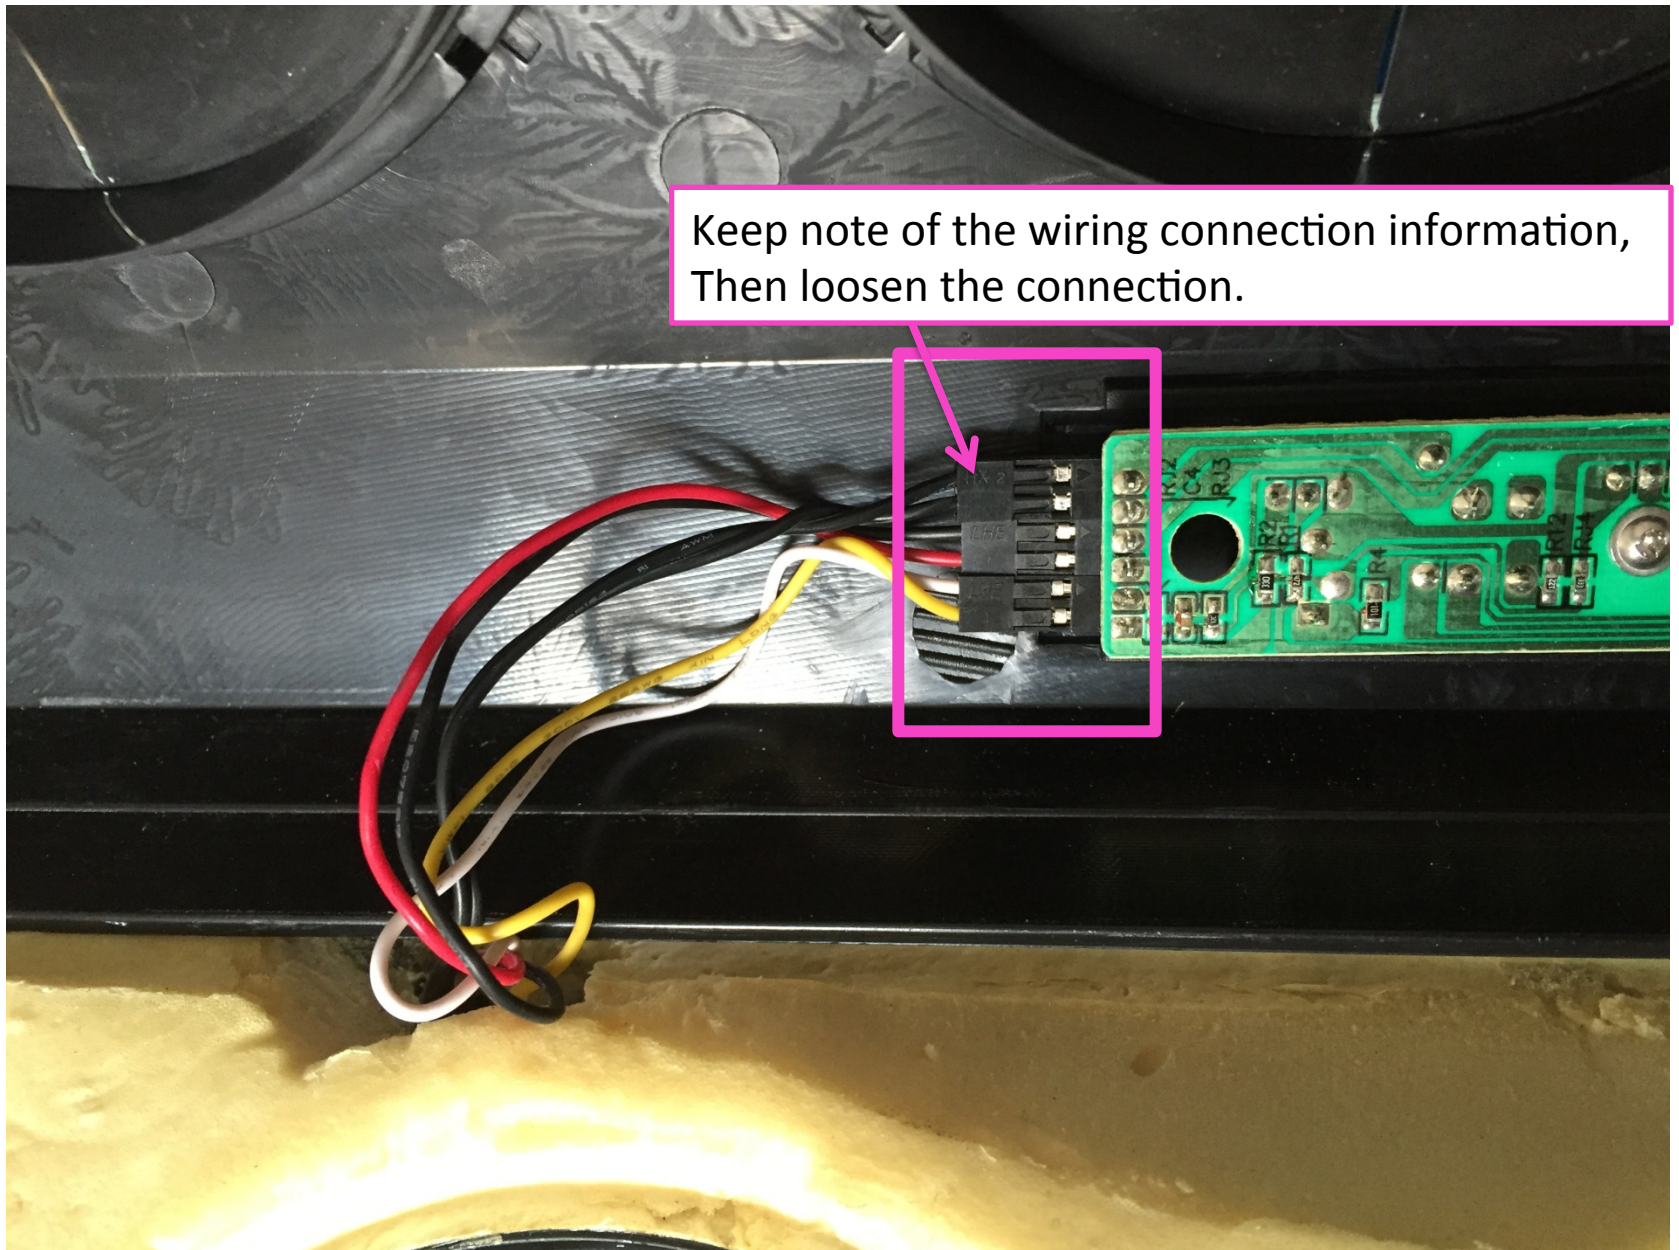


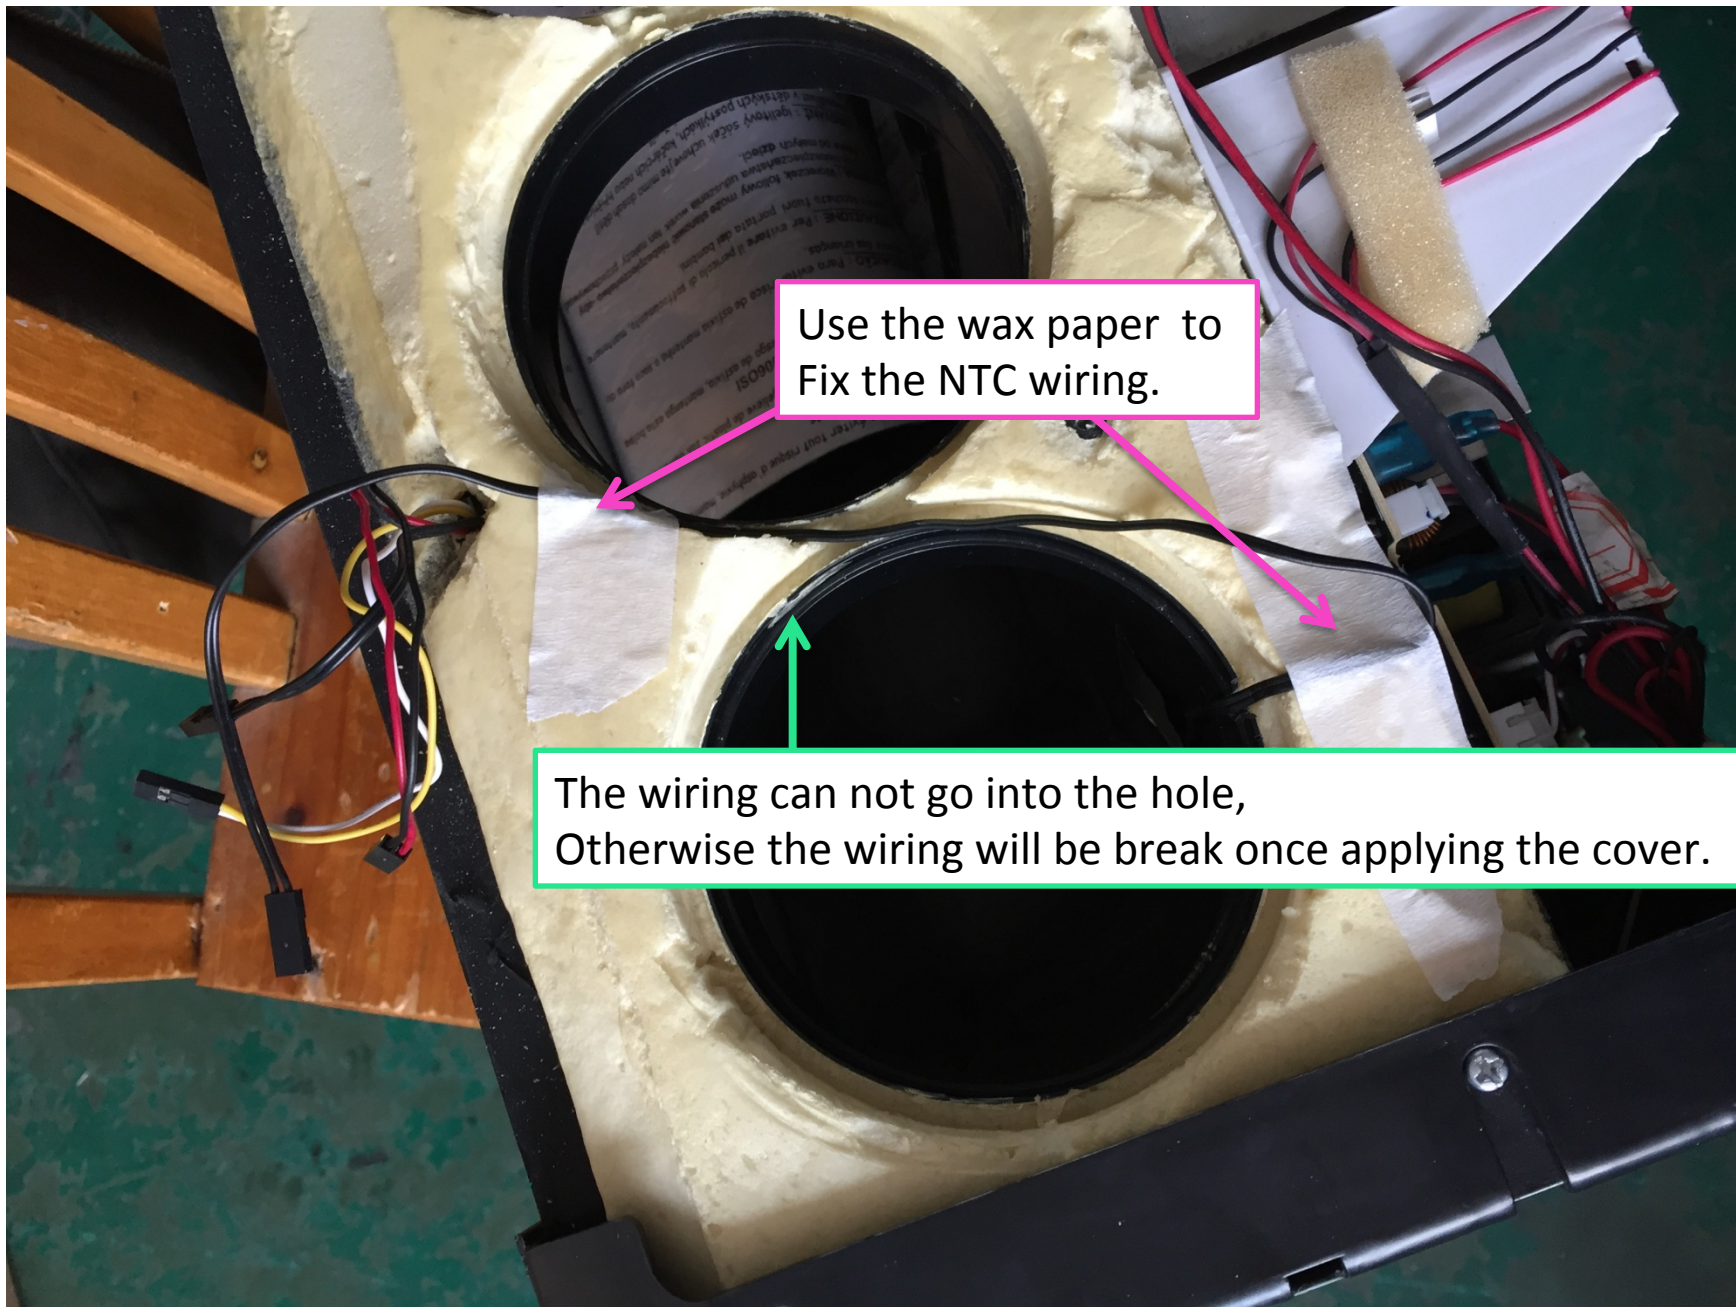

Use the wax paper to
Fix the NTC wiring.

The wiring can not go into the hole,
Otherwise the wiring will be break once applying the cover.

Push the corner of the Temp control board as shown and remove the Temp control board.

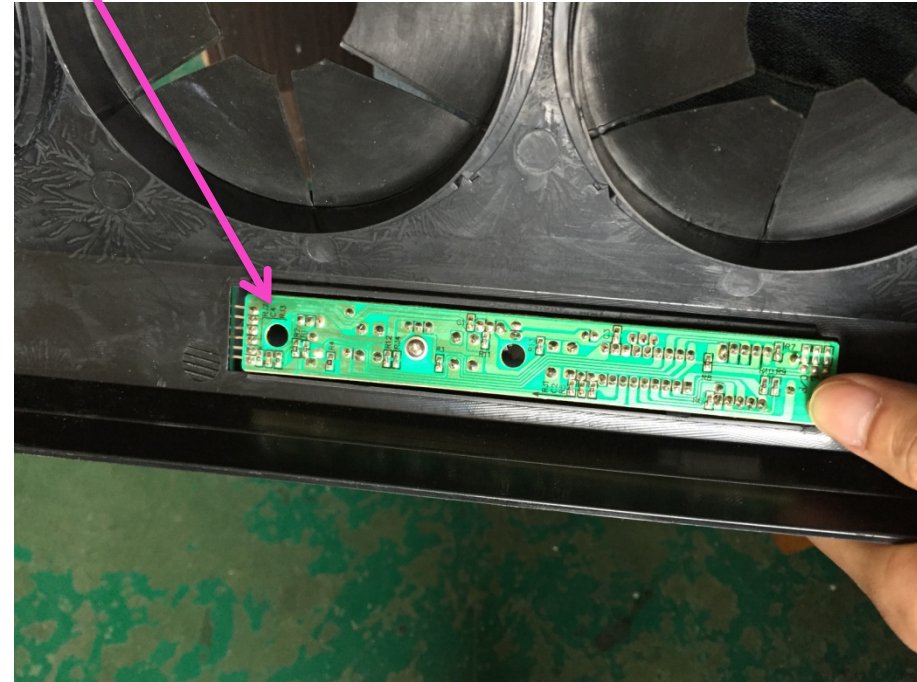



Re-assemble the top cover.(Careful attention to the NTC that it is not forced in)

Connecting the wiring back to the Temp control board.

Careful attention to connect the new NTC.
And discard the old one.

Power on to test.



Re-Assemble the Temp control board and back cover.

