

# Assembly instructions for 7ft B/D Module.


Fasteners. B/D-7

#### Tools needed:

- (1) Hammer
- (1) Power drill
- (1) Level
- \*Suggested 18 guage Brad Gun with 11/4" brad nails will make install easier.

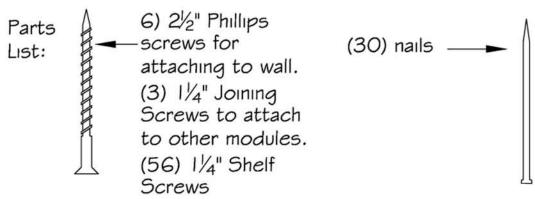


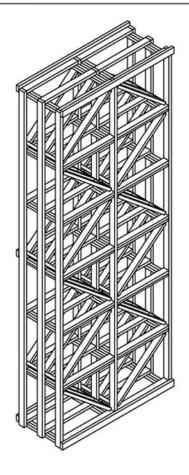






Assembly instructions for 7ft B/D Module. Racking. B/D-7

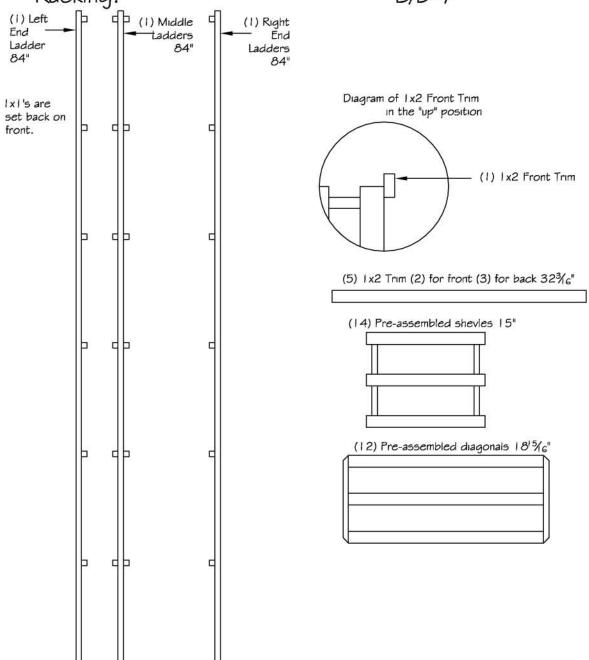


# step 1




Step I: (Attaching middle shelf to right end ladder and middle ladder)
Arrange the right end ladder and the middle ladder making sure the set back on the rungs are facing forward. Place one pre-assembled shelf on the fourth rung. The front of the shelf has a lix1 tim piece fastened under the lix2 cross support. From the inside, either brad hail or screw the shelves onto the rung in two places.

### step 3




Step 3: (Attaching middle shelf to left end ladder and middle ladder)
Take the left end ladder and move it into place on the left side in the same
way as the right end ladder. Place one pre-assembled shelf on the fourth rung.
The front of the shelf has a IxI tim piece fasteried under the Ix2 cross
support. From the inside, either brad hall or screw the shelves onto the rung
in two places.

# step 2




Step 2: (Attaching remaining shelves to right end ladder and middle ladder) Place the other six shelves onto the remaining six rungs and attach in the same way as in Step 1. Make sure the shelves with the trim pieces are facing the front.

# step 4



Step 4: (Attaching remaining shelves to end ladder and middle ladder) Place the other six shelves onto the remaining six rungs and attach in the same way as in Step 1. Make sure the shelves with the the trim pieces are facing the front.


step 5



Step 5: (Attaching 1x2 trim to front of rack)


Use two of the 1x2x24½" trim pieces and attach them to the top and bottom. Both of the these should be placed so the remaining trim is up.

step 7




Step 7: (Inserting diagonals)
Take all eight pre-assembled diagonals and insert them into the eight openings.

step 6



9tep 6: (Attaching 1x2 trim to back of rack)
Take the last three 1x2x24½" trim pieces and attach them to the 1st, 5th and
8th shelf from the bottom to the top. All of the these should be placed so the
remaining trim sup. The exposed area of the trim will be used to screw
through to apply the rack to the wall.

step 8 Finish



Step 8: (Finish) Fasten to the wall through the back supports using the  $2\frac{1}{6}$ " screws.

