


Model: VBD-024-024DM

Input Voltage:	100-130V AC
Input Current at Max Load:	0.38 A
Frequency:	47-63 Hz
Output Voltage:	24V DC
Output Current:	1.0 A
Max Power:	24W
Dimensions L x W x H:	332mm x 78mm x 38mm
Class Certification:	Class 2
Weight:	0.804 kg
IP Rating:	IP20 (Dry, and Damp Locations)
Dimmable:	Triac/ Phase-cut Dimming
Wiring/Housing:	Hardwire
Operating Temperature:	at least 90°C
Standards:	ETL/FCC/RoHS


Job Name: _____

Distributor: _____

Type: _____

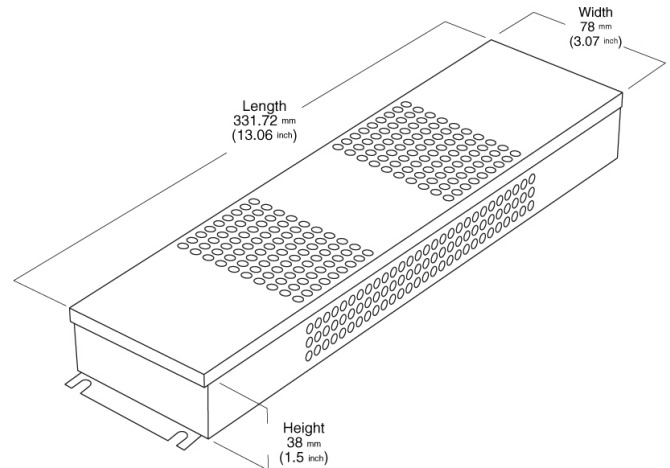

Installation Diagram

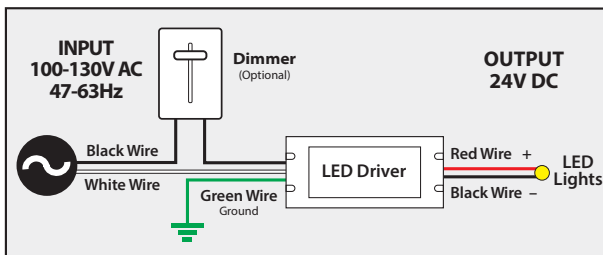

Dimming

Veroboard Phase Cut Dimming Constant Voltage LED drivers work with any standard Leading Edge, MLV, or TRIAC dimmers. The dimmer switch must be installed on the 120V AC side of the driver.



24V DC
24W
CLASS 2

SKU: 666561415839