



CV Triac Dimmable LED Driver

Model No:	LD040D-VA17024-M30
Input Voltage:	120V AC
Input Current:	0.67A
Frequency:	50-60 Hz
Output Voltage:	24V DC
Output Current:	1.7A
Max Power:	40.8W
Dimensions (Driver):	108mm x 32mm x 43mm
Dimensions (J-Box):	133mm x 41mm x 106mm
Ambient Temperature (Ta):	40°C
Case Temperature (Tc):	90°C
IP Rating:	IP20
Dimmable:	Triac/Phase-Cut Dimming
Wiring/Housing:	Hardwire
Standards:	FCC/UR/cUR/RoHS


Job Name: _____

Distributor: _____

Type: _____

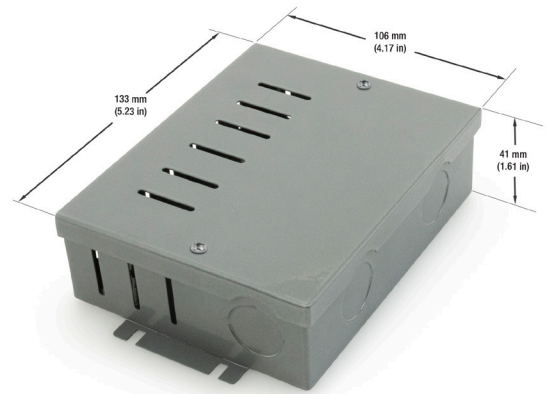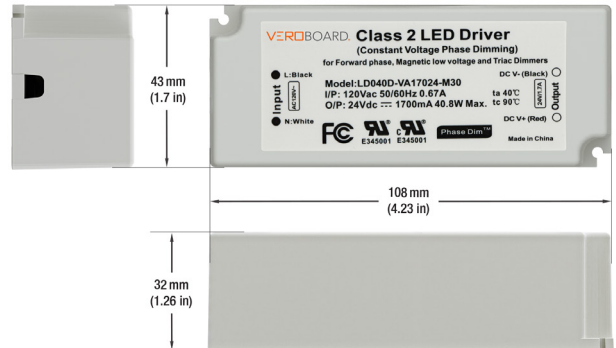

Installation Diagram

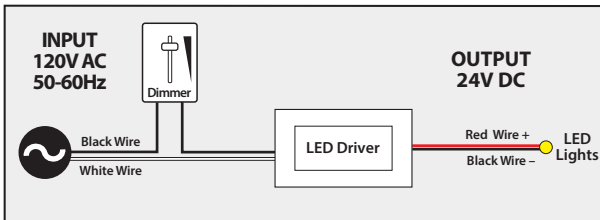

Triac Dimming


Veroboard Constant Voltage Triac Dimming LED Driver works with any standard Leading Edge MLV, TRIAC, or nearly many Lutron/ Leviton dimmers. The dimmer switch installed should be on the 120VAC side of the LED driver.

Model: LD040D-VA17024-M30



SKU: 666561418168

Model: LD040D-VA17024-M30-JB

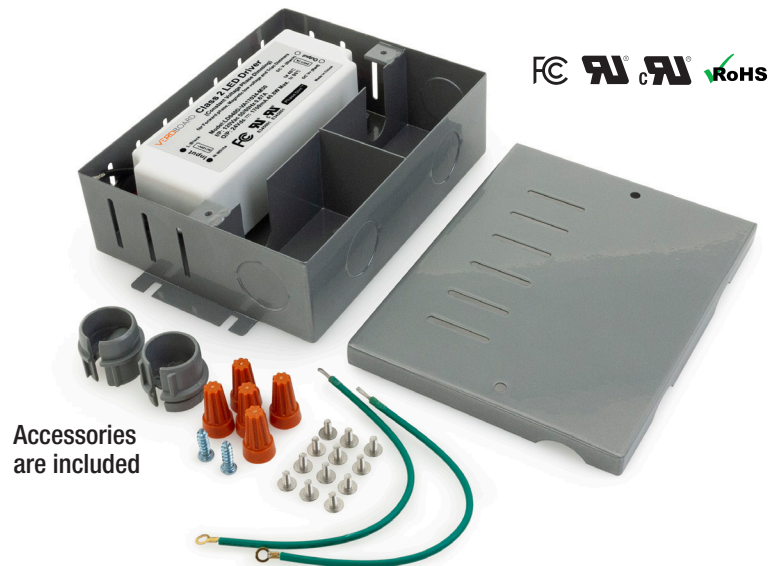

Accessories are included

SKU: 666561433925