


Model: VBD-024-060VTD2JV2

Input Voltage:	100 – 277V AC
Input Current at Max Load:	0.9 A
Frequency:	50/60 Hz
Output Voltage:	24V DC
Output Current:	2.5 A
Max Power:	60W
Dimensions L x W x H:	332mm x 78mm x 38mm
Class Certification:	Class 2/Class P/Type HL
Weight:	0.932 kg
IP Rating:	IP20 (Dry and Damp Locations)
Dimmable:	Triac/0/1-10V (5 in 1 Dimming)
Wiring/Housing:	Hardwire
Operating Temperature:	at least 90°C
Standards:	FC/UL/RoHS


Job Name: _____

Distributor: _____


Type: _____

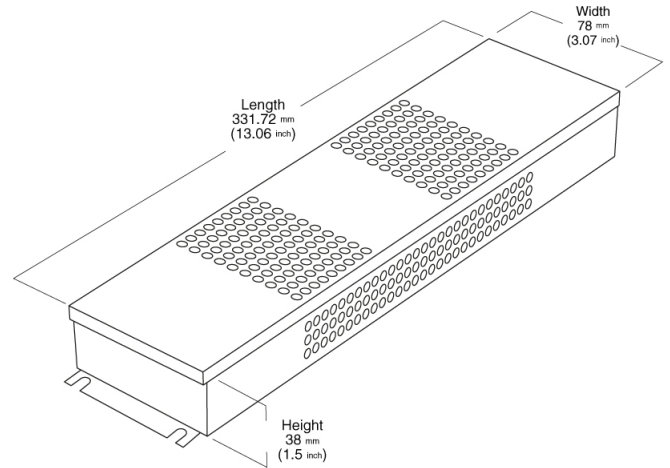

Installation Diagram (with 0-10V Dimmers)

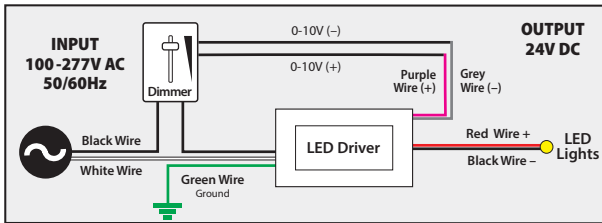


(with Triac and Phase-cut Dimmers)

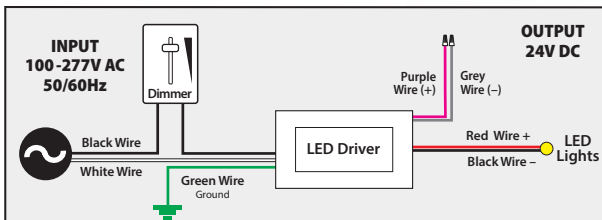

Dimming

Veroboard 5 in 1 Dimming Constant Voltage LED drivers work with any standard Leading Edge, MLV, TRIAC or 0-10V dimmers. The dimmer switch must be installed on the 120V AC side of the driver.

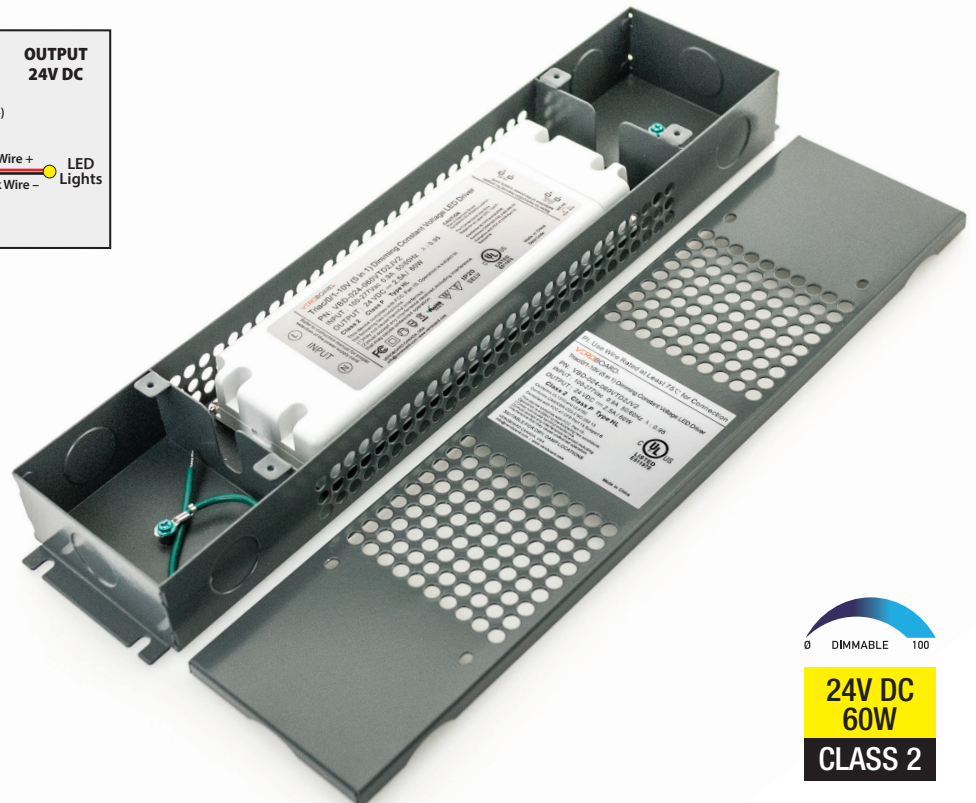

24V DC
60W
CLASS 2

SKU: 666561419226