


## Model: VBD-012-080VTD2JV2

<b>Input Voltage:</b>	100 – 277V AC
<b>Input Current at Max Load:</b>	1.15 A
<b>Frequency:</b>	50/60 Hz
<b>Output Voltage:</b>	12V DC
<b>Output Current:</b>	6.6 7A
<b>Max Power:</b>	80W
<b>Dimensions L x W x H:</b>	362mm x 78mm x 56mm
<b>Class Certification:</b>	Class P/Type HL
<b>Weight:</b>	1.854 kg
<b>IP Rating:</b>	IP67 (Dry and Damp Locations)
<b>Dimmable:</b>	Triac/0/1-10V (5 in 1 Dimming)
<b>Wiring/Housing:</b>	Hardwire
<b>Operating Temperature:</b>	at least 90°C
<b>Standards:</b>	FC/UL/RoHS


Job Name: \_\_\_\_\_

Distributor: \_\_\_\_\_


Type: \_\_\_\_\_

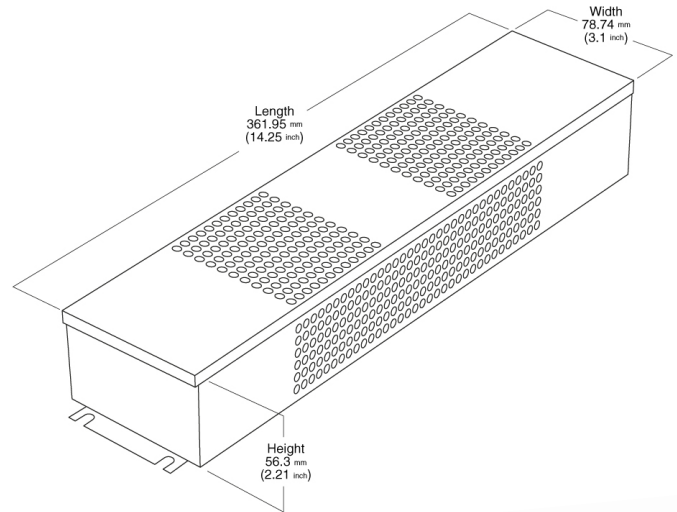

### Installation Diagram (with 0-10V Dimmers)

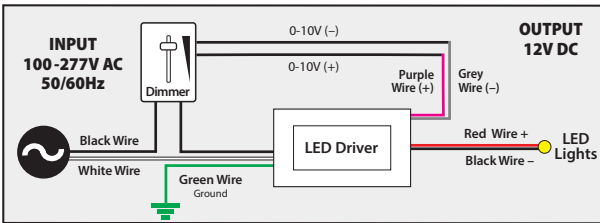


### (with Triac and Phase-cut Dimmers)

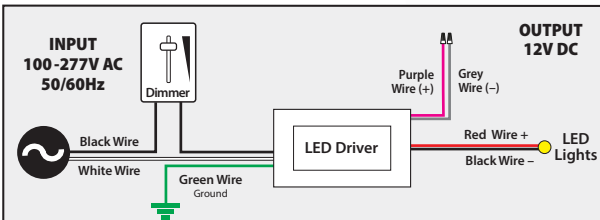

## Dimming

Veroboard 5 in 1 Dimming Constant Voltage LED drivers work with any standard Leading Edge, MLV, TRIAC or 0-10V dimmers. The dimmer switch must be installed on the 120V AC side of the driver.

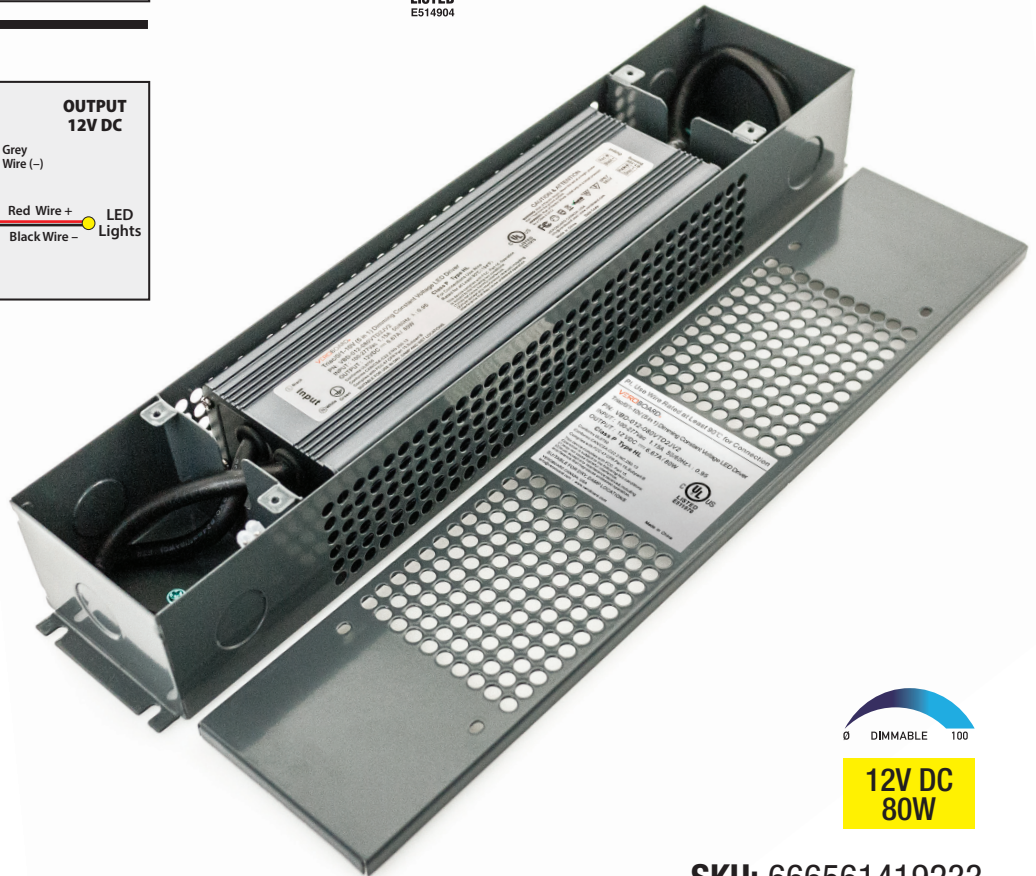

**12V DC  
80W**

**SKU: 666561419233**