

VEROBOARD®

3.5" Trimless Downlight

Veroboard 3.5 inches trimless downlight is specially designed to eliminate glare when illuminated. It is an IC-rated fixture that comes along with a junction box LED driver. It has the option of choosing desired color temperature from 2700K-3000K-3500K-4000K-5000K. This light is perfect for both new construction and remodeling installation with easy push spring clips.

SPECIFICATIONS



Engine Model No:	LED 35-S12W-L5CCTWH-T
Voltage:	120V AC
Wattage:	12W
LED Driver:	IC Rated
Color Temperature:	5CCT Selectable Color Temperature (2700K-3000K-3500K-4000K-5000K)
Dimmable:	Yes
Dimming:	100 - 10% (Triac Dimming)
Dimmers:	LED/CEL Dimmers
Brightness:	800 Lumens
Rendering Index:	CRI>90
LED Type:	Integrated COB LED
Fixture Color:	White
Fixture Material:	Die-Cast Aluminum
Rated Life:	50,000 Hours
Installation:	Recessed/Flush Mount
IP Rating:	IP20 (Damp Locations)
Outer Dimensions:	Ø76 x 74 mm Depth (Ø3 x 2.9 in)
LED Driver Dimensions:	95 x 59 x 39 mm (3.75 x 2.34 x 1.56 in)
Cut Size:	82 mm (3.25 in)
Package Content:	Light Fixture with IC-Rated LED Driver
Certification:	FCC/ETL/Energy Star/RoHS



Selectable
Color Temperature
Switch



**LED DRIVER
INCLUDED**






Disclaimer:

The data and information contained in this specification sheet are subject to change without notice; the ratings supplied are provided based on the product manufacturer. The information contained in this specification sheet should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. In no event shall Veroboard be liable for any incidental or consequential damages resulting from the use, misuse, or inability to use the product. This exclusion applies regardless of whether such damages are sought based on breach of warranty, breach of contract, negligence, strict liability in tort, or any other legal theory.

Job Name: _____

Distributor: _____

Type: _____

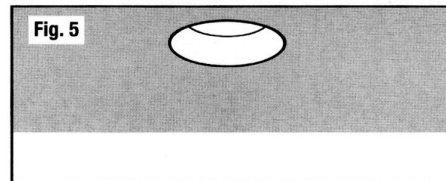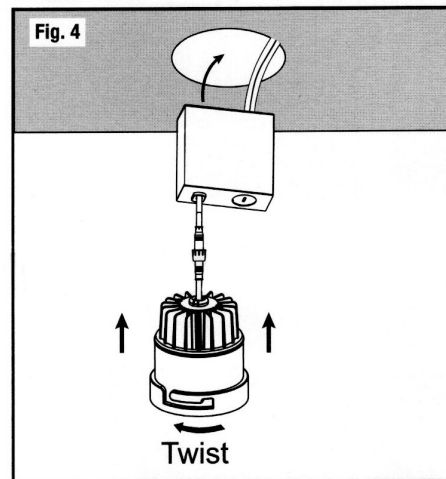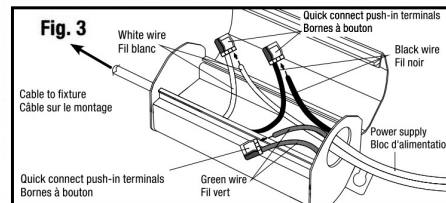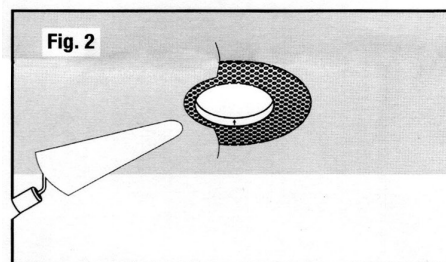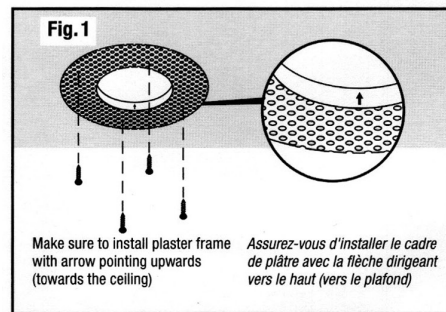

SKU: 666561425173


Light Measurement Report

Print date: 2023-01-06

Measurement date and time: 2023-01-06 2:32:31 PM – Measurement no. VFR-230106-0056-MS

Luminous Intensity diagram

Unit: 0-100% of peak intensity

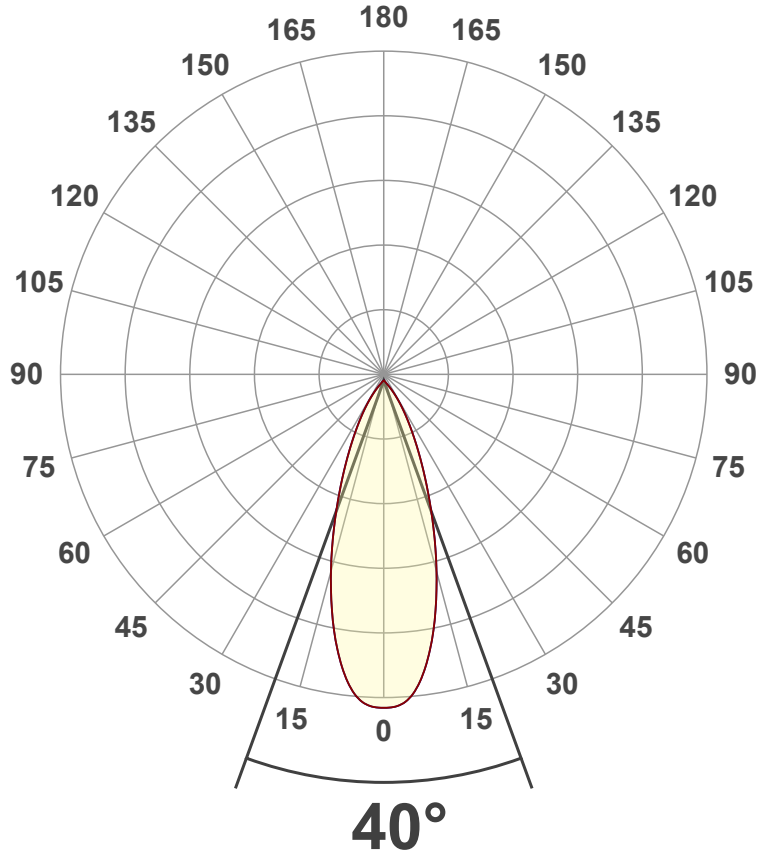

Main Values

Output (total Lumen)	800 lm
Lumen Up% / Down%	0% / 100%
Peak Intensity	1663 cd
Beam Angle (50%)	40°
Beam Angle (90%)	36.7°
Beam Angle (10%)	36.7°

Cut-off Angle

Average 2,5%	87.4°
--------------	-------

Field Angle


Average 10%	69.8°
-------------	-------

Intensity Ratio

In 120° cone	99.1%
In 90° cone	96.8%

C000-C180
C090-C270

Linear distribution diagram - Intensity (candela) vs γ -angle

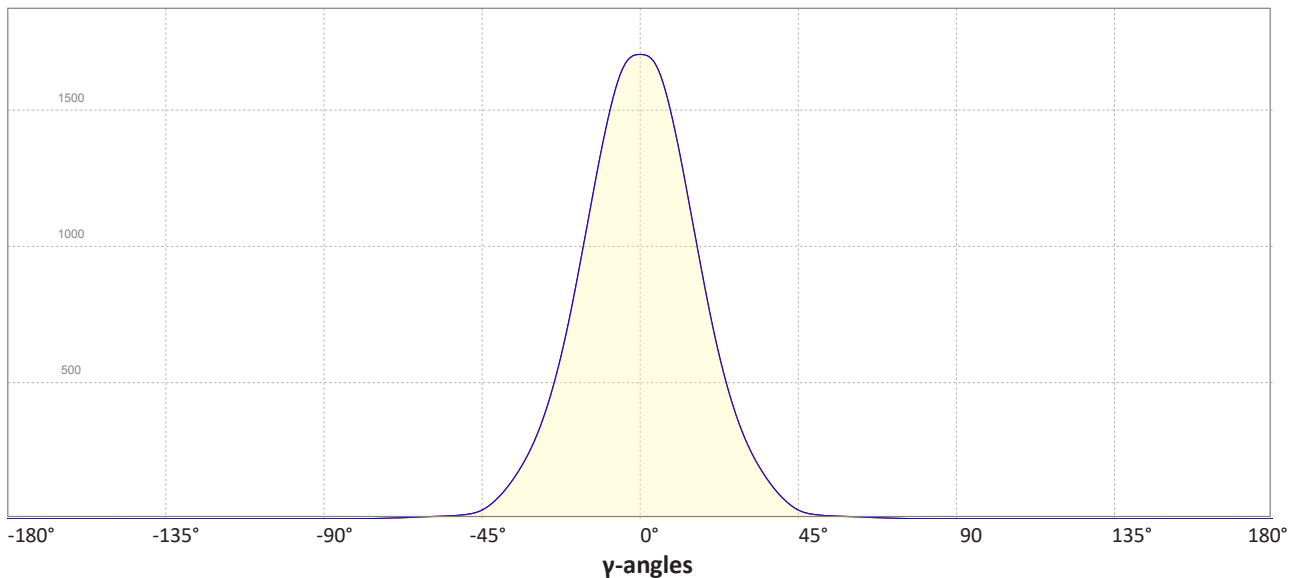

Light Measurement Report

Print date: 2023-01-06

Measurement date and time: 2023-01-06 2:32:31 PM – Measurement no. VFR-230106-0056-MS

Color details


Correlated Color Temperature, Target CCT = 3000 K
 Correlated Color Temperature, Measured CCT = 2895 K
 Color Rendering Index CRI 92.8
 Color Rendering Index, R9 (red component) R9 = 55.8
 Color Rendering TM30-18 R_f 89.3 – R_g 94.4
 Color Quality Scale CQS = 90.1

MacAdam Steps
 Color coordinates CIE 1931 (x;y) = (0.437;0.404)
 Color coordinate CIEs 1960 (u';v') = (0.251;0.348)
 Color deviation from BBL Duv = 0.0027
 Color coordinate CIEs 1976 (CIELUV) (u'';v'') = (0.251;0.251)


CIE 1931



CIE 1931 – zoomed on Planckian locus

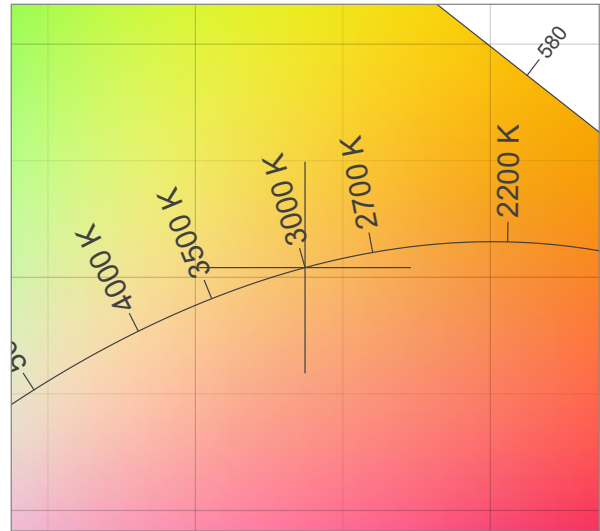


Color Rendering Index per reference color (CIE 1995)

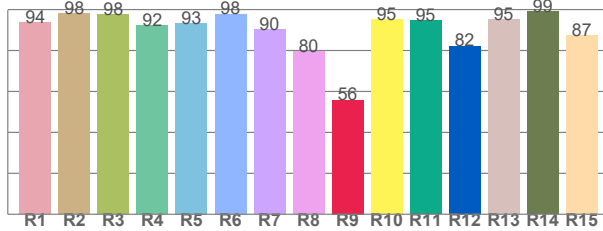


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93.6	98.0	97.5	92.3	93.3	98.0	90.2	79.6	55.8	95.1	94.6	82.3	95.1	99.1	87.4

Spectral power distribution (SPD) / W/nm – 0-100%

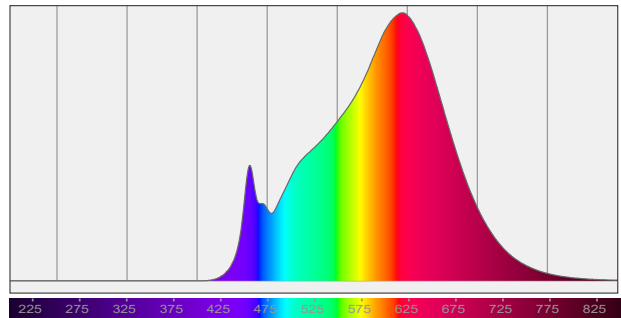


TM30-18 Rf-values per hue bin

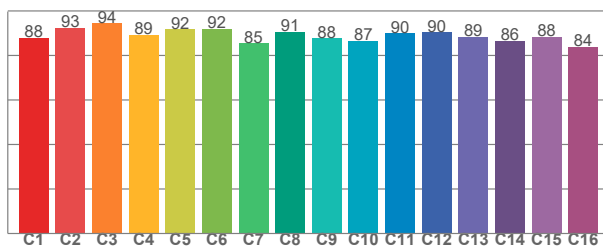

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
88.1	92.5	94.5	89.4	91.7	91.9	85.4	90.6	87.7	86.6	90.0	90.5	88.5	86.5	88.3	83.8

Color Quality Scale by reference color

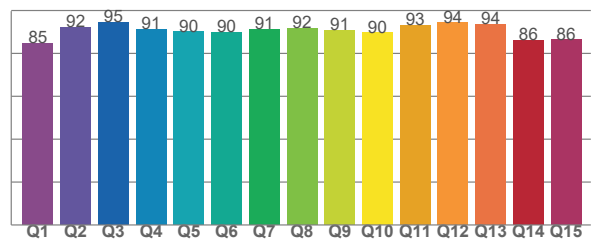

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
84.8	92.2	94.6	91.2	90.1	89.8	91.1	91.7	90.8	89.7	93.2	94.3	93.7	86.1	86.4

Light Measurement Report

Print date: 2023-01-06

Measurement date and time: 2023-01-06 2:32:31 PM – Measurement no. VFR-230106-0056-MS

Beam Details

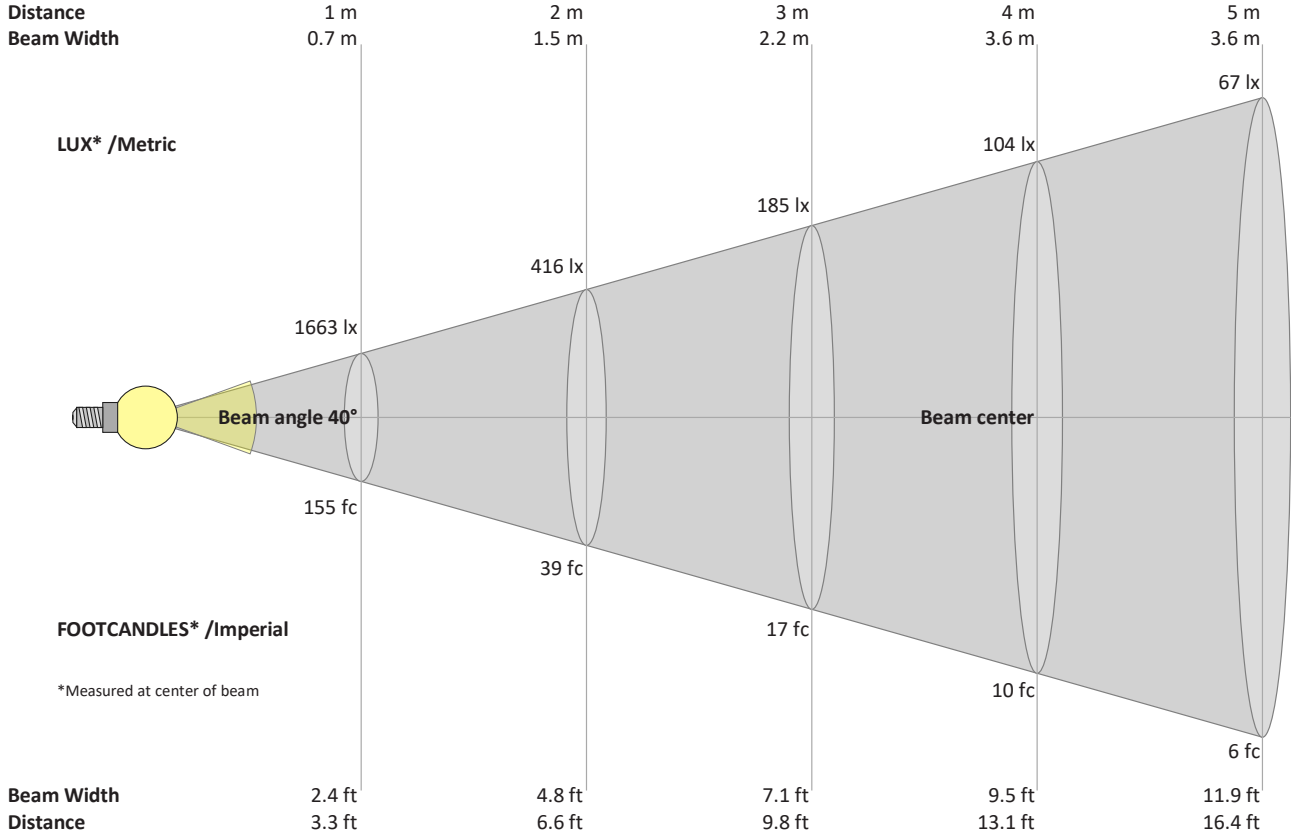

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
1663	416	185	104	67	46	34	26	21	17	14	12	10	8	7	6	6	5	5	4	lux
154.5	38.6	17.2	9.7	6.2	4.3	3.2	2.4	1.9	1.5	1.3	1.1	0.9	0.8	0.7	0.6	0.5	0.5	0.4	0.4	fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	y
1663	1658	1636	1579	1493	1385	1260	1125	990	856	728	612	511	423	346	283	230	184	145	111	cd
100%	100%	98%	95%	90%	83%	76%	68%	60%	51%	44%	37%	31%	25%	21%	17%	14%	11%	9%	7%	of 0°val

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	y
1663	1658	1636	1579	1493	1385	1260	1125	990	856	728	612	511	423	346	283	230	184	145	111	cd
100%	100%	98%	95%	90%	83%	76%	68%	60%	51%	44%	37%	31%	25%	21%	17%	14%	11%	9%	7%	of 0°val

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	y
1663	1658	1636	1579	1493	1385	1260	1125	990	856	728	612	511	423	346	283	230	184	145	111	cd
100%	100%	98%	95%	90%	83%	76%	68%	60%	51%	44%	37%	31%	25%	21%	17%	14%	11%	9%	7%	of 0°val

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	y
1663	1658	1636	1579	1493	1385	1260	1125	990	856	728	612	511	423	346	283	230	184	145	111	cd
100%	100%	98%	95%	90%	83%	76%	68%	60%	51%	44%	37%	31%	25%	21%	17%	14%	11%	9%	7%	of 0°val