

OTM-TD252500-280-12


Constant Current 280mA 24-48V 12W Dimmable

Model No.:	OTM-TD252500-280-12
Input Voltage:	90-130V AC
Input Current:	0.9A
Input Frequency:	50/60Hz
Output Voltage:	24-48V DC
Output Current:	280mA
Max Load:	12W
Dimmable:	Yes (Triac Dimming - Trailing Edge)
IP Rating:	Indoor
Class Certifications:	Class 2 Class P Type HL
Dimensions:	88mm x 38mm x 21mm
Wiring/Housing:	Hardwire
Operating Temperature:	-20°C~+40°C
Standards:	CE/ETL/RoHS

Job Name: _____

Distributor: _____

Type: _____

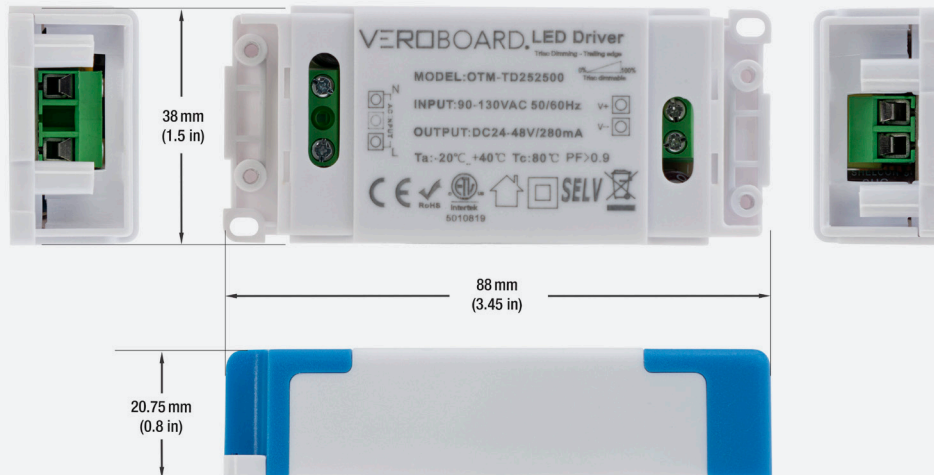

24-48V DC
12W
CLASS 2

Disclaimer:

The data and information contained in this specification sheet are subject to change without notice; the ratings supplied are provided based on the product manufacturer. The information contained in this specification sheet should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. In no event shall Veroboard be liable for any incidental or consequential damages resulting from the use, misuse, or inability to use the product. This exclusion applies regardless of whether such damages are sought based on breach of warranty, breach of contract, negligence, strict liability in tort, or any other legal theory.

SKU: 666561426408