

**PRODUCT
CATALOG
2024**

VEROBOARD®

CANADIAN-BASED LIGHTING MANUFACTURER

LED DOWNLIGHTS

**Gimbal
Recessed
Flat Panel
Trimless
Regressed**

Veroboards' downlights are selectively designed to provide modern lighting solutions for any architectural style. All our downlights are dimmable. Moreover, Correlated Color Temperature (5CCT) switch and power supply are included with selected models.



3.5"-1 Head Regressed Gimbal

12v

Model No.:	AD-35S12W-1224V-5CCTWH-REY-SQ
Voltage:	12-24V AC/DC
Wattage:	12W
Color Temperature:	5CCT Selectable Color Temperature (2700K-3000K-3500K-4000K-5000K)
Brightness:	800 Lumens
Beam Angle:	40°
Dimmable:	No
Rendering Index:	CRI>90
LED Type:	Integrated COB LED
LED Driver:	IC Rated
Outer Dimensions:	111.40mm x 111.40mm x 77.66mm (4.4" x 4.4" x 3")
IP Rating:	IP20 (Suitable for damp location)



LED Driver Dimensions:
 Length: 67.76mm (2.67")
 Width: 25.40mm (1")
 Depth: 25.40mm (1")



FT6 RATED CABLE



15° TILT



Selectable Color Temperature Switch

SKU: 666561430382

3.5"-1 Head Regressed Gimbal

120V

Model No.:	AD-35S12W-5CCTWH-REY-SQ
Voltage:	120V AC
Wattage:	12W
Color Temperature:	5CCT Selectable Color Temperature (2700K-3000K-3500K-4000K-5000K)
Brightness:	800 Lumens
Beam Angle:	40°
Dimmable:	Yes
Rendering Index:	CRI>90
LED Type:	Integrated COB LED
LED Driver:	IC Rated
Outer Dimensions:	111.40mm x 111.40mm x 77.66mm (4.4" x 4.4" x 3")
IP Rating:	IP20 (Suitable for damp location)



LED Driver Dimensions:
 Length: 85mm (3.35")
 Width: 85mm (3.35")
 Depth: 32mm (1.25")



FT6 RATED CABLE



15° TILT



Selectable Color Temperature Switch

SKU: 666561425166

4" Round Floating Gimbal

12v

Model No.:	LED-4-S9W-1224V-5CCTWH-EFG
Voltage:	12-24V AC/DC
Wattage:	9W
Color Temperature:	5CCT Selectable Color Temperature (2700K-3000K-3500K-4000K-5000K)
Brightness:	700 Lumens
Beam Angle:	38°
Dimmable:	No
Rendering Index:	CRI>90
LED Type:	Integrated COB LED
LED Driver:	IC Rated
Outer Dimensions:	Ø125.24mm (4.93") x Depth 38mm (1.5")
IP Rating:	IP20 (Suitable for damp location)



LED Driver Dimensions:
 Length: 67.76mm (2.67")
 Width: 25.40mm (1")
 Depth: 25.40mm (1")



FT6 RATED CABLE



90° TILT

360°



Selectable Color Temperature Switch

9W = 50W
 Uses only 9W of LED power 50W Incandescent Equivalent

SKU: 666561432263

VEROBOARD DOWNLIGHTS

4" Round Floating Gimbal



Model No.:	LED-4-S9W-5CCTWH-EFG
Voltage:	120V AC
Wattage:	9W
Color Temperature:	5CCT Selectable Color Temperature (2700K-3000K-3500K-4000K-5000K)
Brightness:	700 Lumens
Beam Angle:	38°
Dimmable:	Yes
Rendering Index:	CRI>90
LED Type:	Integrated COB LED
LED Driver:	IC Rated
Outer Dimensions:	Ø125.24mm (4.93") x Depth 38mm (1.5")
IP Rating:	IP20 (Suitable for damp location)



LED Driver Dimensions:
 Length: 90mm (3.5")
 Width: 78mm (3.08")
 Depth: 36mm (1.4")



9W = 50W
 Uses only 9W of LED
 power 50W Incandescent Equivalent



Selectable
Color Temperature
Switch

SKU: 666561425159

2" Mini LED Recessed Gimbal



Model No.:	AD-LED-2-S5W-5CCTWH-EY
Voltage:	120V AC
Wattage:	5W
Color Temperature:	5CCT Selectable Color Temperature (2700K-3000K-3500K-4000K-5000K)
Brightness:	400 Lumens
Beam Angle:	40°
Dimmable:	Yes
Rendering Index:	CRI>90
LED Type:	Integrated COB LED
LED Driver:	IC Rated
Outer Dimensions:	Ø65.31mm (2.57") x Depth 35mm (1.37")
IP Rating:	IP20 (Suitable for damp location)



LED Driver Dimensions:
 Diameter: 51.75mm (2.0")
 Length: 100.50mm (4.0")



Selectable
Color Temperature
Switch

SKU: 666561425142

4" Gimbal Adjustable Downlight Canless 12v

Model No.:	AD-LED-4-S12W-1224V-5CCTWH-EY
Voltage:	12-24V AC/DC
Wattage:	12W
Color Temperature:	5CCT Selectable Color Temperature (2700K-3000K-3500K-4000K-5000K)
Brightness:	1000 Lumens
Beam Angle:	40°
Dimmable:	No
Rendering Index:	CRI>90
LED Type:	Integrated COB LED
LED Driver:	IC Rated
Outer Dimensions:	Ø125mm (4.9") x Depth 50.50mm (2")
IP Rating:	IP20 (Suitable for damp location)



LED Driver Dimensions:
 Length: 67.76mm (2.67")
 Width: 25.40mm (1")
 Depth: 25.40mm (1")



Selectable
Color Temperature
Switch

SKU: 666561430375

VEROBOARD DOWNLIGHTS

4" Gimbal Adjustable Downlight Canless



Model No.:	AD-LED-4-S12W-5CCTWH-EY
Voltage:	120V AC
Wattage:	12W
Color Temperature:	5CCT Selectable Color Temperature (2700K-3000K-3500K-4000K-5000K)
Brightness:	1000 Lumens
Beam Angle:	40°
Dimmable:	Yes
Rendering Index:	CRI>90
LED Type:	Integrated COB LED
LED Driver:	IC Rated
Outer Dimensions:	Ø125mm (4.9") x Depth 50.50mm (2")
IP Rating:	IP20 (Suitable for damp location)



LED Driver Dimensions:
 Length: 90mm (3.5")
 Width: 80mm (3.15")
 Depth: 35.50mm (1.4")



Selectable
Color Temperature
Switch

SKU: 666561425135

4" Gimbal Adjustable Ceiling Light



Model No.:	EW34CG
Voltage:	100-130V AC
Wattage:	8W
Color Temperature:	5CCT Selectable Color Temperature (2700K-3000K-3500K-4000K-5000K)
Brightness:	800 Lumens
Beam Angle:	40°
Dimmable:	Yes
Rendering Index:	CRI>90
LED Type:	Integrated COB LED
LED Driver:	IC Rated
Outer Dimensions:	Ø120mm (4.75") x Depth 55mm (2.16")
IP Rating:	IP20 (Suitable for damp location)



LED Driver Dimensions:
 Length: 110mm (4.3")
 Width: 55mm (2.3")
 Depth: 35mm (1.3")



Selectable
Color Temperature
Switch

SKU: 666561429027

2" Round Regressed Downlight



Model No.:	LED-2-S12W-5CCTWH
Voltage:	120V AC
Wattage:	12W
Color Temperature:	5CCT Selectable Color Temperature (2700K-3000K-3500K-4000K-5000K)
Brightness:	800 Lumens
Available Colors:	White and Black*
Dimmable:	Yes
Rendering Index:	CRI>90
LED Type:	Integrated COB LED
LED Driver:	IC Rated
Outer Dimensions:	Ø79.3mm (3.1") x Depth 107.64mm (4.24")
IP Rating:	IP20 (Suitable for damp location)



LED Driver Dimensions:
 Length: 96.75mm (3.8")
 Width: 58.3mm (2.3")
 Depth: 38.5mm (1.5")




Selectable
Color Temperature
Switch

*Black trim ring and cone sold separately.
(SKU: 666561425128)

SKU: 666561425111

4" Multiple Application Recessed Downlight

Model No.:	LED-S8W-5CCTWH-MT
Voltage:	120V AC
Wattage:	8W
Color Temperature:	5CCT Selectable Color Temperature (2700K-3000K-3500K-4000K-5000K)
Brightness:	500 Lumens
Beam Angle:	120°
Dimmable:	Yes 
Rendering Index:	CRI>90
Available Trims:	White, Black, Brushed Nickel*
Outer Dimensions:	Ø124.88mm (3.56") x Depth 24.5mm (1.25")
IP Rating:	IP65 (Suitable for wet location)



SKU: 666561425067

SKU: 666561425074

SKU: 666561425050



*Black and brushed nickel trims sold separately.




Selectable
Color Temperature
Switch

SKU: 666561425050

4" Trimless Downlight



Model No.:	LED-4-S15W-L5CCTWH-T
Voltage:	120V AC
Wattage:	15W
Color Temperature:	5CCT Selectable Color Temperature (2700K-3000K-3500K-4000K-5000K)
Brightness:	1000 Lumens
Dimmable:	Yes 
Rendering Index:	CRI>90
LED Type:	Integrated COB LED
LED Driver:	IC Rated
Outer Dimensions:	Ø89.76mm (3.5") x Depth 79mm (3.1")
IP Rating:	Suitable for wet location



LED Driver Dimensions:

Length: 95mm (3.75")

Width: 59mm (2.34")

Depth: 39mm (1.56")

FT6
RATED
CABLE



Selectable
Color Temperature
Switch

SKU: 666561425708

3.5" Trimless Downlight



Model No.:	LED-35-S12W-L5CCTWH-T
Voltage:	120V AC
Wattage:	12W
Color Temperature:	5CCT Selectable Color Temperature (2700K-3000K-3500K-4000K-5000K)
Brightness:	800 Lumens
Dimmable:	Yes 
Rendering Index:	CRI>90
LED Type:	Integrated COB LED
LED Driver:	IC Rated
Outer Dimensions:	Ø76mm (3") x Depth 74mm (2.9")
IP Rating:	Suitable for wet location



LED Driver Dimensions:

Length: 95mm (3.75")

Width: 59mm (2.34")

Depth: 39mm (1.56")



FT6
RATED
CABLE



Selectable
Color Temperature
Switch

SKU: 666561425173

VEROBOARD DOWNLIGHTS

3" Trimless Gimbal



Model No.:	LED-3-S8W-L5CCTWH-T
Voltage:	120V AC
Wattage:	8W
Color Temperature:	5CCT Selectable Color Temperature (2700K-3000K-3500K-4000K-5000K)
Brightness:	600 Lumens
Dimmable:	Yes
Rendering Index:	CRI>90
LED Type:	Integrated COB LED
LED Driver:	IC Rated
Outer Dimensions:	Ø75mm (2.95") Depth: 63.12mm (2.48")
IP Rating:	Suitable for wet location



LED Driver Dimensions:
Diameter: 52mm (2.0")
Length: 103mm (4.0")



FT6 RATED CABLE



Selectable Color Temperature Switch

SKU: 666561425692

2" Trimless Downlight



Model No.:	LED-2-S8W-L5CCTWH-T
Voltage:	120V AC
Wattage:	8W
Color Temperature:	5CCT Selectable Color Temperature (2700K-3000K-3500K-4000K-5000K)
Brightness:	600 Lumens
Dimmable:	Yes
Rendering Index:	CRI>90
LED Type:	Integrated COB LED
LED Driver:	IC Rated
Outer Dimensions:	Ø63mm (2.48") Depth 61.82mm (2.43")
IP Rating:	Suitable for wet location



LED Driver Dimensions:
Diameter: 52mm (2.0")
Length: 103mm (4.0")



FT6 RATED CABLE



Selectable Color Temperature Switch

SKU: 666561425685

2" Mini LED IC Rated Recessed Downlight



Model No.:	LED-1-S6W-3KWH-12V
Voltage:	12V AC/DC
Wattage:	6W
Color Temperature:	3000K (Warm White)
Brightness:	480 Lumens
Beam Angle:	40°
Dimmable:	Yes
Rendering Index:	CRI>90
LED Type:	Integrated COB LED
IC Rated:	Yes
Outer Dimensions:	Ø57mm (2.25") Depth 73.3mm (2.89")
IP Rating:	IP20 (Suitable for damp location)




SKU: 666561425036

2" Mini LED IC Rated Recessed Downlight




Model No.:	LED-1-S6W-3KWH-12V-SQ
Voltage:	12V AC/DC
Wattage:	6W
Color Temperature:	3000K (Warm White)
Brightness:	480 Lumens
Beam Angle:	40°
Dimmable:	Yes
Rendering Index:	CRI>90
LED Type:	Integrated COB LED
IC Rated:	Yes
Outer Dimensions:	57x 57mm (2.25 x 2.25") Depth 73.3mm (2.89")
IP Rating:	IP20 (Suitable for damp location)



SKU: 666561425043

4" Recessed Ceiling Light

Model No.:	LED-S12W-5CCTKWH-SQ
Voltage:	120V AC
Wattage:	12W
Frequency:	60Hz
Power Factor (PF):	0.9
Brightness:	800 Lumens
Color Temperature:	5CCT Selectable Color Temperature (2700K-3000K-3500K-4000K-5000K)
Rendering Index:	CRI>90
LED Driver:	IC Rated
Dimmable:	Yes 
Available Trim Colors:	Black, Brush Nickel, Black Nickel (Sold Separately)
Dimensions:	120mm x 120mm (4.7" x 4.7") Depth 32mm (1.25")
IP Rating:	IP20 (Damp Locations)



LED Driver Dimensions:
Length: 87mm (3.4")
Width: 87mm (3.4")
Depth: 33mm (1.29")



Additional trims are available for purchase separately.



Brushed Nickel
SKU: 666561418038

Black
SKU: 666561418021

Black Nickel
SKU: 666561418045


SKU: 666561432232



Selectable Color Temperature Switch




4" Flat LED Panel Light

Model No.:	Z4C-9
Input Voltage:	120V AC
Wattage:	9W
Frequency:	50/60Hz
Color Temperature:	5CCT Selectable Color Temperature (3000K-4000K-5000K)
Ava. Trim Color:	Black, Brushed Nickel
Brightness:	589-673 Lumens
Beam Angle:	110°
Dimmable:	Yes 
Rendering Index:	CRI>90
IC Rated:	Typ IC Rated
Outer Dimensions:	Ø120mm (4.72") x Depth 22.64mm (0.9")
IP Rating:	Suitable for damp location



LED Driver Dimensions:
Length: 112mm (4.4")
Width: 60mm (2.37")
Depth: 35mm (1.37")

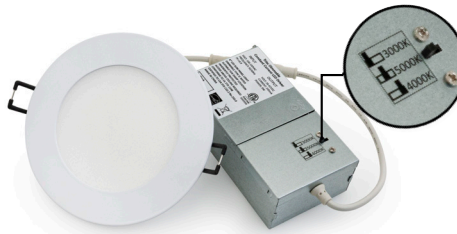

Selectable Color Temperature Switch



Available Trim Colour (Sold Separately)

BLACK SKU: 666561415242

BRUSHED NICKEL SKU: 666561415259

SKU: 666561415228

6" Round Downlight LED Panel

Model No.:	LED-6-S12W-1224V-5CCTWH
Voltage:	12-24V AC/DC
Wattage:	12W
Frequency:	60Hz
Power Factor (PF):	0.9
Color Temperature:	5CCT Selectable Color Temperature (2700K-3000K-3500K-4000K-5000K)
Brightness:	800 Lumens
Beam Angle:	120°
Dimmable:	No
Rendering Index:	CRI>90
LED Driver:	IC Rated
Outer Dimensions:	Ø175mm (6.88") x Depth 25mm (1")
Cut Size:	Ø158mm (6.25")
IP Rating:	IP65 (Suitable for dry, damp, wet locations)



LED Driver Dimensions:
Length: 67.76mm (2.67")
Width: 25.40mm (1")
Depth: 25.40mm (1")



Selectable Color Temperature Switch

SKU: 666561430368

VEROBOARD DOWNLIGHTS

6" Round Downlight LED Panel



Model No.:	LED-6-S12W-5CCTWH
Voltage:	120V AC
Wattage:	12W
Frequency:	60Hz
Power Factor (PF):	0.9
Color Temperature:	5CCT Selectable Color Temperature (2700K-3000K-3500K-4000K-5000K)
Brightness:	800 Lumens
Beam Angle:	120°
Dimmable:	Yes
Rendering Index:	CRI>90
LED Driver:	IC Rated
Outer Dimensions:	Ø175mm (6.88") x Depth 25mm (1")
Cut Size:	Ø158mm (6.25")
IP Rating:	IP65 (Suitable for dry, damp, wet locations)

LED Driver Dimensions:
 Length: 88.45mm (3.5")
 Width: 88mm (3.45")
 Depth: 32.5mm (1.28")



SKU: 666561418052

8" Round Surface Mount Downlight with Changeable Color Temperature (3CCT)



Model No.:	HM04-PR8-18W120-3CCT-WSA
Voltage:	120V AC (Line voltage)
Wattage:	18W
Color Temperature:	3000K (Warm White) • 4000K (Natural White) • 5000K (Daylight)
Brightness:	1260 Lumens
Beam Angle:	120°
Dimmable:	Yes (Leviton and lutron dimmers)
Rendering Index:	CRI>80
IC Rated:	Yes
Outer Dimensions:	Ø218mm (8.56") x Depth 16mm (0.63")
IP Rating:	IP20 (Suitable for dry and damp location)

Selectable
Color Temperature Switch



SKU: 666561420345

11" Round Surface Mount Downlight with Changeable Color Temperature (3CCT)



Model No.:	HM04-PR12-24W120-3CCT-WSA
Voltage:	120V AC (Line voltage)
Wattage:	18W
Color Temperature:	3000K (Warm White) • 4000K (Natural White) • 5000K (Daylight)
Brightness:	1680 Lumens
Beam Angle:	120°
Dimmable:	Yes (Leviton and lutron dimmers)
Rendering Index:	CRI>80
IC Rated:	Yes
Outer Dimensions:	Ø292mm (11.5") x Depth 16mm (0.63")
IP Rating:	IP20 (Suitable for dry and damp location)


Selectable
Color Temperature Switch



SKU: 666561420338

2" Round Ceiling Light (Black)

12v

Model No.:	RD24-3W-30K-BK
Voltage:	12V DC
Wattage:	3W
Color Temperature:	3000K (Warm White)
Fixture Colour:	Black
Dimmable:	Yes 
Tilt Angle:	30°
Cut Size:	42mm (1.7")
Location Approved:	Suitable for damp location



Dimensions:
 Diameter: Ø52mm (2.1")
 Depth: 44mm (1.8")

3000K
12V
 3 Watt




30° TILT



SKU: 666561415617

2" Round Ceiling Light (White)

12v

Model No.:	RD24-3W-30K-WH
Voltage:	12V DC
Wattage:	3W
Color Temperature:	3000K (Warm White)
Fixture Colour:	White
Dimmable:	Yes 
Tilt Angle:	30°
Cut Size:	42mm (1.7")
Location Approved:	Suitable for damp location



Dimensions:
 Diameter: Ø52mm (2.1")
 Depth: 44mm (1.8")

3000K
12V
 3 Watt




30° TILT



SKU: 666561415631

2" Round Ceiling Light (Brushed Nickel)

12v

Model No.:	RD24-3W-30K-BN
Voltage:	12V DC
Wattage:	3W
Color Temperature:	3000K (Warm White)
Fixture Colour:	Brushed Nickel
Dimmable:	Yes 
Tilt Angle:	30°
Cut Size:	42mm (1.7")
Location Approved:	Suitable for damp location



Dimensions:
 Diameter: Ø52mm (2.1")
 Depth: 44mm (1.8")

3000K
12V
 3 Watt




30° TILT



SKU: 666561415624

2" Round Ceiling Light (Brushed Nickel)

12v

Model No.:	RD24-3W-RGB-BN
Voltage:	12V DC
Wattage:	3W
Color Temperature:	RGB
Fixture Colour:	Brushed Nickel
Dimmable:	Yes 
Tilt Angle:	30°
Cut Size:	42mm (1.7")
Location Approved:	Suitable for damp location



Dimensions:
 Diameter: Ø52mm (2.1")
 Depth: 44mm (1.8")


12V
 3 Watt



30° TILT



SKU: 666561415648



4" LED Commercial Ceiling Light with Square Reflector Trim

Model No.:	VBD-COM-4-3K-4S VBD-COM-4-4K-4S VBD-COM-4-5K-4S
Voltage:	120-347V AC
Wattage:	20W
Frequency:	50-60Hz
Input Current:	0.2A
Color Temperature:	3000K (Warm White) • 4000K (Natural White) • 5000K (Daylight)
Brightness:	1560 Lumens
Beam Angle:	75°
Dimmable:	Yes (0-10 Dimming)
Trim Type:	Open reflector trim
Dimensions (Reflector):	162mm x 162mm (6.37" x 6.37") Depth 162mm (6.37")
Dimensions (Cut Size):	Ø131.25mm (5.16")

PACKAGE CONTENT:
- J Box structured engine
- Reflector trim



SKU: 666561419943


4" LED Commercial Ceiling Light with Sloped Square Reflector Trim

Model No.:	VBD-COM-4-3K-4SLS VBD-COM-4-4K-4SLS VBD-COM-4-5K-4SLS
Voltage:	120-347V AC
Wattage:	20W
Frequency:	50-60Hz
Input Current:	0.2A
Color Temperature:	3000K (Warm White) • 4000K (Natural White) • 5000K (Daylight)
Brightness:	1465 Lumens
Beam Angle:	80°
Dimmable:	Yes (0-10 Dimming)
Trim Type:	Open reflector trim
Dimensions (Reflector):	162mm x 162mm (6.37" x 6.37") Depth 158.75mm (6.25")
Dimensions (Cut Size):	Ø132.3mm (5.2")

PACKAGE CONTENT:
- J Box structured engine
- Reflector trim



SKU: 666561419967

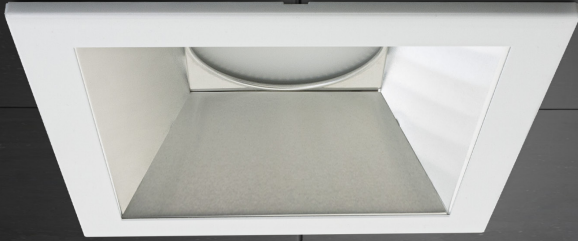

6" LED Commercial Ceiling Light with Square Reflector Trim

Model No.:	VBD-COM-6-3K-6S VBD-COM-6-4K-6S VBD-COM-6-5K-6S
Voltage:	120-347V AC
Wattage:	20W
Frequency:	50-60Hz
Input Current:	0.2A
Color Temperature:	3000K (Warm White) • 4000K (Natural White) • 5000K (Daylight)
Brightness:	1585 Lumens
Beam Angle:	80°
Dimmable:	Yes (0-10 Dimming)
Trim Type:	Open reflector trim
Dimensions (Reflector):	189mm x 189mm (7.43" x 7.43") Depth 133.35mm (5.25")
Dimensions (Cut Size):	Ø152.92mm (6")

PACKAGE CONTENT:

- J Box structured engine
- Reflector trim



SKU: 666561419950



6" LED Commercial Ceiling Light with Sloped Square Reflector Trim

Model No.:	VBD-COM-6-3K-6SLS VBD-COM-6-4K-6SLS VBD-COM-6-5K-6SLS
Voltage:	120-347V AC
Wattage:	20W
Frequency:	50-60Hz
Input Current:	0.2A
Color Temperature:	3000K (Warm White) • 4000K (Natural White) • 5000K (Daylight)
Brightness:	1570 Lumens
Beam Angle:	70°
Dimmable:	Yes (0-10 Dimming)
Trim Type:	Open reflector trim
Dimensions (Reflector):	189mm x 189mm (7.43" x 7.43") Depth 177.8mm (7")
Dimensions (Cut Size):	Ø154.5mm (6")

PACKAGE CONTENT:

- J Box structured engine
- Reflector trim



SKU: 666561419974



6" LED Commercial Ceiling Light with Round Reflector Trim

Model No.:	VBD-COM-6-3K-6R VBD-COM-6-4K-6R VBD-COM-6-5K-6R
Voltage:	120-347V AC
Wattage:	20W
Frequency:	50-60Hz
Input Current:	0.2A
Color Temperature:	3000K (Warm White) • 4000K (Natural White) • 5000K (Daylight)
Brightness:	1560 Lumens
Beam Angle:	60°
Dimmable:	Yes (0-10 Dimming)
Trim Type:	Open reflector trim
Dimensions (Reflector):	Ø194mm (7.62") Depth 133.35mm (5.25")
Dimensions (Cut Size):	Ø150mm (5.6")

PACKAGE CONTENT:

- J Box structured engine
- Reflector trim



SKU: 666561415914



4" LED Commercial Ceiling Light with Sloped Round Reflector Trim

Model No.:	VBD-COM-4-3K-4SLR VBD-COM-4-4K-4SLR VBD-COM-4-5K-4SLR
Voltage:	120-347V AC
Wattage:	20W
Frequency:	50-60Hz
Input Current:	0.2A
Color Temperature:	3000K (Warm White) • 4000K (Natural White) • 5000K (Daylight)
Brightness:	1530 Lumens
Beam Angle:	80°
Dimmable:	Yes (0-10 Dimming)
Trim Type:	Open reflector trim
Dimensions (Reflector):	Ø162mm (6.3") Depth 158.75mm (6.25")
Dimensions (Cut Size):	Ø132.9mm (5.23")

PACKAGE CONTENT:

- J Box structured engine
- Reflector trim



SKU: 666561419929



8" LED Commercial Ceiling Light with Round Reflector Trim

Model No.:	VBD-COM-8-3K-8R VBD-COM-8-4K-8R VBD-COM-8-5K-8R
Voltage:	120-347V AC
Wattage:	20W
Frequency:	50-60Hz
Input Current:	0.2A
Color Temperature:	3000K (Warm White) • 4000K (Natural White) • 5000K (Daylight)
Brightness:	1625 Lumens
Beam Angle:	70°
Dimmable:	Yes (0-10 Dimming)
Trim Type:	Open reflector trim
Dimensions (Reflector):	Ø233.36mm (9.18") Depth 150mm (5.87")
Dimensions (Cut Size):	Ø190.5mm (7.5")

PACKAGE CONTENT:

- J Box structured engine
- Reflector trim



SKU: 666561415921



6" LED Commercial Ceiling Light with Sloped Round Reflector Trim

Model No.:	VBD-COM-6-3K-6SLR VBD-COM-6-4K-6SLR VBD-COM-6-5K-6SLR
Voltage:	120-347V AC
Wattage:	20W
Frequency:	50-60Hz
Input Current:	0.2A
Color Temperature:	3000K (Warm White) • 4000K (Natural White) • 5000K (Daylight)
Brightness:	1650 Lumens
Beam Angle:	65°
Dimmable:	Yes (0-10 Dimming)
Trim Type:	Open reflector trim
Dimensions (Reflector):	Ø193.6mm (7.6") Depth 171.45mm (6.75")
Dimensions (Cut Size):	Ø146mm (5.75")

PACKAGE CONTENT:

- J Box structured engine
- Reflector trim



SKU: 666561419936