

VEROBOARD®


LED Type: VBDFS-COB896W6.6-RGB27-24WP
Color: RGB+2700K (Soft White)



DESCRIPTION

Flexible 14mm wide linear LED strip. Available in 5 meter (16.4') rolls that can be cut every 1.25". The LED Strip lights are manufactured with high-quality materials and designed for professional lighting. Every strip light begins with a heavyduty dual-core copper printed circuit board (PC Board), which is then soldered with an array of chips and color options. Moreover, the strip lights come with a strong 3M adhesive backing. They can be cut to any size (marked interval points) and rejoined by soldering. The RGB27 COB LED Strips can work with LED Controllers to adjust the static shade or dynamic settings, you can readjust the rate of dynamic setting or the illumination of fixed color.

DIMENSIONS

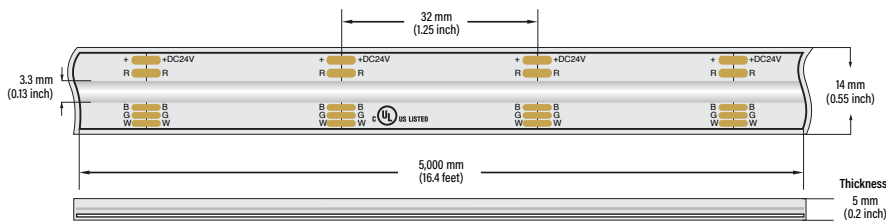

SPECIFICATIONS

Model:	VBDFS-COB896W6.6-RGB27-24WP
Color Temperature:	RGB+2700K (Soft White)
LED Type:	COB
LED Qty:	896 LEDs per meter
Input Voltage (VF):	24V DC
Power:	20W per meter (6.6W/ft)
Lifespan:	>50,000 hours
PCB:	3oz PCB, Double-side
IP Rating:	IP67 (Suitable for wet locations)
Rendering Index (Ra):	CRI>95
Beam Angle:	120°
Dimmable:	Yes
Cut Size:	Every 1.25"
Operating Temperature:	-20°C to +40°C
Dimensions:	5,000 x 14 x 5mm (196.8" x 0.55" x 0.2")
Certificates:	UL / RoHs
Roll Length:	5 meter roll (16.4ft)

Job Name: _____


Distributor: _____

Type: _____

	Wattage
Per Foot	6.6W/ft
Per Meter	20W/m




666561433888

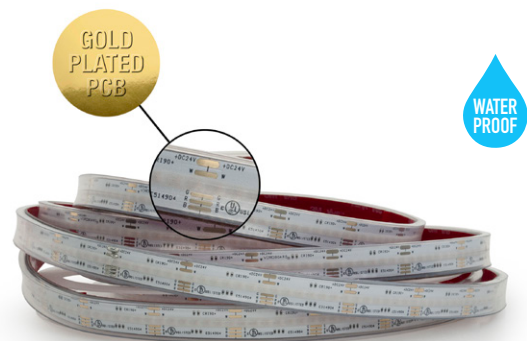

SILICONE HOLDERS
A pack of 10 Pcs silicon holders with screws, is included.

ORDERING GUIDE

Example part number: **VBDFS - COB896W6.6 - RGB27 - 24 - WP**

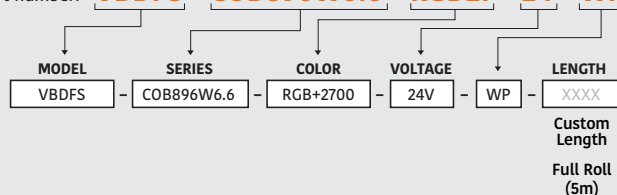

For more information about our products and services, please visit our website: www.veroboard.com

[veroboard.com](http://www.veroboard.com)

CONTROLLERS (Sold Separately)



Model: RC03RFB-RGBWCCT-4Z
SKU: 666561435110



Model: RC05RFB-RGBWCCT-8Z
SKU: 666561435127



Model: VBD-MI-4Z-B3
SKU: 666561412913

COMPATIBLE RECEIVER (Sold Separately)



Model: CX-W01-P4-12A-RGBW
SKU: 666561435073

Scan the QR code with your smartphone to view the complete selection of controllers and remote controls.



Disclaimer:

The data and information contained in this specification sheet are subject to change without notice; the ratings supplied are provided based on the product manufacturer. The information contained in this specification sheet should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. In no event shall Veroboard be liable for any incidental or consequential damages resulting from the use, misuse, or inability to use the product. This exclusion applies regardless of whether such damages are sought based on breach of warranty, breach of contract, negligence, strict liability in tort, or any other legal theory.

CUSTOM ORDERING GUIDE ✂

Single Run (Straight Run): The below ordering guide will be used for single run LED strip.


- **PFL:** Power Feed Length
- **SL:** Strip Length




CUSTOM ORDERING GUIDE ✂

Joiner: LED strip lights need joiners if they are used for curve applications such as corner side, behind a mirror, etc.

- **PFL:** Power Feed Length
- **SL:** Strip Length
- **JL:** Joiner Length

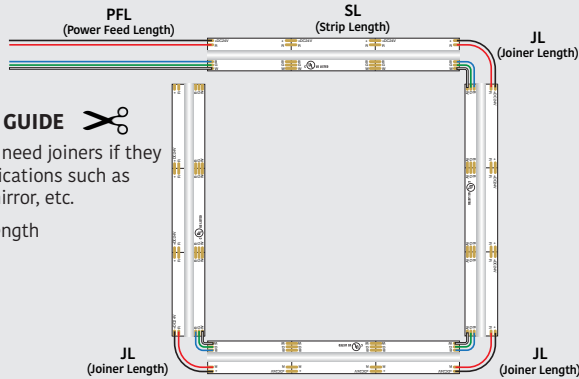










Note: Joiners will be 1-inch size unless customers require a specific size.

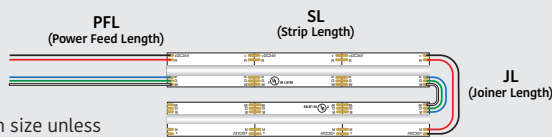

RECOMMENDED LED ALUMINUM CHANNELS

(Sold Separately)

VBD-CH-S6	VBD-CH-R2	VBD-CH-R2B
SKU: 666561423315	SKU: 666561423742	SKU: 666561428280
VBD-CH-RF4	VBD-CH-C1	VBD-CH-C2
SKU: 666561423377	SKU: 666561423490	SKU: 666561423506
VBD-CH-C2B	VBD-CH-C3	VBD-CH-C3B
SKU: 666561423513	SKU: 666561423520	SKU: 666561423537
VBD-CH-C4	VBD-CH-C4B	VBD-CH-WC1
SKU: 666561423544	SKU: 666561423551	SKU: 666561423599
VBD-CH-RF3	VBD-CH-RF5	VBD-CH-WC2
SKU: 666561423360	SKU: 666561423384	SKU: 666561423605

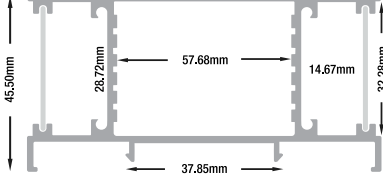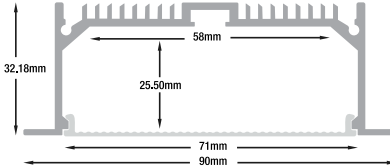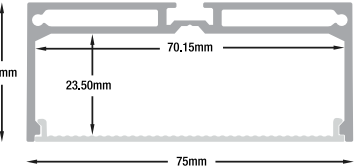VBD-CH-WC3	VBD-CH-WC4	VBD-CH-RF6	VBD-CH-RF7	
				
SKU: 666561423612	SKU: 666561423629	SKU: 666561423391	SKU: 666561423407	
VBD-CH-RF8	VBD-CH-S1	VBD-CH-R3	VBD-CH-RF10	VBD-CH-R1
				
SKU: 666561423414	SKU: 666561423247	SKU: 666561423759	SKU: 666561423438	SKU: 666561423735

For more information about our products and services, please visit our website: www.veroboard.com

VBD-CH-D1	VBD-CH-D5	VBD-CH-D8	VBD-CH-D9
SKU: 666561423643	SKU: 666561423681	SKU: 666561423711	SKU: 666561423728

RECOMMENDED LED POWER SUPPLIES (Sold Separately)

For more options and varieties, please visit our website: www.veroboard.com

Note: To avoid a dark spot on the sides of these channels (RF10, RF6, RF8, R3, S1, R3) we recommend installing more than one Run LED Strip.

For more details please contact us at: sales@veroboard.com

Constant Voltage Dimmable LED Drivers (5 in 1), Triac/Phase, 0-10V, 1-10V, Potentiometer, 10V PWM 5 in 1 Dimming



Model No.	Input Voltage	Output Voltage	Wattage	IP Rating	Class	Max. Strip Length	SKU#
VBD-024-030C2DM5i1	100-277V	24V	30W	IP67	Class 2	3.6ft	666561426033
VBD-024-060C2DM5i1	100-277V	24V	60W	IP67	Class 2	7.2ft	666561426040
VBD-024-080C2DM5i1	100-277V	24V	80W	IP67	Class 2	9.6ft	666561426088
VBD-024-096C2DM5i1	100-277V	24V	96W	IP67	Class 2	11.6ft	666561426057
VBD-024-192C2DM5i1	100-277V	24V	192W (2x96W)	IP67	Class 2	23.2ft	666561426064
VBD-024-200TR010	100-277V	24V	200W	IP65	Type HL	24.2ft	666561435912
VBD-024-288C2DM5i1	100-277V	24V	288W (3x96W)	IP67	Class 2	34.9ft	666561426071
VBD-024-300TR010	100-277V	24V	300W	IP65	Type HL	36.3ft	666561435929

Constant Voltage Triac LED Drivers forward Phase, Magnetic Low Voltage & Triac Dimmers



Model No.	Input Voltage	Output Voltage	Wattage	IP Rating	Class	Max. Strip Length	SKU#
VBD-024-024DM	100-130V	24V	24W	IP20	Class 2	2.9ft	666561415839
VBD-024-048DM	100-130V	24V	48W	IP20	Class 2	5.8ft	666561415822
VBD-024-060DM	100-130V	24V	60W	IP20	Class 2	7.2ft	666561415815
VBD-024-096DM	100-130V	24V	96W	IP67	Class 2	11.6ft	666561415808
VBD-024-150DM	100-130V	24V	150W	IP67	-	18.1ft	666561415792
VBD-024-200DM	100-130V	24V	200W	IP67	-	24.2ft	666561415785
VBD-024-300VTHWJ	100-277V	24V	300W	IP65	-	36.3ft	666561419806

DALI DIMMING CONSTANT VOLTAGE



Model No.	Input Voltage	Output Voltage	Wattage	IP Rating	Class	Max. Strip Length	SKU#
VBD-024-030DD	100-265V AC	24V	30W	IP20	Class 2	3.6ft	666561427306
VBD-024-060DD	100-265V AC	24V	60W	IP65	Class 2	7.2ft	666561427320
VBD-024-096DD	100-265V AC	24V	96W	IP65	Class 2	11.6ft	666561427344
VBD-024-150DD	100-265V AC	24V	150W	IP65	-----	18.1ft	666561427368
VBD-024-200DD	100-265V AC	24V	200W	IP65	-----	24.2ft	666561427375

PLUG-IN DRIVERS



Model No.	Input Voltage	Output Voltage	Wattage	IP Rating	Class	Max. Strip Length	SKU#
VBDA-024-024P1J	100-240V AC	24V	24W	IP20	Class 2	3ft	666561428969
VBDA-024-036P1J	100-240V AC	24V	36W	IP20	Class 2	4.3ft	666561428983
VBDA-024-060P1J	100-240V AC	24V	60W	IP20	Class 2	7.2ft	666561429003

For more information about our products and services, please visit our website: www.veroboard.com


Light Measurement Report

Print date: 2023-05-02

Measurement date and time: 2023-05-02 12:40:15 PM – Measurement no. VFR-230502-0197-MS

Luminous Intensity diagram

Unit: 0-100% of peak intensity

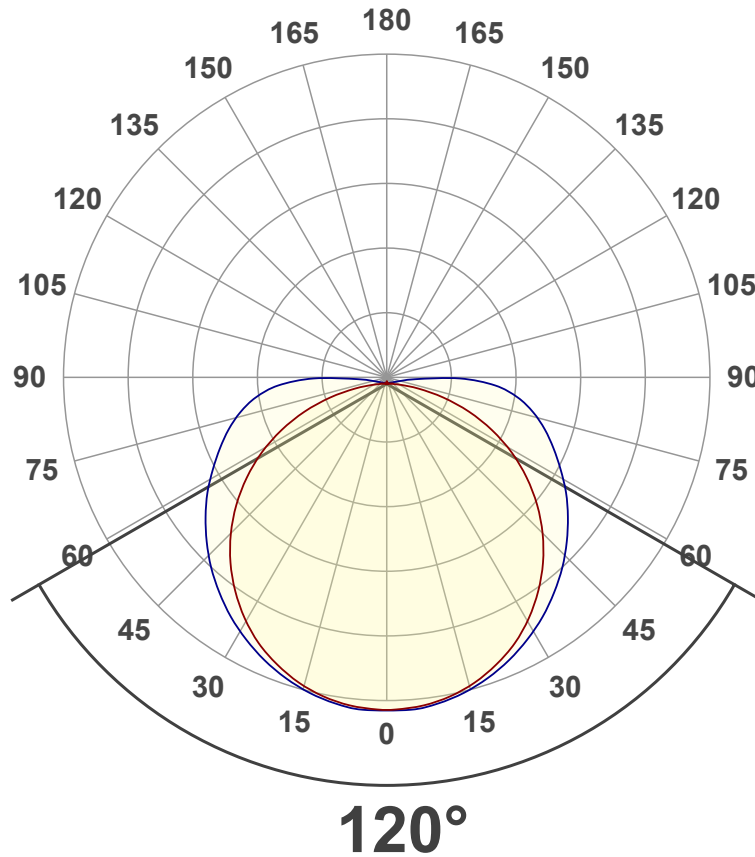

Main Values

Lumen Up% / Down%	3.87% / 96.13%
Peak Intensity	5.38 cd
Beam Angle (50%)	120°
Beam Angle (90%)	150.8°
Beam Angle (10%)	116.2°

Cut-off Angle

Average 2,5%	192.7°
--------------	--------

Field Angle


Average 10%	180.5°
-------------	--------

Intensity Ratio

In 120° cone	65.9%
In 90° cone	43.2%

C000-C180
C090-C270

Linear distribution diagram - Intensity (candela) vs γ-angle

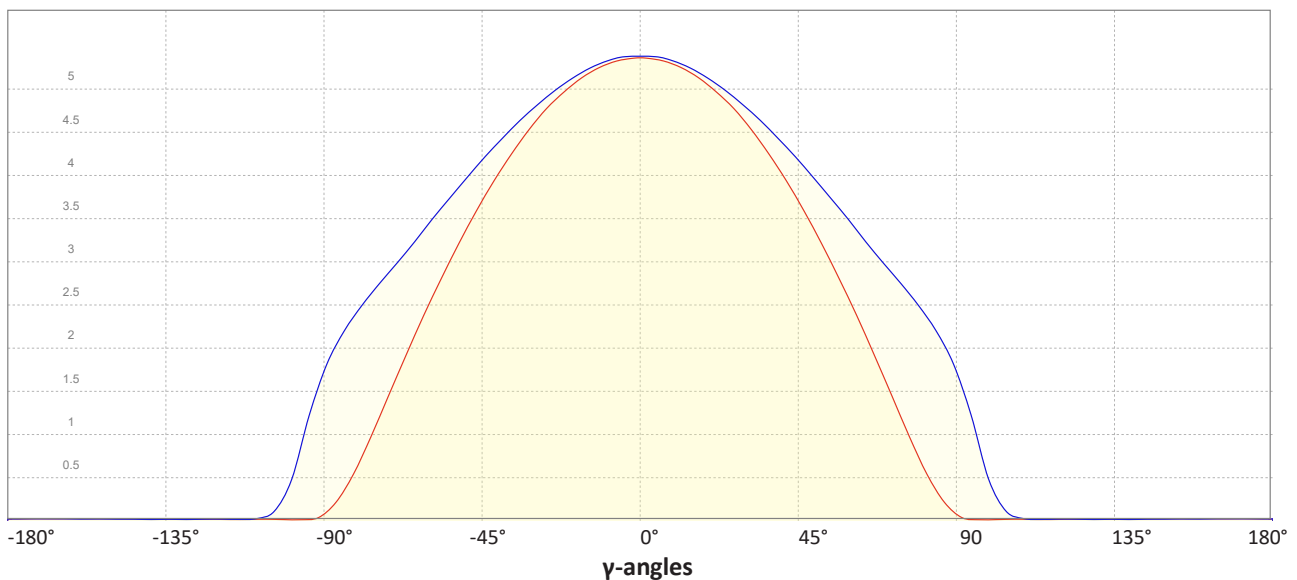

Light Measurement Report

Print date: 2023-05-02

Measurement date and time: 2023-05-02 12:40:15 PM – Measurement no. VFR-230502-0197-MS




Color details


Correlated Color Temperature, Target CCT = 2700 K
Correlated Color Temperature, Measured CCT = 2642 K
Color Rendering Index CRI 95.3
Color Rendering Index, R9 (red component) R9 = 74.6
Color Rendering TM30-18 R_f 91.6 – R_g 94.0
Color Quality Scale CQS = 82.9

MacAdam Steps
Color coordinates CIE 1931 (x;y) = (0.460;0.411)
Color coordinate CIEs 1960 (u';v') = (0.263;0.352)
Color deviation from BBL Duv = 0.0069
Color coordinate CIEs 1976 (CIELUV) (u';v') = (0.263;0.263)


CIE 1931

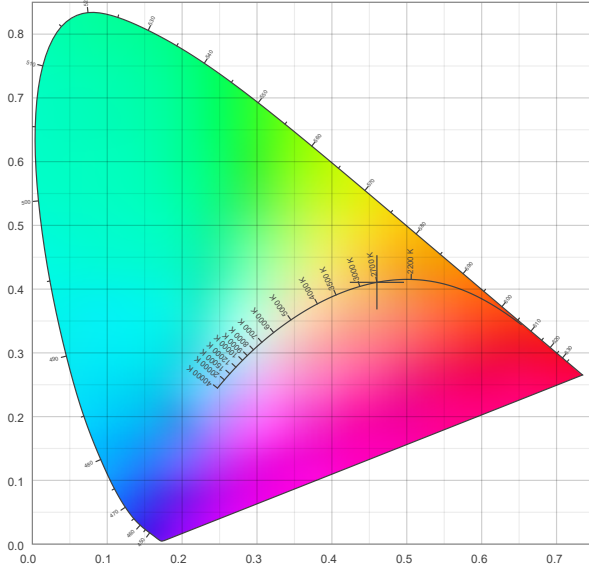

CIE 1931 – zoomed on Planckian locus

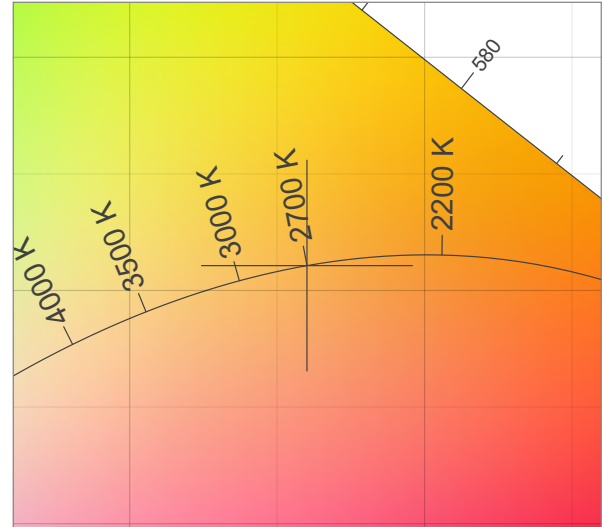


Color Rendering Index per reference color (CIE 1995)

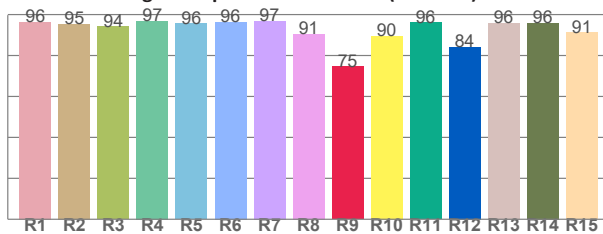


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
96.4	95.5	94.2	96.9	95.6	96.5	96.9	90.6	74.6	89.5	96.2	84.2	95.9	95.9	91.1

Spectral power distribution (SPD) / W/nm – 0-100%

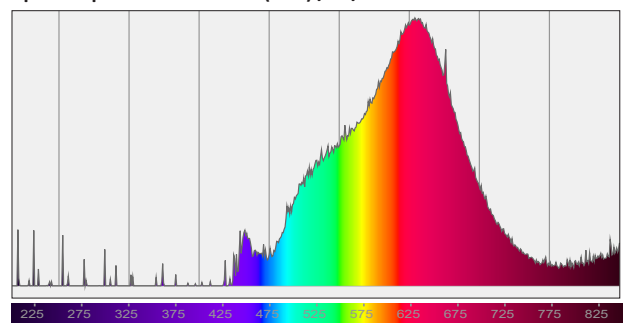


TM30-18 R_f -values per hue bin

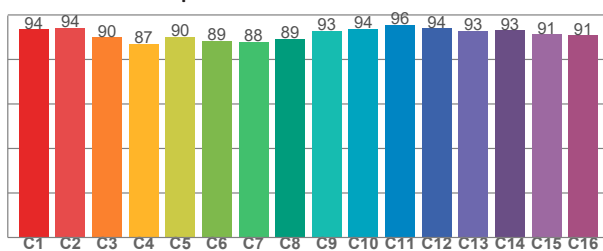

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
93.5	94.3	89.9	87.0	90.3	88.5	87.9	89.3	92.9	93.8	95.6	93.9	92.9	93.2	91.4	90.9

Color Quality Scale by reference color

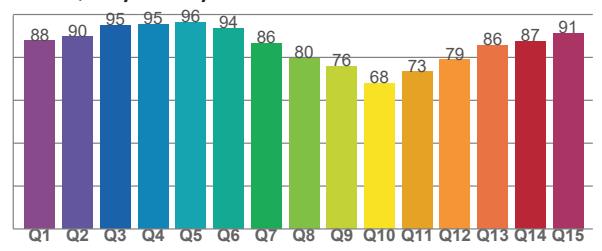

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
87.8	89.6	95.0	95.5	96.3	93.6	86.5	79.7	75.8	67.9	73.3	78.9	85.6	87.4	91.3

Light Measurement Report

Print date: 2023-05-02

Measurement date and time: 2023-05-02 12:40:15 PM – Measurement no. VFR-230502-0197-MS

Beam Details

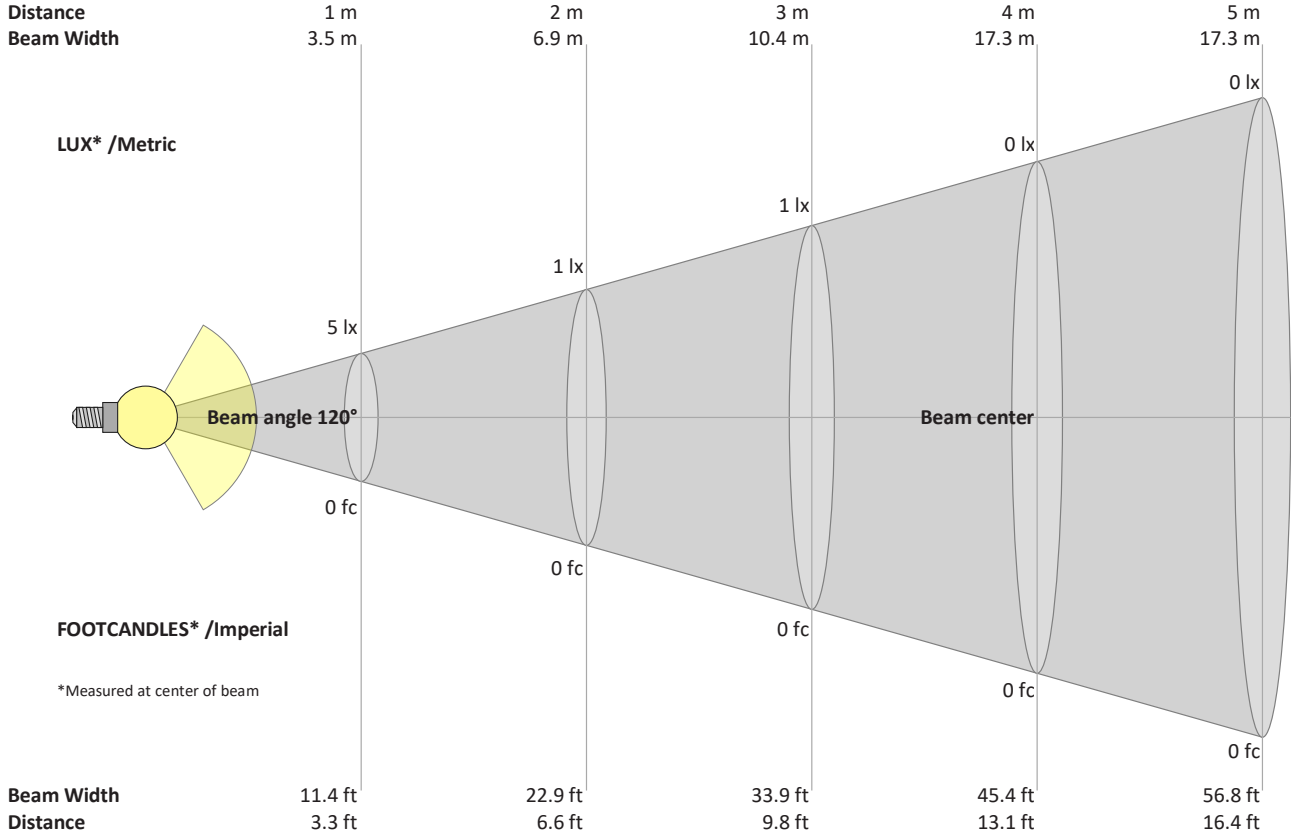

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
5	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	lux
0.5	0.1	0.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	fc

Intensities in 0° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
5.37	5.29	5.09	4.76	4.28	3.70	3.02	2.25	1.41	0.59	0.09	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	cd
100%	99%	95%	89%	80%	69%	56%	42%	26%	11%	2%	0%	0%	0%	0%	0%	0%	0%	0%	0%	of 0°val

Intensities in 90° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
5.37	5.33	5.16	4.89	4.56	4.18	3.75	3.29	2.85	2.39	1.72	0.51	0.05	0.02	0.02	0.02	0.02	0.02	0.02	0.02	cd
100%	99%	96%	91%	85%	78%	70%	61%	53%	45%	32%	9%	1%	0%	0%	0%	0%	0%	0%	0%	of 0°val

Intensities in 180° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
5.37	5.29	5.09	4.76	4.28	3.70	3.02	2.25	1.41	0.59	0.09	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	cd
100%	99%	95%	89%	80%	69%	56%	42%	26%	11%	2%	0%	0%	0%	0%	0%	0%	0%	0%	0%	of 0°val

Intensities in 270° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
5.37	5.33	5.16	4.89	4.56	4.18	3.75	3.29	2.85	2.39	1.72	0.51	0.05	0.02	0.02	0.02	0.02	0.02	0.02	0.02	cd
100%	99%	96%	91%	85%	78%	70%	61%	53%	45%	32%	9%	1%	0%	0%	0%	0%	0%	0%	0%	of 0°val