



## POWER & EFFICIENCY

20"

24"

INPUT POWER OPTIONS AC 1PH 200-240V 50/60Hz | AC 3PH 200-240V 50/60Hz | AC 3PH 380-480V 50/60Hz

CURRENT AT MAX SPEED (Amp) 3.53 A | 1.73 A | 1.48 A 2.9 A | 1.51 A | 1.31 A

POWER (hp) 0.9 HP BLDC Motor 0.9 HP BLDC Motor


MAXIMUM SPEED (RPM) MAX 76 RPM 61 RPM

AFFECTED AREA 105 ft Dia | 11,000 sqft 115 ft Dia | 13,000 sqft

## DIMENSIONS & WEIGHT

FAN DIAMETER 20 ft 24 ft

FAN WEIGHT 141 lbs (64 kg) 150 lbs (68 kg)

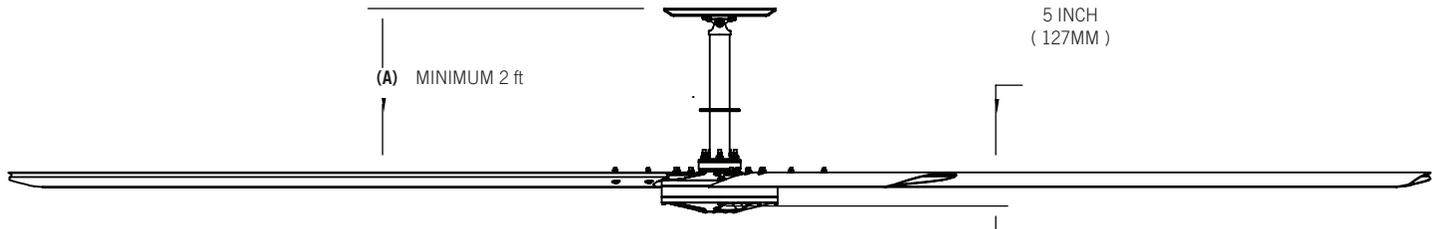

*Pictured with 2 ft downrod*

## MOUNTING & SAFETY

MOUNTING OPTIONS I-beam | Glulam

DOWNROD (A) Downrods available in 3 adjustable increments: 2.5-4 ft, 4.5-6ft, 6.5-10ft.  
**Downrod length must be specified at time of order.**

SAFETY FEATURES Fan Retention System | Airfoil Retention System | Fire Relay

## IN THE BOX

INCLUDED Fan I-beam mount with pre-wired downrod | Control panel | Install manual Mounting hardware kit | Communication Kit | Guy wire kit

OPTIONAL Additional cable lengths | Glulam brackets | Fire Relay

## WARRANTY & CERTIFICATIONS

CERTIFICATIONS ETL/Intertek-certified to ANSI/UL 507 and CSA C22.2 No. 113 in North America

WARRANTY<sup>1</sup> Limited 5-Year Warranty

<sup>1</sup>See complete warranty for details.

