

Hitch Lift

Heavy-duty 12 volt DC motorized hitch lift. Standard 2" receiver bar has multiple pin positions for different tailgate depths (extends out 52" when lowered and 47" when raised). Built-in adjustable limiting device to allow the matching up of the deck plate to the truck bed level or to ground level. 21 foot long cable set for battery connection. Two stage outrigger assemblies for added stability. Be sure to fold the deck plate up before driving away. Tie down straps should be used to secure load. Steel construction.

MODEL NUMBER	PLATFORM SIZE (W x L)	RAMP (W x L)	UNIFORM CAPACITY	WEIGHT (POUND)
HL-55	28" x 25"	28" x 7"	550 lb.	187



Wheel Alignment Curbs

Ideal for properly aligning trailers at loading docks. All welded steel construction suitable for indoor or outdoor use. Units must be secured to surface. Heavy-duty welded-steel construction with yellow baked-in powder-coated toughness. 8" x 8" base plates with eight (8) pre-drilled holes standard.


MODEL NUMBER	HEIGHT	CURB LENGTH	DIAMETER	WEIGHT (POUND)
SWAC-92	8 ^{15/16} "	92"	4 ^{1/2} "	81
SWAC-144	8 ^{15/16} "	144"	4 ^{1/2} "	173
AS-344	(1) 3/4" x 4" CONCRETE ANCHOR BOLT			1
AS-344-4PK	(4) 3/4" x 4" CONCRETE ANCHOR BOLTS			4



Heavy Duty LED Dock Loading Lights 115V 1-PHASE STANDARD

Rugged, heavy duty LED Dock Loading Lights provides brighter light than an incandescent light source while only using 18 watts of power. Encased in a cast aluminum housing with shatter resistant polycarbonate lens cover, these units instantly reach maximum light output. Light head is IP66 rated; can be sprayed down. Expected life of 50,000+ hours; 5 year warranty. UL listed.

MODEL NUMBER	DESCRIPTION	ARM LENGTH	LIGHT BULB INCLUDED	WEIGHT (POUND)
LL-HD-LED-24	SINGLE ARM	24"	YES	17
LL-HD-LED-40	DOUBLE ARM STRUT	40"	YES	25
LL-HD-LED-60	DOUBLE ARM STRUT	60"	YES	28
LL-HD-LED-90	TRIPLE ARM STRUT	90"	YES	38

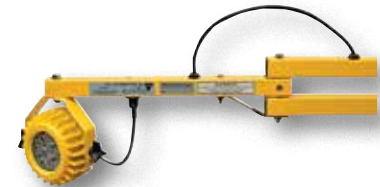

model LL-HD-LED-24

LED Dock Loading Lights 115V 1-PHASE STANDARD

Reduce broken bulb and high maintenance costs with LED Dock Loading Lights. These use 80% less energy than incandescent or halogen bulb. Achieves maximum light intensity instantly, and light is optimized for trailer illumination. These LED lights have no fragile filaments to break, eliminating the shattered glass of broken incandescent bulb. Light bulb included.

MODEL NUMBER	DESCRIPTION	ARM LENGTH	LIGHT BULB INCLUDED	WEIGHT (POUND)
LL-LED-24	SINGLE ARM	24"	YES	11
LL-LED-40	DOUBLE ARM STRUT	40"	YES	15
LL-LED-60	DOUBLE ARM STRUT	60"	YES	18
LL-LED-BULB	REPLACEMENT LED BULB			2



model LL-LED-40

Flexible Gooseneck Dock Lights 115V 1-PHASE STANDARD

Low profile, flexible task light, ideally suited for loading dock applications. It's 27" flexible stainless steel neck can be easily rotated and positioned to light with minimal obstruction to the loading dock area. The dock lights narrow profile and flexibility enable it to be mounted between two (2) neighboring loading docks. With the simple mounting method and ability to be positioned precisely, it is an ideal task light for use around work stations and machinery. UL listed.

MODEL NUMBER	DESCRIPTION	ARM LENGTH	LIGHT BULB INCLUDED	WEIGHT (POUND)
LL-GN-27	INCANDESCENT (90 WATT)	27"	NO	10
LL-GN-LED-27	LED	27"	YES	10



model LL-GN-27



model LL-GN-LED-27