


FEATURES:

- » Lift or move sheets, plates, hot or oily parts
- » Handle sheets stacked horizontally or vertically
- » Protect workers from cuts, slivers, nicks & burns
- » Increase productivity

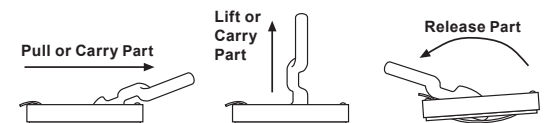

Note: Not intended to be used with a crane


Lift - lbs (kg)	Th. (in)	Wd. (in)	Handle Ln. (in)	Overall. Ln. (in)	Mag. Ln. (in)	Mag. Th. (in)	Wt. (lbs)	Max. Penetration (in)	No. of Poles	Model No.
50.0 (22.6)	4	3-5/8	8	11-1/2	6-1/8	1-3/8	3.75	3/16	4	B100
125.0 (56.7)	4	7-1/4	8	11-1/2	6-1/8	1-3/8	6.25	5/16	6	B250
200.0 (90.7)	4	7-1/4	8	11-1/2	6-1/8	1-3/8	7.25	5/16	8	B400
300.0 (136.0)	4	7-1/4	8	11-1/2	6-1/8	1-3/8	8.25	5/16	10	B600

LOAD CONTROL MAGNET

Stay safe. This extremely powerful On/Off Permanent Rare Earth magnet lets you guide loads into position without being in close proximity. Attach the On/Off permanent magnet to a corner or along the side of your load. As the load is lifted, the Load Control Magnet's articulating connection to the lightweight telescoping pole allows you to control and position the load exactly where you want without endangering yourself, others or expensive equipment, should your lifting device fail.

FEATURES:

- » Powerful On/Off Rare Earth Magnet
- » Works on Flat and Pipe
- » Pole telescopes from 6' to 12'
- » Buy the magnet separately, use your own pole

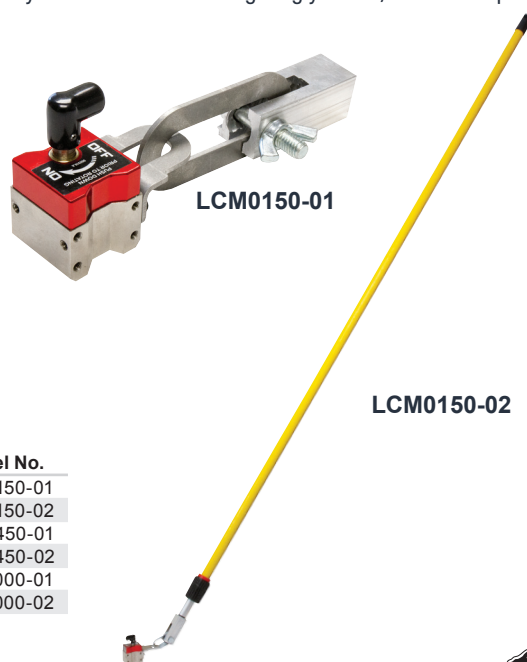


Hold - lbs (kg)	Pole Included	Length (in)	Extended Length (in)	Weight (lbs)	Model No.
150 (68.04)	No	7	N/A	1.20	LCM0150-01
150 (68.04)	Yes	80	147	2.70	LCM0150-02
450 (204.12)	No	8.50	N/A	4.70	LCM0450-01
450 (204.12)	Yes	83	150	6.20	LCM0450-02
1000 (453.60)	No	9.75	N/A	10.95	LCM1000-01
1000 (453.60)	Yes	87.25	151.25	12.45	LCM1000-02

Note: Magnet connector accepts a standard paint roller handle extension thread.

LIFTING BAIL LOCK-OUT

Lifting bail lock-out prevents almost any lifting equipment from being used if it is deemed "out-of-service." This lock-out device fits around the lifting point to prevent a crane hook from entering. No more wire paper tag-outs that get ignored. Protect employees and equipment from lifting a below-the-hook lifting device deemed unsafe. Block the lifting bail on magnets, spreader beams, pad eyes, hoist rings, clevis, bridle leg slings, chain slings, shackles, anything with a lift point. Use your own paddle lock, lock-out hasp or wire zip tie to secure the lock-out to the lift point. Shaped like a stop sign and powder coated red as a visual sign of danger.

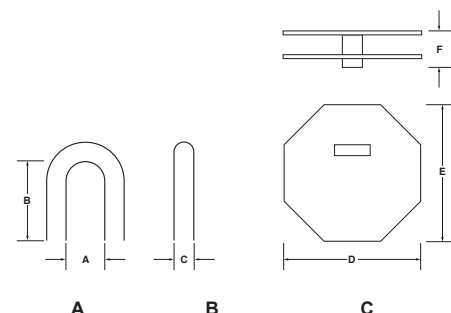

Min/Max (in)	Min/Max (in)	Max (in)	Wd. (in)	Ht. (in)	Th. (in)	Wt. (lb)	Model No.
1 2-1/2	1-5/8 3-7/8	1-3/8	3-7/8	3-7/8	2	0.70	LBL01
1 5-7/8	5-7/8 8	2	8	8	2-3/8	3.10	LBL02