

CUTTING TABLE TOOLS & RETRIEVERS

RAPIDFIRE RETRIEVER®



FEATURES:

- » Retrieve hot parts off cutting tables with speed & precision!
- » Increase production while reducing the potential for injury
- » Powerful Rare Earth Magnet holds part securely
- » "On-Command" release with just a quick blast of shop air
- » Actuate release with just one finger, it's as simple as the pull of a trigger




Lift - lbs (kg)	Dia. (in)	Length (in)	Weight (lbs)	Model No.
35.0 (15.88)	3	24	2.1	RFR2400
35.0 (15.88)	3	36	2.3	RFR3600
35.0 (15.88)	3	48	2.5	RFR4800
16.0 (7.40)	1.5	7	0.5	RFR7-15
35.0 (15.88)	3	7	0.8	RFR7-30

ON/OFF POWER GRIP

FEATURES:

- » Switchable Rare Earth Magnet
- » Securely grips heavy parts
- » Works on flat or pipe
- » Max. Temp. 180°F (82°C)
- » Locking On/Off Handle
- » Comfort Grip

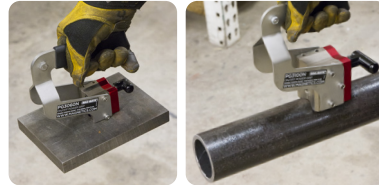

Flat Lift - lbs (kg)	Round Lift - lbs (kg)	Ht. (in)	Wd. (in)	Ln (in)	Magnet Wd. (in)	Magnet Ln (in)	Wt. (lbs)	Model No.
60 (27.22)	30 (13.61)	5	2	6	1-1/2	1-1/4	1.65	PG3060N
100 (45.36)	50 (22.68)	7-3/4	3-3/8	7-1/2	2-1/2	2	5.65	PG3100N

Lift value on pipe varies based on diameter and wall thickness.

POWER GRIP




Our Power Grip Plus sports a light-weight, non-conductive nylon handle and has an easy, side-roll release feature. It's available in three different types of magnetic material for a variety of affordable options based on magnetic strength and/or heat tolerance.

FEATURES:

- » Effective holding against shear force
- » Securely grips heavy parts
- » Maximum Temp. 300°F (148°C)



Magnet Height 1"

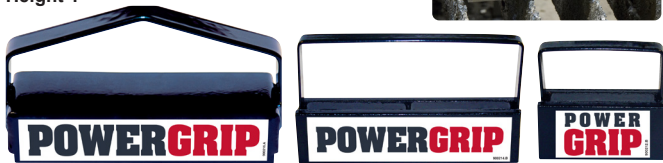

Lift - lbs (kg)	Ht. (in)	Wd. (in)	Ln. (in)	Poles	Wt. (lbs)	Model No.
25.0 (11.34)	2	3/4	2-1/8	2	0.40	AC2100WLH
51.5 (23.36)	2-1/4	3/4	4	2	0.75	AC2200WLH
92.5 (41.96)	2-3/4	1-7/8	5-1/4	4	1.80	AC2201WLH

MAGNETIC TRIGGERLIFT®



Hand held lift allows strong grip of parts with an easy to use trigger release. The new molded plastic design provide better ergonomics and easier release.

FEATURES:

- » Retrieve hot parts from cutting tables
- » One handed operation
- » Permanent magnet
- » Move parts faster and easier
- » Plastic injection molded body and trigger
- » Maximum Temp. 300°F (148°C)



Lift - lbs (kg)	Height (in)	Width (in)	Length (in)	Weight (lbs)	Model No.
36 (16.33)	6"	2-3/4	4-1/8	.90	B090

GRIP STICK RETRIEVER



FEATURES:

- » Reduce employee injury by keeping hands out of press
- » Magnet & Grip ends are interchangeable.
- » Retrieve hot parts
- » 10° angled handle



Lift - lbs (kg)	Type	Ht. (in)	Wd. (in)	Ln. (in)	Wt. (lbs)	Model No.
12.5 (5.67)	Low Profile	7/8	1-3/8	14	0.65	IMPL2100
43.5 (19.73)	Low Profile	7/8	1-3/8	14	0.65	IMPL2104
40.0 (18.14)	Heavy Duty	1-7/8	7/8	14	0.90	IMPL3040
60.0 (27.21)	Heavy Duty	1-7/8	1-7/8	14	1.05	IMPL3060

POWER GRIP PLUS



FEATURES:

- » Securely grips heavy/hot/sharp parts
- » Lightweight, non-conductive nylon handle
- » Easy side-roll release
- » Maximum Temp: Ceramic 300°F (148°C), Neodymium 180°F (82°C), Samarium Cobalt 392°F (200°C)

Note: Magnet Length 6", Magnet Width 0.56"



Lift - lbs (kg)	Magnet Type	Ht. (in)	Wd. (in)	Ln. (in)	Wt. (lbs)	Model No.
50 (22.68)	Ceramic	5	2.17	7.5	2.6	PG2050C
180 (81.65)	Neodymium	5	2.17	7.5	2.6	PG2180N
110 (49.90)	Samarium	5	2.17	7.5	2.6	PG2110S