


## Gantry Sling Racks

Gantry Sling Racks are a great addition to any manufacturing and industrial facility. The strong steel construction, with a baked in powder coat finish, adds toughness and allows for hanging of items both large and small. The lower rack is adjustable to different heights to better suit the user's needs. The included hooks enable the user to hang items from both sides and in offset positions due to their adjustability. This sling rack can be utilized as a stationary or portable unit. Casters and mounting pads are included for the user to choose the desired function type.

MODEL NUMBER	STYLE	OVERALL WIDTH	OVERALL DEPTH	OVERALL HEIGHT	UNIFORM CAPACITY	WEIGHT (POUND)
SLR-UM-6	STATIONARY	77"	36"	75 <sup>1</sup> / <sub>4</sub> "	2,000 lb.	140
	PORTABLE	77"	39"	78 <sup>1</sup> / <sub>2</sub> "	1,200 lb.	164
<b>OPTIONS</b>						
SLR-LS	SLING RACK HOOK LOCK SYSTEM (For one level, includes (2) two locking bars and (2) two locking brackets)					24
SLR-HK	SLING RACK HOOK maximum capacity per double hook is 150 lb.					15

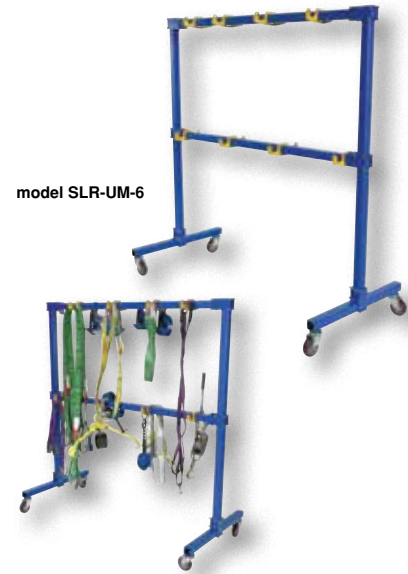

model SL-2-F-8



model SL-2-F-4



model SL-4-F-4



model SL-6-F-10

## Polyester Lifting Slings - Double Ply

For medium to heavy-duty lifting, these double-ply lifting slings are the practical, economical answer to many lifting problems. TYPE III style with fabric ends has flat tapered eyes at both ends and can be used for all hitch types. Double capacity when used in basket-style. Reduce capacity 20% when used in choker-style. These slings meet DIN-EN 1492-1, ANSI standard B30.9 and OSHA requirements.

MODEL NUMBER	STRAIGHT LIFT UNIFORM CAPACITY	LENGTH (FEET)	WIDTH (INCHES)	COLOR CODE	WEIGHT (POUND)
SL-2-F-	3,200 lb.	4	1	GRAY	2
SL-2-F-6	2,000 lb.	6	1	PURPLE	2
SL-2-F-	2,000 lb.	8	1	PURPLE	2
SL-2-F-10	2,000 lb.	10	1	PURPLE	2
SL-4-F-	4,000 lb.	4	2	GREEN	2
SL-4-F-6	4,000 lb.	6	2	GREEN	2
SL-4-F-8	4,000 lb.	8	2	GREEN	2
SL-4-F-10	4,000 lb.	10	2	GREEN	2
SL-6-F-4	8,800 lb.	4	3	GRAY	4
SL-6-F-6	6,000 lb.	6	3	YELLOW	4
SL-6-F-8	8,800 lb.	8	3	GRAY	3
SL-6-F-10	6,000 lb.	10	3	YELLOW	3
<b>PACKS OF TEN (10)</b>					
SL-2-F-6-10PK	2,000 lb.	6	1	PURPLE	
SL-2-F-8-10PK	2,000 lb.	8	1	PURPLE	
SL-2-F-10-10PK	2,000 lb.	10	1	PURPLE	
SL-4-F-4-10PK	4,000 lb.	4	2	GREEN	
SL-4-F-6-10PK	4,000 lb.	6	2	GREEN	
SL-4-F-8-10PK	4,000 lb.	8	2	GREEN	
SL-4-F-10-10PK	4,000 lb.	10	2	GREEN	


## Non-Marring Plate Clamps

Designed for lifting and revolving material without marring; smooth or polished plates such as stainless steel, aluminum, pre-lacquered plates, wood, marble, concrete, glass, plastic, or other fragile surfaces. Designed to meet ANSI B30.20-24 standards. Clamps have a permanently attached chain sling with a large oval suspension ring and non-marring polyurethane coated jaws. Lift only one plate at a time.

MODEL NUMBER	MINIMUM PLATE THICKNESS	MAXIMUM PLATE THICKNESS	UNIFORM CAPACITY	OVERALL DIMENSIONS (W x L x H)	WEIGHT (POUND)
NMPC-11	0	0.81	1,100 lb.	5" x 6" x 8"	11
NMPC-33	0	1.13	3,300 lb.	5" x 7" x 10"	26
NMPC-11-3	0	3.94	1,100 lb.	5" x 7" x 10"	15
NMPC-11-4	0.81	4.25	1,100 lb.	5" x 6" x 10"	15
NMPC-11-5	1.56	5.5	1,100 lb.	5" x 8" x 8"	15



NMPC-11-4



NMPC-11