
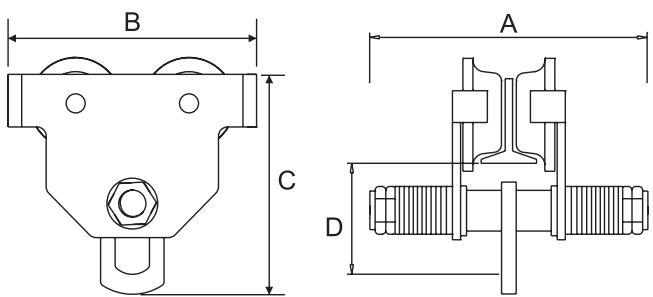


PUSH BEAM TROLLEY

Features

- Lightweight robust construction
- Fits most I, S, and W-Beams
- Durable baked enamel paint protection
- Precision ball bearing trolley wheels
- Anti-drop plate
- Stainless steel ID tag
- Individual test certificate and serial number


**Standards - CE,
ASME B30.11, ASME B30.16**

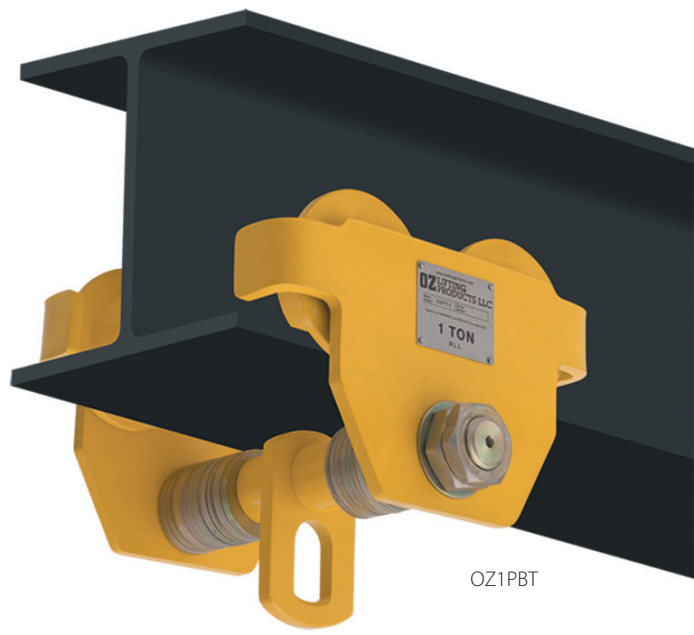

	OZ05PBT	OZ1PBT	OZ2PBT	OZ3PBT	OZ5PBT	OZ10PBT
Capacity (tons)	.5	1	2	3	5	10
Adjustable Flange Width (in)	2.52-8.00	2.52-8.00	3.46-12.00	4.00-12.00	4.49-12.00	4.95-12.00
Max Flange Thickness (in)	1.14	1.50	1.61	1.81	2.28	1.97
Product Dimensions (in)	A	12.25	12.75	17.50	17.31	18.87
	B	8.50	9.45	11.81	13.58	15.55
	C	7.67	8.41	11.26	13.23	15.47
	D	4.33	4.90	6.34	7.28	8.66
Minimum Radius Curve (ft)	2.95	3.28	3.60	4.26	4.59	5.57
Net Weight (lbs)	20	23	37	78	114	198

*Dimensions are for reference only and subject to change without notice.

Wheels & Bail Dimensions

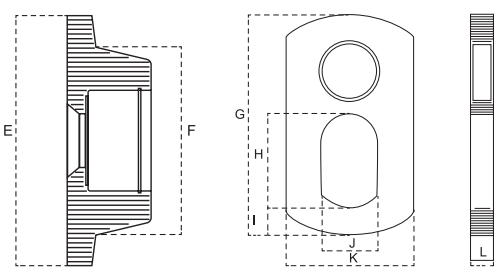

	OZ05PBT	OZ1PBT	OZ2PBT	OZ3PBT	OZ5PBT	OZ10PBT
E (in)	2.83	3.50	4.00	5.79	6.30	7.45
F (in)	2.05	2.48	2.68	4.34	4.81	5.95
G (in)	4.05	4.21	5.31	7.09	8.67	11.23
H (in)	1.50	1.50	2.01	2.96	3.75	4.73
I (in)	0.75	0.75	0.87	1.03	1.38	1.78
J (in)	1.25	1.25	1.50	1.78	2.37	3.23
K (in)	2.25	2.25	2.76	3.94	4.73	5.91
L (in)	0.39	0.39	0.47	0.63	0.79	0.99



WARNING
CANCER AND REPRODUCTIVE HARM
 Some products may contain chemicals known to the state of California to cause cancer, or birth defect or reproductive harm.
www.P65Warning.ca.gov