


CHAIN HOIST

STAINLESS |

Features

- Stainless Steel Type 304 Construction for Corrosion Resistance
- Fully Enclosed Gearing
- Fully Machined Lift Wheel
- Designed for Lifting or Pulling
- Minimal Load Lifting Effort
- Individual Test Certificate and Serial Number
- Forged Stainless Steel Hooks and Safety Latches
- Stainless Steel Hand & Load Chain
- Weather Proof Load Holding Brake
- All Gears and Shafts Run on Roller Bearings
- Stainless Steel Riveted ID Tags
- Low Headroom

Standards - CE, AS1418.2, ASME B30.21, ASME B30.16

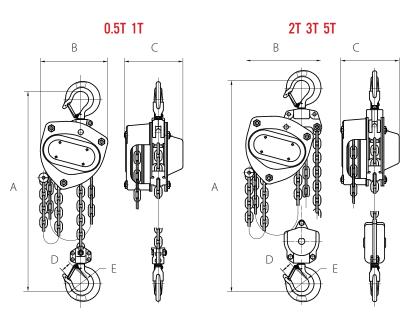

	07	SS005-CH	OZSS010-CH	0755020-CH	OZSS030-CH*	O755050-CH*
Capacity (tops)	-	0.5	1	2	3	5
Capacity (tons)		0.5	ı	2	3	3
Falls of Chain		1	1	2	2	3
Effort to Lift S.W.L (lbs)		67	67	74	74	74
Loadchain Diameter (mm)		7	7	7	9	9
Dimensional Information (in)	Α	14.8	14.8	16.73	22.24	27.95
	В	6.77	6.77	7.56	9.06	14.37
	C	5.94	5.94	5.94	6.81	7.44
Hook-opening, upper & lower	D	1.02	1.02	1.33	1.53	1.61
	Е	1.57	1.57	1.96	2.16	2.55
Net Weight of Head Only (lbs)		16.3	16.3	22.9	34.7	66.1

^{*}Chain Hoists 3 Ton and 5 Ton available. Special order.

Standard Lift: 10, 15, 20, 30 ft. We also do custom rigging

Dimensions are for reference only and subject to change without notice.

















