

Economy Spreader Beams


These versatile lifters are ideal for lifting a variety of loads where headroom is limited. Complies with OSHA and ANSI B30.20 standards. Two (2) safety swivel hooks included. Usable bail 3" wide by 5" high. Features heavy-duty welded steel construction and a baked-in powder-coated toughness.

MODEL NUMBER	MINIMUM/MAXIMUM SPREAD	HEADROOM	UNIFORM CAPACITY	WEIGHT (POUND)
SBM-10-3	21" / 33"	14"	1,000 lb.	67
SBM-10-4	33" / 45"	14"	1,000 lb.	75
SBM-10-6	45" / 69"	14"	1,000 lb.	96
SBM-10-8	69" / 93"	14"	1,000 lb.	105
SBM-10-10	93" / 117"	14"	1,000 lb.	141
SBM-10-12	117" / 141"	14"	1,000 lb.	212
SBM-20-3	21" / 33"	14"	2,000 lb.	54
SBM-20-4	33" / 45"	14"	2,000 lb.	61
SBM-20-6	45" / 69"	14"	2,000 lb.	103
SBM-20-8	69" / 93"	14"	2,000 lb.	159
SBM-20-10	93" / 117"	15"	2,000 lb.	188
SBM-20-12*	117" / 141"	15"	2,000 lb.	232
SBM-40-3	21" / 33"	14 ³ / ₈ "	4,000 lb.	76
SBM-40-4	33" / 45"	14 ³ / ₈ "	4,000 lb.	112
SBM-40-6	45" / 69"	15 ³ / ₈ "	4,000 lb.	147
SBM-40-8	69" / 93"	18 ³ / ₈ "	4,000 lb.	222
SBM-40-10	93" / 117"	18 ³ / ₈ "	4,000 lb.	275
SBM-40-12	117" / 141"	18 ³ / ₈ "	4,000 lb.	295
SBM-60-3	21" / 33"	15 ¹ / ₁₆ "	6,000 lb.	78
SBM-60-4	33" / 45"	15 ¹ / ₁₆ "	6,000 lb.	146
SBM-60-6	45" / 69"	18 ¹ / ₁₆ "	6,000 lb.	187
SBM-60-8	69" / 93"	18 ¹ / ₁₆ "	6,000 lb.	247
SBM-60-10	93" / 117"	18 ¹ / ₁₆ "	6,000 lb.	305
SBM-60-12*	117" / 141"	18 ¹ / ₁₆ "	6,000 lb.	393

*LIQUID PAINT FINISH



model SBM-40-3

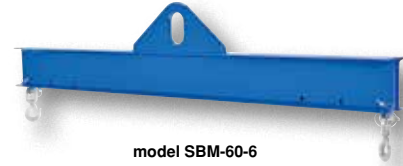


model SBM-60-6

Adjustable Spreader Beams

Lift uneven loads and keep them level with increased safety. Includes two lower bails and one upper bail. Adjust bails in 4" increments. The bails slide between two 5" high C-Channels (8" high model SBM-80). Meets ASME B30.20-1993 standard. Baked-in powder-coated toughness.

MODEL NUMBER	MINIMUM SPREAD	MAXIMUM SPREAD	UPPER BAIL (W x H)	LOWER BAIL (W x H)	HEAD ROOM	UNIFORM CAPACITY	WEIGHT (POUND)
SBM-25	8"	6'	2½" x 5"	1½" x 4½"	14¾"	2,500 lb.	146
SBM-40	8"	6'	3" x 5½"	2" x 4"	14¾"	4,000 lb.	170
SBM-80	8"	8'	4" x 7¼"	3" x 5¼"	20¾"	8,000 lb.	350
SM-LB-25	ADDITIONAL LOWER BAIL FOR SBM-25						10
SM-UB-2	ADDITIONAL UPPER BAIL FOR SBM-25						11
SM-LB-40	ADDITIONAL LOWER BAIL FOR SBM-40						16
SM-UB-4	ADDITIONAL UPPER BAIL FOR SBM-40						17
SM-LB-80	ADDITIONAL LOWER BAIL FOR SBM-80						24
SM-UB-8	ADDITIONAL UPPER BAIL FOR SBM-80						33

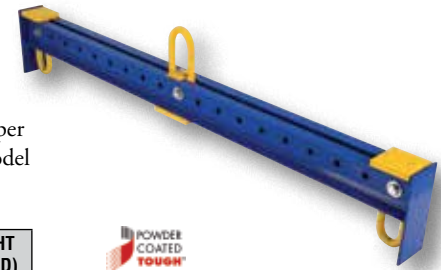

UPPER BAIL
model SM-UB




LOWER BAIL
model SM-LB

Basket Lifting Beam

Lift uneven loads and keep them level with increased safety. Includes one upper bail and two specialty designed bail/sling holders. Bails are adjustable in 4" increments. The bails slide between two (2) 5" high C-Channels. Meets ASME B30.20-1993 standard. Baked-in powder-coated toughness. Polyester lifting slings sold separately on page 215.

MODEL NUMBER	MAXIMUM ARM WIDTH	MINIMUM ARM WIDTH	OVERALL WIDTH	UNIFORM CAPACITY	WEIGHT (POUND)
SBM-40-BL	72"	16"	78"	4,000 lb.	176

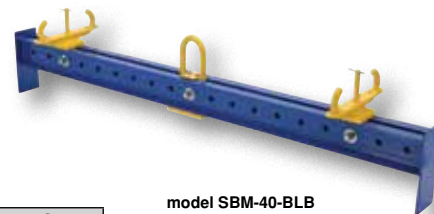

model SBM-40-BL

