


## Round or Triangular Fork Extensions

Ideal for moving around large rolls of material. Available in round or triangular style. Baked-in powder-coated toughness. To install, insert loop at the tip of the fork and slide it up at a 45° angle. Then, lay it down over the fork. OSHA regulations require that extensions do not exceed the length of the existing fork length by more than 150% (e.g. 48" existing forks, the fork extension should not exceed 72").


MODEL NUMBER	ACCOMMODATES FORK WIDTH	FORK EXTENSION INSIDE WIDTH	USABLE LENGTH	MAX. FORK THICKNESS	WEIGHT PAIR (LB.)
<b>ROUND EXTENSIONS</b>					
FE-4-54-R	4"	4½"	54"	2"	82
FE-4-63-R	4"	4½"	63"	2"	96
FE-5-54-R	5"	5½"	54"	2"	96
FE-5-63-R	5"	5½"	63"	2"	110
<b>TRIANGULAR EXTENSIONS</b>					
FE-4-54-T	4"	4½"	54"	2"	84
FE-4-63-T	4"	4½"	63"	2"	98
FE-5-54-T	5"	5½"	54"	2"	96
FE-5-63-T	5"	5½"	63"	2"	110

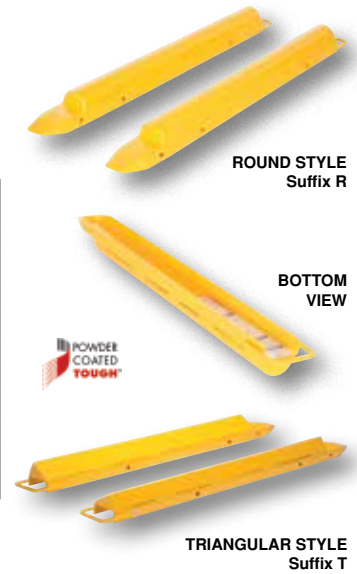

## Fork Rear Spacers

Insert the loop at the tip of the fork and slide it up at a 45° angle. Then, lay it down over the existing forks. Practical for pushing pallets two or three deep into a trailer conveniently and easily.

MODEL NUMBER	ACCOMMODATES FORK WIDTH	SPACER LENGTH	MAXIMUM FORK THICKNESS	WEIGHT PAIR (LB.)
FRS-4-12	4"	12"	2"	36
FRS-5-12	5"	12"	2"	41
FRS-6-12	6"	12"	2"	44



## Roller Forks

Mechanical forks designed to reduce costs through pallet-less handling. Ideal for FIBC bags, (large bulk sacks), slip-sheeted goods, and corrugated bundles as well as regular pallets. Use with standard lift truck forks providing greater operational versatility. The unique series of dual-roller cartridges allow the forks to place and retrieve heavy loads quickly and easily. See website for additional sizes.

MODEL NUMBER	WIDTH	LENGTH	HEAL THICKNESS	MOUNTING CLASS	UNIFORM CAPACITY	WEIGHT (POUND)
RF-20-42	7.5"	43.3"	1.9"	II	2,200 lb.	286
RF-20-48	7.5"	47.2"	1.9"	II	2,200 lb.	297
RF-30-42	6.3"	43.3"	1.9"	II/III	3,300 lb.	272
RF-30-48	6.3"	47.2"	1.9"	II/III	3,300 lb.	255
RF-40-42	8.25"	43.3"	2.3"	II	4,400 lb.	326
RF-40-48	8.25"	47.2"	2.3"	II	4,400 lb.	341
RF-50-42	8.25"	43.3"	2.3"	II/III	5,300 lb.	335
RF-50-48	8.25"	47.2"	2.3"	II/III	5,300 lb.	353
RF-60-42	12.2"	43.3"	2.3"	II/III	6,600 lb.	562
RF-60-48	12.2"	47.2"	2.3"	II/III	6,600 lb.	595



## Fork Lift Loading Attachment

The Dock-Pro™ can increase company productivity and reduce injury. The unit is easy to use, involves low maintenance, and comes with a 96" long conveyor and safety lock. It is adjustable to 30½" below dock height and is adaptable to most fork lifts with custom designs available. The Dock-Pro™ is a fork lift attachment designed to help load and carry material from loading dock fork lift to pickup truck. It is designed to be safe, productive, and cost effective. Safety restraint is included to secure unit to fork truck.

MODEL NUMBER	OVERALL SIZE (W x L x H)	FORK POCKET SIZE (W x L)	UNIFORM CAPACITY	WEIGHT (POUND)
DP-3896-15	39½" x 143" x 40"	5½" x 2½"	1,500 lb.	1090



## Fork Lifter

Designed to quickly and easily attach or remove forged steel forks from a carriage. The lifter features six different hook points to balance a variety of fork lengths. Two tightening knobs are included to secure the fork to the lifter when being moved. Steel construction with tough-baked in powder-coated yellow finish.



MODEL NUMBER	OVERALL SIZE (W x L x H)	FORK POCKET (W x H)	UNIFORM CAPACITY	WEIGHT (POUND)
FORK-P	6" x 18½" x 14"	5½" x 3"	400 lb.	30

