



model FLAD-3-SS

Folding Ladders with Wheels

Locking folding design saves on storage space when ladder is not in use. Ladder folds after unlocking one spring-loaded detent pin. Once unit is folded, tilt back on wheels for easy portability. The steps are perforated to provide a non-slip surface. The ladders have 7" deep steps and a climb angle of 58°. Stainless steel construction. Complies with ANSI 14.7 and OSHA 1910.29 specifications.

MODEL NUMBER	NUMBER OF STEPS	TOP STEP HEIGHT	UNIFORM CAPACITY	WEIGHT (POUND)
FLAD-2-SS	2	20"	350 lb.	31
FLAD-3-SS	3	30"	350 lb.	39
FLAD-4-SS	4	40"	350 lb.	47




model ASP-24-3-SS

Adjustable Step-Mate Stands

Our Adjustable Step-Mate Stands can be used as either a comfortable worker platform or a semi-permanent step. Individual step size is 11¾" deep. Serrated surface ensures safe footing. Legs adjust individually by screwing them into or out of the leg base. Welded stainless steel construction. Uniform capacity 500 pounds. Model ASP-PORT only fits on two (2) step models: 24", 36", and 48" wide.


MODEL NUMBER	OVERALL (W x D)	NUMBER OF STEPS	LOWER STEP HEIGHT	MIDDLE STEP HEIGHT	UPPER STEP HEIGHT	WEIGHT (POUND)
ASP-24-SS	23¾" x 22 ⁷ / ₈ "	2	6¼" to 8¼"	--	13¼" to 15¼"	38
ASP-36-SS	35¾" x 22 ⁷ / ₈ "	2	6¼" to 8¼"	--	13¼" to 15¼"	58
ASP-48-SS	47¾" x 22 ⁷ / ₈ "	2	6¼" to 8¼"	--	13¼" to 15¼"	82
ASP-60-SS	59¾" x 22 ⁷ / ₈ "	2	6¼" to 8¼"	--	13¼" to 15¼"	112
ASP-72-SS	71¾" x 22 ⁷ / ₈ "	2	6¼" to 8¼"	--	13¼" to 15¼"	124
ASP-24-3-SS	23¾" x 33 ⁷ / ₈ "	3	6¼" to 8¼"	13¼" to 15¼"	20¼" to 22¼"	61
ASP-36-3-SS	35¾" x 33 ⁷ / ₈ "	3	6¼" to 8¼"	13¼" to 15¼"	20¼" to 22¼"	65
ASP-48-3-SS	47¾" x 33 ⁷ / ₈ "	3	6¼" to 8¼"	13¼" to 15¼"	20¼" to 22¼"	113
PORTABILITY OPTIONS						
ASP-PORT	BOLT-ON PORTABILITY KIT ((2) STEP; 24", 36", & 48" WIDE UNITS)					12

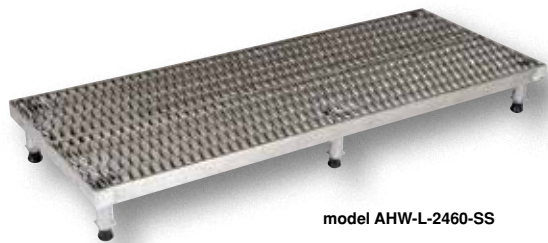

model AHW-L-2460-SS

Adjustable Work-Mate Stands

Minimizes fatigue by elevating workers to heights that are comfortable and ergonomically correct. Especially useful when multiple shift employees operate the same piece of machinery. Serrated surface ensures safe footing in most wet environments. Ergonomic matting surface provides comfort for the operator who stands all day. The height of each leg can be adjusted individually to ensure proper working height. All sizes have four (4) legs except the 60", 72" and 96" long models, which have six (6) legs. Uniform capacity is 500 pounds each. Welded stainless steel construction.



model AHW-L-1924-SS

DECK SIZE (W x L)	SERVICE RANGE	MODEL NUMBER	WEIGHT (POUND)	MODEL NUMBER	WEIGHT (POUND)
		SERRATED SURFACE		ERGONOMIC MATTING SURFACE	
19" x 24"	6¾" to 8¾"	AHW-L-1924-SS	30	AHT-L-1924-SS	35
24" x 24"	6¾" to 8¾"	AHW-L-2424-SS	39	AHT-L-2424-SS	36
19" x 36"	6¾" to 8¾"	AHW-L-1936-SS	45	AHT-L-1936-SS	41
24" x 36"	6¾" to 8¾"	AHW-L-2436-SS	50	AHT-L-2436-SS	48
19" x 48"	6¾" to 8¾"	AHW-L-1948-SS	53	AHT-L-1948-SS	51
24" x 48"	6¾" to 8¾"	AHW-L-2448-SS	59	AHT-L-2448-SS	57
24" x 60"	6¾" to 8¾"	AHW-L-2460-SS	65	AHT-L-2460-SS	112
24" x 72"	6¾" to 8¾"	AHW-L-2472-SS	115	AHT-L-2472-SS	132
24" x 96"	6¾" to 8¾"	AHW-L-2496-SS	124	AHT-L-2496-SS	158
19" x 24"	10½" to 16½"	AHW-H-1924-SS	37	AHT-H-1924-SS	37
24" x 24"	10½" to 16½"	AHW-H-2424-SS	40	AHT-H-2424-SS	40
19" x 36"	10½" to 16½"	AHW-H-1936-SS	47	AHT-H-1936-SS	57
24" x 36"	10½" to 16½"	AHW-H-2436-SS	57	AHT-H-2436-SS	63
19" x 48"	10½" to 16½"	AHW-H-1948-SS	58	AHT-H-1948-SS	55
24" x 48"	10½" to 16½"	AHW-H-2448-SS	65	AHT-H-2448-SS	68
24" x 60"	10½" to 16½"	AHW-H-2460-SS	111	AHT-H-2460-SS	130
24" x 72"	10½" to 16½"	AHW-H-2472-SS	135	AHT-H-2472-SS	132
24" x 96"	10½" to 16½"	AHW-H-2496-SS	136	AHT-H-2496-SS	175