



Crushes 55 gallon steel drums to only 6" high.

### Hydraulic Drum Crusher/Compactors

Crushes 55 gallon steel drums to approximately 6" high. Full cycle time is 25 seconds crush and retract. This unit is designed for a duty cycle that will allow for crushing or compacting up to 250 drums per week in a typical, non-hazardous, indoor, room temperature environment when operated on a three-phase power supply. 38,000 pounds of crushing force. The included drum compacting feature allows you to compact contents inside the drum by simply removing the drum crushing plate. Crushing feature will work with any drum size up to 55 gallons. Compacting feature will only work with 55 gallon drums. Safety features include a pressure relief valve, which prevents overload, and a double door latch to secure the door when crushing. Plus an interlock system that will prevent the motor from running unless the door is closed. 6.5 hp motor, 3-phase, 60 hz. Choose from 208V, 230V, or 460V. Meets OSHA 1910.212 / ANSI Z245.5 / JIC standards. Built-in fork pockets aid in transporting, Aluminum drip pan for catching any excess liquid that may be expelled during the crushing operation. The pan holds 1 gallon and measures 31½" W x 4½" L x 1⅝" H. Replacement and additional drip pans are available. Crating is recommended for international shipments, contact factory.

MODEL NUMBER	DESCRIPTION	WEIGHT (POUND)
HDC-905-IDC/460V	CRUSHER/COMPACTOR, 460V, 3-PHASE	1570
HDC-905-HC/460V	CRUSHER/COMPACTOR, 460V, W/HIGH CYCLE PACKAGE	2148
HDC-905-IDC/230V	CRUSHER/COMPACTOR, 230V, 3-PHASE	1570
HDC-905-HC/230V	CRUSHER/COMPACTOR, 230V, W/HIGH CYCLE PACKAGE	2148
HDC-905-IDC/208V	CRUSHER/COMPACTOR, 208V, 3-PHASE	1570
HDC-905-HC/208V	CRUSHER/COMPACTOR, 208V, W/HIGH CYCLE PACKAGE	2148
HDC9-1	OPTIONAL 3HP POWER UNIT, 1-PHASE (OPTION FOR HDC-905-IDC) AT 208-230V, CYCLE TIME INCREASES TO 70 SEC. AND REQUIRES 20 AMP SUPPLY CIRCUIT.	
HDC-905-WD	OPTIONAL WASHDOWN MOTOR & NEMA 4 ENCLOSURE	
HDC-905-DPN	EXTRA ALUMINUM DRIP PAN 31½" x 4½" x 1⅝" (1 GALLON CAPACITY)	4



### Mobile Gasoline Powered Drum Crusher

Take the Drum Crusher to where the drums are! Full cycle time is 25 seconds crush and retract. Features an 570cc Briggs & Stratton gasoline engine. Hydraulic reservoir holds up to 30 gallons of hydraulic oil. Power tilt and integral trailer with tail and brake lights are included. Exterior tension mounted twin cylinders eliminate rod buckling and damage. Unit ships flat bed truck.

MODEL NUMBER	DESCRIPTION	WEIGHT (POUND)
HDC-900-GPT	GAS POWERED DRUM CRUSHER	3400




ROLL-OUT BASE ASSEMBLY model MTC-RB

model MTC-55

### Manual Trash Compactors

This easy to use product is designed for compacting the contents of 30 and 55 gallon drums. Manual ratcheting mechanism has 7,000 pounds of compacting force. Ratchet mechanism is also used to retract compacting plate. Compacting plate direction is adjusted with selector levers. Ratchet lever is secured in the UP position with locking pin. Includes two (2) wheels for tilt-and-roll portability of unit when empty. Drum not included. Baked-in powder-coated toughness.

MODEL NUMBER	DRUM TYPE (GALLON)	SERVICE RANGE	COMPACTOR HEAD DIAMETER/THICKNESS	OVERALL SIZE (W x D x H)	WEIGHT (POUND)
MTC-55	55	1¼" to 35¾"	21" / ¼"	32⅞" x 24¼" x 85⅝"	249
MTC-30	30	1¼" to 35¾"	17" / ¼"	32⅞" x 24¼" x 85⅝"	202
MTC-RB	OPTIONAL ROLL-OUT BASE ASSEMBLY				60

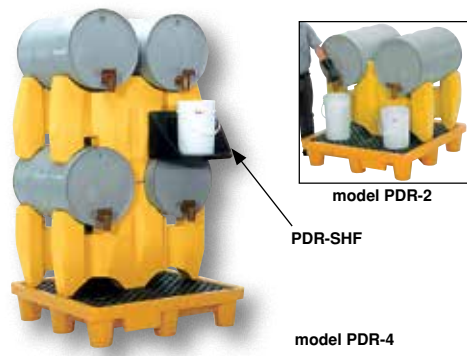

model PDR-2

PDR-SHF

model PDR-4

### Polyethylene Drum Racks

Polyethylene Drum Racks capture spills while keeping your workplace clean and safe. All models tilt the drums slightly forward, allowing maximum drainage and optimizing the use of chemicals while minimizing waste. These improve worker safety by keeping slippery chemicals and oils off the floor.

MODEL NUMBER	DRUM CAPACITY	OVERALL SIZE (W x D x H)	UNIFORM CAPACITY	CONTAINMENT CAPACITY	WEIGHT (POUND)
PDR-2	(2) 55 GAL.	53" x 53" x 44¾"	1,500 lb.	66 GALLON	137
PDR-4	(4) 55 GAL.	53" x 53" x 77¾"	3,000 lb.	66 GALLON	189
PDR-SHF	OPTIONAL DISPENSING SHELF (22"W x 17"L x 5"H)				15