



series LAD-FM




Mezzanine Ladders (face mounted/retractable)

The Mezzanine Ladders are used for infrequent usage to access mezzanines. They are ratcheted into climbing angle and back into stored position. The wheels roll on the ground when ratcheted and the handrails mechanically rise into climb position when ladder locks into position. Quickly extend and retract the ladder. The mezzanine ladder allows for quick installation with mounting bracket provided for bolt-on installation or welded installation. Steps are 24¼" wide. Collapsed distance from wall is approximately 15½" for all models. Customer must provide their mezzanine height at time of purchase. Baked-in powder-coated toughness. Meets or exceeds all OSHA requirements. Ships knockdown, some assembly required. Survey sheet available on page 247 for mezzanine heights of 60" to 120".


MODEL NUMBER	MEZZANINE HEIGHT	UNIFORM CAPACITY	INCLINE ANGLE	WEIGHT (POUND)
LAD-FM-60	60"	350 lb.	58°	257
LAD-FM-72	72"	350 lb.	58°	282
LAD-FM-84	84"	350 lb.	58°	316
LAD-FM-96	96"	350 lb.	58°	332
LAD-FM-108	108"	350 lb.	58°	354
LAD-FM-120	120"	350 lb.	58°	386

Alternating-Tread Stairs

Alternating-Tread Step design offers a shorter span than traditional steps. Features handrail on each side of unit, dual safety chain at the top of the stair, and formed steel steps with raised surfaces for better traction. Welded steel construction with bolt-on handrails. Baked-in powder-coated toughness. Meets OSHA specification 29 CFR 1910.25 (e). Ships knockdown for lower freight costs.

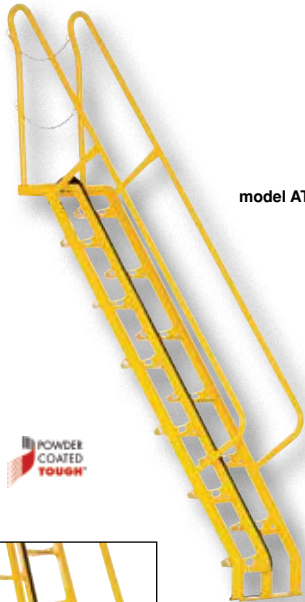

model ATS-8-56



MODEL NUMBER	NUMBER OF STEPS	TOP STEP HEIGHT	OVERALL LENGTH	STEP ANGLE	UNIFORM CAPACITY	WEIGHT (POUND)
ATS-4-56	7	48 ¹ / ₈ "	41 ⁵ / ₈ "	56°	350 lb.	188
ATS-5-56	8	60 ¹ / ₈ "	49 ¹ / ₄ "	56°	350 lb.	192
ATS-6-56	10	72 ¹ / ₈ "	57 ¹ / ₂ "	56°	350 lb.	214
ATS-7-56	12	84 ¹ / ₈ "	65 ³ / ₄ "	56°	350 lb.	224
ATS-8-56	13	96 ¹ / ₈ "	73 ¹ / ₂ "	56°	350 lb.	251
ATS-9-56	15	108 ³ / ₈ "	81 ⁵ / ₈ "	56°	350 lb.	284
ATS-10-56	16	120 ¹ / ₈ "	89 ³ / ₄ "	56°	350 lb.	312
ATS-11-56	17	131 ⁷ / ₈ "	97 ¹ / ₂ "	56°	350 lb.	374
ATS-12-56	20	143 ⁷ / ₈ "	106"	56°	350 lb.	400
ATS-13-56	21	156 ³ / ₈ "	114 ¹ / ₈ "	56°	350 lb.	438
ATS-14-56	24	168 ¹ / ₈ "	122 ³ / ₈ "	56°	350 lb.	470
ATS-4-68	7	48 ¹ / ₈ "	30"	68°	350 lb.	164
ATS-5-68	8	60 ¹ / ₈ "	34 ⁵ / ₈ "	68°	350 lb.	180
ATS-6-68	10	72 ¹ / ₈ "	39 ¹ / ₂ "	68°	350 lb.	212
ATS-7-68	12	84 ¹ / ₈ "	44 ¹ / ₂ "	68°	350 lb.	238
ATS-8-68	13	96 ¹ / ₈ "	49 ¹ / ₈ "	68°	350 lb.	248
ATS-9-68	15	108 ¹ / ₈ "	54 ¹ / ₈ "	68°	350 lb.	256
ATS-10-68	16	120 ¹ / ₈ "	58 ⁷ / ₈ "	68°	350 lb.	274
ATS-11-68	17	131 ⁷ / ₈ "	63 ¹ / ₂ "	68°	350 lb.	298
ATS-12-68	20	143 ⁷ / ₈ "	68 ¹ / ₂ "	68°	350 lb.	338
ATS-13-68	21	156 ³ / ₈ "	73 ¹ / ₂ "	68°	350 lb.	406
ATS-14-68	24	168 ¹ / ₈ "	78 ³ / ₈ "	68°	350 lb.	456