

Extruded Bumpers

Made of all weather and abrasion resistant rubber. The half-oval shape allows for effective fendering action over a wide radius. A metal plate is located inside 4" and 6" projection bumpers for support while the 2" unit comes with one washer per hole (this does not include the 120" long models). Custom lengths available up to 10 feet. Installation hardware sold separately, see below.



TYPE	MODEL NUMBER	OVERALL SIZE (L x W x H)	# OF HOLES & SIZE	WEIGHT (POUND)
A	M-2-12	12"L x 2"W x 1¾"H	2, 1/2"	2
A	M-2-18	18"L x 2"W x 1¾"H	2, 1/2"	2
A	M-2-24	24"L x 2"W x 1¾"H	2, 1/2"	3
A	M-2-36	36"L x 2"W x 1¾"H	3, 1/2"	8
A	M-2-120	120"L x 2"W x 1¾"H	0	13
B	M-4-12	12"L x 4¼"W x 4"H	2, 7/8"	8
B	M-4-18	18"L x 4¼"W x 4"H	2, 7/8"	10
B	M-4-24	24"L x 4¼"W x 4"H	2, 7/8"	14
B	M-4-36	36"L x 4¼"W x 4"H	3, 7/8"	18
B	M-4-120	120"L x 4¼"W x 4"H	0	56
C	M-6-12	12"L x 6"W x 6"H	2, 7/8"	14
C	M-6-18	18"L x 6"W x 6"H	2, 7/8"	18
C	M-6-24	24"L x 6"W x 6"H	2, 7/8"	24
C	M-6-36	36"L x 6"W x 6"H	3, 7/8"	34
C	M-6-120	120"L x 6"W x 6"H	0	137
ANCHOR BOLTS HARDWARE FOR CONCRETE INSTALLATION				
---	AS-383	(1) 3/8" x 3", USE WITH M-2 SERIES		1
---	AS-383-4PK	(4) 3/8" x 3", USE WITH M-2 SERIES		4
---	AS-344	(1) 3/4" x 4", USE WITH M-4 & M-6 SERIES		1
---	AS-344-4PK	(4) 3/4" x 4", USE WITH M-4 & M-6 SERIES		4



TYPE A • M-2-SERIES



TYPE B • M-4-SERIES




TYPE C • M-6-SERIES

Trailer Crane Bumpers

Manufactured from fiber reinforced prime rubber containing nylon to resist abrasion, impact, wear, and corrosion. Impervious to weather damage. All models have pre-drilled, countersunk mounting holes for easy installation. Installation hardware available separately, see below.

MODEL NUMBER	WIDTH	LENGTH	PROJECTION	COLOR	# OF HOLES & SIZE	WEIGHT (POUND)
TB-10	3"	6"	2 ^{15/16} "	BLACK	2, 5/8"	3
TB-20	3½"	6"	3½"	BLACK	2, 5/8"	5
TB-70	2"	16"	2"	BLACK	3, 1/2"	3
TB-70-Y	2"	16"	2"	YELLOW	3, 1/2"	3
TB-90	5 ^{5/8} "	7 ^{5/8} "	3¾"	BLACK	4, 5/8"	6
ANCHOR BOLTS HARDWARE FOR CONCRETE INSTALLATION						
AS-125	(1) 1/2" x 5", USE WITH TB-10, TB-20, TB-70, TB-70-Y					1
AS-125-4PK	(4) 1/2" x 5", USE WITH TB-10, TB-20, TB-70, TB-70-Y					4
AS-584	(1) 5/8" x 4", USE WITH MODEL TB-90					1
AS-584-4PK	(4) 5/8" x 4", USE WITH MODEL TB-90					4

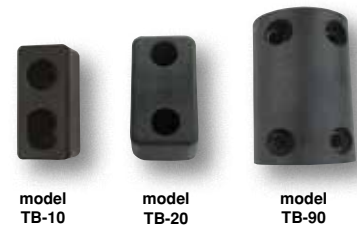

Hardened Molded Bumpers

These pre-drilled bumpers are constructed of fiber reinforced rubber containing nylon and polyester for all weather conditions. Provides high impact resistance. Steel reinforcement rings are molded into each bumper for installation. Uses 5/8" anchor bolts. Sold individually. Order installation hardware separately, see below.

MODEL NUMBER	WIDTH	LENGTH	PROJECTION	# OF HOLES & SIZE	WEIGHT (POUND)
DBE-10-1	4½"	10"	3"	2, 3/4"	6
DBE-20-1	4½"	20"	3"	4, 3/4"	13
DBE-30-1	4½"	30"	3"	6, 3/4"	16
ANCHOR BOLTS HARDWARE FOR CONCRETE INSTALLATION					
AS-584	(1) 5/8" x 4"				1
AS-584-4PK	(4) 5/8" x 4"				4

