


## Traction-Drive Carts DC POWERED STANDARD

Unique carts feature built-in traction-drive system for easy transportability. Ideal for applications including mail rooms, hospitals, supermarkets, hotels, and warehouses. Features 450W electric drive motor with two (2) 12V batteries for power. 110V AC internal battery charger is included along with battery level indicator. Variable speed throttle control for precise maneuvering and positioning is located in the handle. Units roll smoothly on two (2) 9" x 3¼" solid foam rubber steering wheels and two (2) 10" x 3¼" solid foam drive wheels. Walking speed is 0-2.8 mph when unloaded and 0-1.5 mph when loaded. Speed control is conveniently located in handle. Handle pivots back towards operator and includes horn and emergency stop. Maximum incline is 7 degrees. Each shelf includes a tread plate surface.

MODEL NUMBER	PLATFORM SIZE (W x L)	OVERALL SIZE (W x L x H)	NUMBER OF SHELVES	UNIFORM STATIC CAPACITY	WEIGHT (POUND)
NE-CART-1	28" x 48"	28" x 59" x 44"	N/A	750 lb.	526
NE-CART-2	24¾" x 46"	28" x 59" x 44"	N/A	750 lb.	586
NE-CART-3	24¾" x 46"	28" x 59" x 44"	2	750 lb.	598
NE-CART-4	24¾" x 46"	28" x 59" x 59"	3	750 lb.	610

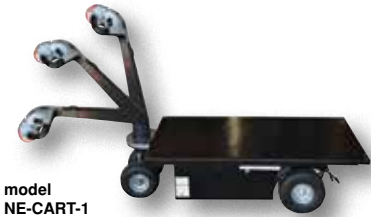

model  
NE-CART-1



model  
NE-CART-3



model  
NE-CART-2



model  
NE-CART-4

## Adjustable Tote Dollies

Unique design is adjustable in both width and length for use with different size totes. Easy to adjust by loosening the screws and sliding each side in or out. Each unit includes four (4) swivel casters (two with brake) that are attached with caster pads. Overall size is 2½" greater than the usable size. Welded steel construction for maximum strength with a baked-in powder-coated toughness. Totes sold separately.

MODEL NUMBER	MINIMUM USABLE SIZE	MAXIMUM USABLE SIZE	UNIFORM STATIC CAPACITY	CASTER SIZE / STYLE	WEIGHT (POUND)
ATD-1622-4	16"W x 22"L	24"W x 34"L	2,000 lb.	4" GFN*	40
ATD-1622-6	16"W x 22"L	24"W x 34"L	3,000 lb.	6" GFN*	43

\*GLASS-FILLED NYLON



model ATD-1622-4




## Aluminum and Steel Plate Dollies

Plate Dollies are manufactured with a ⅜" thick raised diamond pattern aluminum or steel tread plate. A smooth deck is available upon request. Dollies are approximately 6" high and include 4" x 2" mold-on-rubber casters, two (2) rigid and two (2) swivel with brake (suffix -AS features four (4) swivel casters with locks). The steel unit has a blue baked-in powder-coated toughness. Optional pull strap or hook is available separately, see page 366.


MODEL NUMBER	DECK SIZE (W x L)	UNIFORM STATIC CAPACITY	CASTER SIZE	DECK HEIGHT	WEIGHT (POUND)
<b>ALUMINUM PLATE DOLLIES</b>					
VPLDO/A-1418	14" x 18"	1,200 lb.	4" x 2"	6⅛"	49
VPLDO/A-1824	18" x 24"	1,200 lb.	4" x 2"	6⅛"	65
VPLDO/A-2430	24" x 30"	1,200 lb.	4" x 2"	6⅛"	70
VPLDO/A-1418-AS	14" x 18"	1,200 lb.	4" x 2"	6⅛"	37
VPLDO/A-1824-AS	18" x 24"	1,200 lb.	4" x 2"	6⅛"	43
VPLDO/A-2430-AS	24" x 30"	1,200 lb.	4" x 2"	6⅛"	47
<b>STEEL PLATE DOLLIES</b>					
VPLDO/S-1418	14" x 18"	1,200 lb.	4" x 2"	6"	51
VPLDO/S-1824	18" x 24"	1,200 lb.	4" x 2"	6"	73
VPLDO/S-2430	24" x 30"	1,200 lb.	4" x 2"	6"	110
VPLDO/S-1418-AS	14" x 18"	1,200 lb.	4" x 2"	6"	51
VPLDO/S-1824-AS	18" x 24"	1,200 lb.	4" x 2"	6"	73
VPLDO/S-2430-AS	24" x 30"	1,200 lb.	4" x 2"	6"	110

SUFFIX -AS FEATURES FOUR (4) SWIVEL CASTERS WITH LOCKS

model  
VPLDO/A-2430



model  
VPLDO/S-1418



**CASTERS MAY NOT BE ATTACHED FOR SHIPPING PURPOSES**